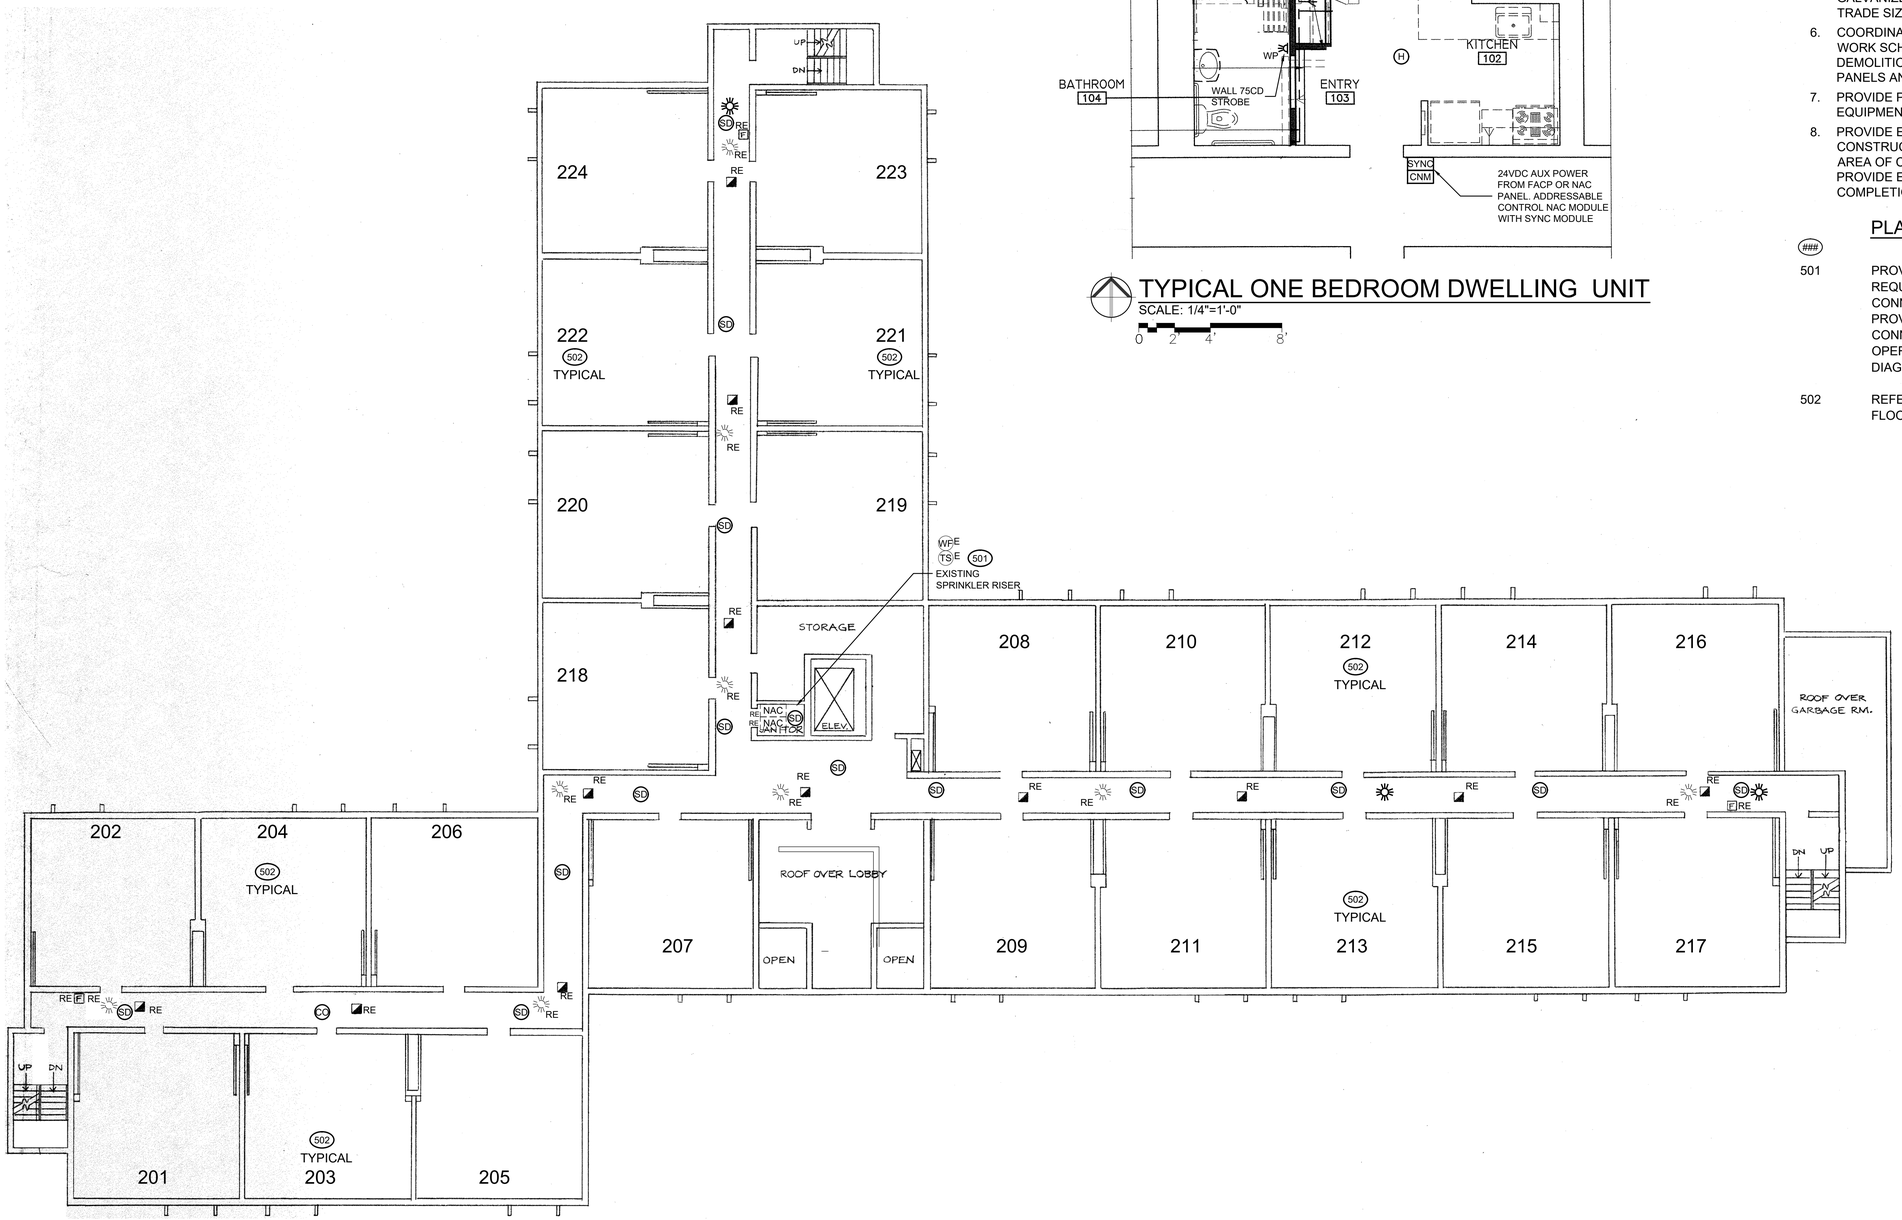

FIRE ALARM 2ND FLOOR PLAN

SCALE: 3/32"=1'-0"

0 4' 8' 16'

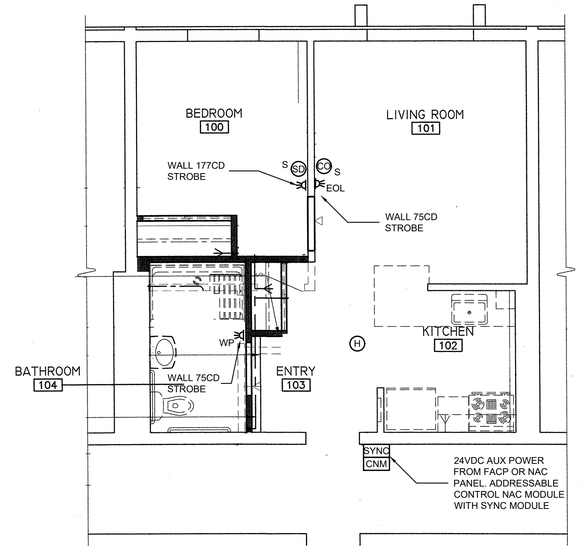

TYPICAL ONE BEDROOM DWELLING UNIT

SCALE: 1/4"=1'-0"

0 2' 4' 8'

GENERAL REQUIREMENT NOTES

1. EQUIPMENT AND DEVICES SHOWN DASHED DARK AND WITH A (RE) ARE EXISTING TO BE DEMO OR REPLACED, UNLESS NOTED OTHERWISE. REPLACE EXISTING FIRE ALARM DEVICE WITH NEW ADDRESSABLE FIRE ALARM DEVICE. MAINTAIN EXISTING FIRE ALARM J-BOXES, AND CONDUIT AS REQUIRE BACK TO THE NEW FIRE ALARM PANEL.
2. EQUIPMENT AND DEVICES SHOWN LIGHT AND WITH A (E) ARE EXISTING TO REMAIN, UNLESS NOTED OTHERWISE. PROVIDE NEW INTERFACE MODULES AS REQUIRED TO RECONNECT IS EXISTING EQUIPMENT OR DEVICE. PROVIDE J-BOXES, CONDUIT, CABLING, AND CONNECTIONS AS REQUIRED FOR A COMPLETE OPERATIONAL SYSTEM.
3. ALL WORK SHALL COMPLY WITH THE LATEST NEC AND LOCAL CODE AND EXCEED CODE REQUIREMENTS WERE CALLED OUT BY KCHA PLANS AND SPECIFICATION.
4. ALL EMPTY CONDUITS SHALL INCLUDE PULL STRING.
5. UNLESS NOTED OTHERWISE ALL WIRING SHALL BE IN GALVANIZED RIGID STEEL OR EMT CONDUIT WITH MINIMUM TRADE SIZE OF 3/4-INCH.
6. COORDINATE ALL WORK WITH OWNER REPRESENTATIVE FOR WORK SCHEDULES DETAILS PRIOR TO DECOMMISSIONED, DEMOLITION, RELOCATION, SHUT DOWN OF FIRE ALARM PANELS AND PANELBOARDS & ETC.
7. PROVIDE PATCH AND PAINT AS REQUIRED FOR ALL NEW EQUIPMENT AND DEVICES.
8. PROVIDE ELECTRICAL AND FIRE ALARM WORK ACCORDING TO CONSTRUCTION PHASING SCHEDULES. AT THE END OF EACH AREA OF CONSTRUCTION PER PHASING PLANNING SCHEDULE, PROVIDE ELECTRICAL AND FIRE ALARM TESTING TO INSURE COMPLETION OF WORK IS SATISFACTORY FOR ACCEPTANCE.

PLAN NOTES

###	
501	PROVIDE FIRE ALARM MONITOR DEVICES ON PLATE AS REQUIRE BY CODE FOR THE SPRINKLER RISER. CONNECT TO NEAREST EXISTING FIRE ALARM DEVICE. PROVIDE J-BOXES, CONDUIT, CABLING, AND CONNECTIONS AS REQUIRED FOR A COMPLETE OPERATIONAL SYSTEM. REFER TO FIRE ALARM DIAGRAM.
502	REFER TO TYPICAL FOR ALL DWELLING UNITS LAYOUT FLOOR PLAN SHEET FA5.01 & FA5.02.

TRES WEST ENGINEERS
TRES WEST ENGINEERS, INC.
2702 SOUTH 42ND STREET, SUITE 301
TACOMA, WA 98409-7315
Phone: 253.472.3300
www.treswest.com

ROGER W. KALL
STATE OF WASHINGTON
19798
REGISTERED PROFESSIONAL ENGINEER
01/08/2025

PROJECT TITLE
KING COUNTY HOUSING AUTHORITY YARDLEY ARMS APARTMENTS FIRE ALARM SYSTEM REPLACEMENT

PROJECT ADDRESS
1006 SW. 130TH ST.
BURIEN, WA. 98146

100% BID SET

REVISION	DATE
3	
2	
1	

BID SET	01/08/2025
ISSUED	DATE

SHEET TITLE
FIRE ALARM 2ND FLOOR PLAN

DRAWN	BCY
CHECKED	RWA
TWE JOB #	240801
CLIENT JOB #	KIZ300365
SHEET SCALE	SEE SHEET

SHEET NUMBER
FA5.02

240801-FA5.02 FIRE ALARM 2ND FLOOR.dwg
1/8/2025 11:02236