© GRIMM AND PARKER, P.C. 2014

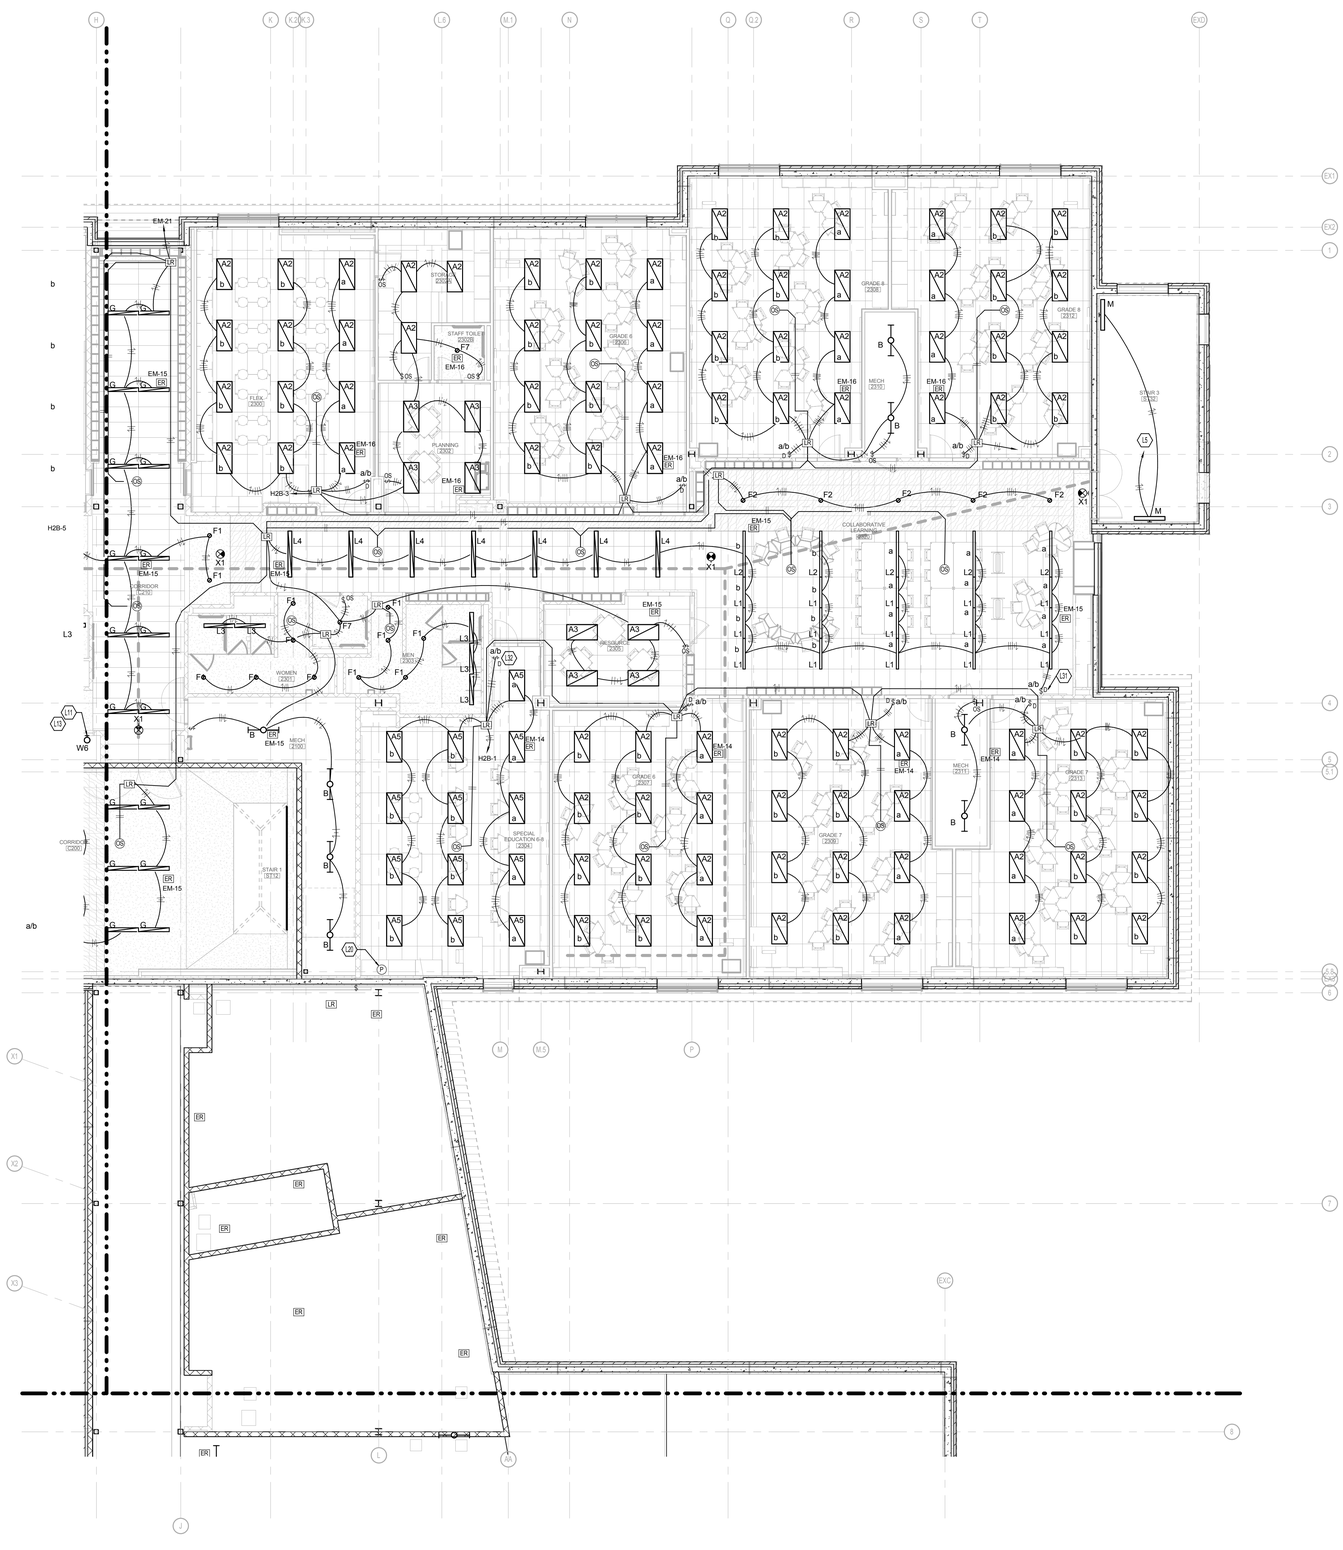

1 Second Floor - Lighting - Area C

SCALE: 1/8" = 1'-0"

0 2' 4' 8' 16' 24' 32'

GENERAL NOTES (LIGHTING):

A. REFER TO THE ARCHITECT'S REFLECTED CEILING PLANS, ELEVATIONS, AND CASEWORK DETAILS FOR EXACT LOCATIONS OF ALL WALL AND CEILING MOUNTED ELECTRICAL DEVICES.

B. CONTRACTOR SHALL FOLLOW BRANCH CIRCUITING LAY-OUT, AS INDICATED ON THE FLOOR PLANS, WITH A MAXIMUM OF THREE (3) BRANCH CIRCUITS PER HOMERUN. EACH BRANCH CIRCUIT SHALL BE PROVIDED WITH A DEDICATED NEUTRAL CONDUCTOR. DEDICATED NEUTRAL CONDUCTORS SHALL BE CONSIDERED CURRENT CARRYING. IF ADDITIONAL CONDUCTORS ARE RAN IN THE SAME CONDUIT WITH THOSE INDICATED, CONTRACTOR SHALL DERATE ALL CURRENT CARRYING CONDUCTORS PER N.E.C. #310.15(B)(3), AND UPSIZE CONDUIT AS REQUIRED PER N.E.C. #300.17 AND ANNEX C. MULTIWIRE BRANCH CIRCUITS AS DEFINED IN N.E.C #100 / 210.4 (CIRCUITS SHARING A COMMON NEUTRAL CONDUCTOR) SHALL NOT BE PERMITTED.

C. LOCATE CHAIN-HUNG INDUSTRIAL FIXTURES IN MECHANICAL ROOMS TO AVOID DUCTWORK AND PIPING, TO MAXIMIZE AVAILABLE LIGHT. SPACE AROUND EQUIPMENT, AIR HANDLERS, ETC. TO PROVIDE ADEQUATE LIGHTING TO ALL AREAS OF ROOM. PROVIDE ADDITIONAL FIXTURES OF SAME TYPE AS NEEDED TO FULFILL THIS REQUIREMENT.

D. LOCATE EXIT SIGNS FOR MAXIMUM VIEWING AREA TO IDENTIFY EGRESS PATHS AS INDICATED ON PLANS. COORDINATE LOCATIONS SUCH THAT ARCHITECTURAL FEATURES OR EQUIPMENT FROM OTHER TRADES DO NOT OBSTRUCT VIEW.

E. ALL LIGHTING FIXTURE LENSES, PARABOLIC LOUVERS, DOWNLIGHTING ALZAK CONES AND "PARACUBE" LOUVERS SHALL BE HANDLED WITH COTTON GLOVES DURING INSTALLATION TO AVOID FINGERPRINTS OR DIRT DEPOSITS. AT CLOSE OF PROJECT, AND AFTER CONSTRUCTION AIR FILTERS ARE CHANGED, REMOVE PROTECTIVE PLASTIC. ANY LOUVER OR CONE SHOWING DIRT OR FINGER PRINTS SHALL BE CLEANED WITH SOLVENT RECOMMENDED BY THE MANUFACTURER, OR REPLACED AS NECESSARY IN ORDER TO TURN OVER TO THE OWNER NEW FIXTURES AT OCCUPANCY.

F. RECESSED LUMINAIRES SHALL BE SECURED SUCH THAT THE FORCE REQUIRED INSERTING LAMPS, TRIMS, LENSES, LOUVERS, OR DOOR FRAMES DOES NOT SHIFT HOUSING. ALL TRIMS SHALL BE COMPLETELY FLUSH WITH FINISHED CEILINGS AT COMPLETION OF CONSTRUCTION.

G. CONTRACTOR SHALL PROVIDE UNSWITCHED EMERGENCY CONDUCTOR TO ALL EXIT SIGNS, AND NIGHT LIGHTS AS REQUIRED.

H. DIMMING CONDUCTORS ARE NOT INDICATED ON DRAWING. CONTRACTOR SHALL PROVIDE ALL DIMMING CONDUCTORS AS REQUIRED FOR FIXTURES INDICATED ON LUMINARE SCHEDULE TO BE DIMMING.

I. COORDINATE LIGHT SWITCH LOCATIONS IN ALL CLASSROOMS WITH ARCHITECTURAL INTERIOR ELEVATIONS.

J. ROUTE ALL EXTERIOR POLE MOUNTED LIGHTING CIRCUITS, BUILDING MOUNTED LIGHTING CIRCUITS, ETC. THROUGH A LIGHTING RELAY, CONTROLLED THROUGH BUILDING LIGHTING CONTROL SYSTEM. EXTERIOR LIGHTING SHALL BE CONTROLLED VIA PHOTOCELL, TIMECLOCK, OR TIME OF DAY SCHEDULING. PROVIDE CENTRALLY LOCATED PHOTOCELL, REFER MECHANICAL PENTHOUSE FOR PHOTOCELL LOCATION.

K. ALL CONDUIT PENETRATIONS THROUGH RATED WALLS SHALL BE SEALED TO MAINTAIN RATING. REFER TO DRAWING A-0.2 FOR RATED WALL LOCATIONS.

L. ALL CONDUIT PENETRATIONS THROUGH WALLS SHALL BE SEALED TO MAINTAIN SOUND TRANSFER RATINGS. REFER TO DRAWINGS A-0.8 AND A-3.20 FOR SOUND TRANSFER RATINGS.

M. IN ALL WALLS WITH SOUND ATTENUATION BLANKETS OR AN STC RATING LISTED - SWITCHES SHALL NOT BE LOCATED BACK-TO-BACK; JUNCTION BOXES SHALL BE OFFSET AND SEALED.

N. MOUNT DEVICES AND CONDUITS IN ACCORDANCE WITH STRUCTURAL RECOMMENDATIONS. REFER TO DRAWING S-0.0.

TAGGED NOTES	
L5	CONTINUE TO LIGHTING CIRCUIT BELOW.
L11	PROVIDE LIGHT IN CHASE ABOVE WINDOW. CONNECT TO NORMAL LIGHTING CIRCUIT IN CORRIDOR SPACE WITH 2#12, 1#12 GROUND IN 3/4" CONDUIT. PROVIDE PUSHBUTTON TIMER SWITCH SET TO 15 MINUTES ON CHASE WALL IN CORRIDOR FOR CONTROL OF FIXTURE.
L13	PROVIDE ELEVATOR LIGHTS LOCATED 12" BELOW TOP OF SHAFT. CONNECT LIGHTS TO LIGHTING CIRCUIT LOCATED IN BOTTOM OF PIT. PROVIDE LIGHT SWITCH IN TOP OF SHAFT FOR CONTROL OF LIGHTS IN BOTTOM.
L20	NETWORKED LIGHTING PHOTOCELL LOCATION. PHOTOCELL SHALL CONTROL ALL EXTERIOR FIXTURES. MOUNT PHOTOCELL ABOVE ROOF.
L31	DIM FIXTURES IN THIS AREA AS INDEPENDENT ZONE.
L32	PROVIDE SWITCH WITH TUNABLE WHITE CONTROLS.



KEYPLAN

N

2429 Members Way
Lexington, Ky 40504
Tel: 859.253.0892
http://www.cmtaegrs.com/

11720 Beltsville Drive
Suite 600
Calverton, MD 20705
Tel: 301.595.1000
www.grimmandparker.com

GRIMM AND PARKER

GP# 21553

LIGHTING - SECOND FLOOR AREA C

HOLABIRD ACADEMY PK-8
CITY OF BALTIMORE, MARYLAND

DATE	DESCRIPTION

EL-1.5

03/13/2017
BID SET

© GRIMM AND PARKER, P.C. 2014