© GRIMM AND PARKER, P.C. 2014

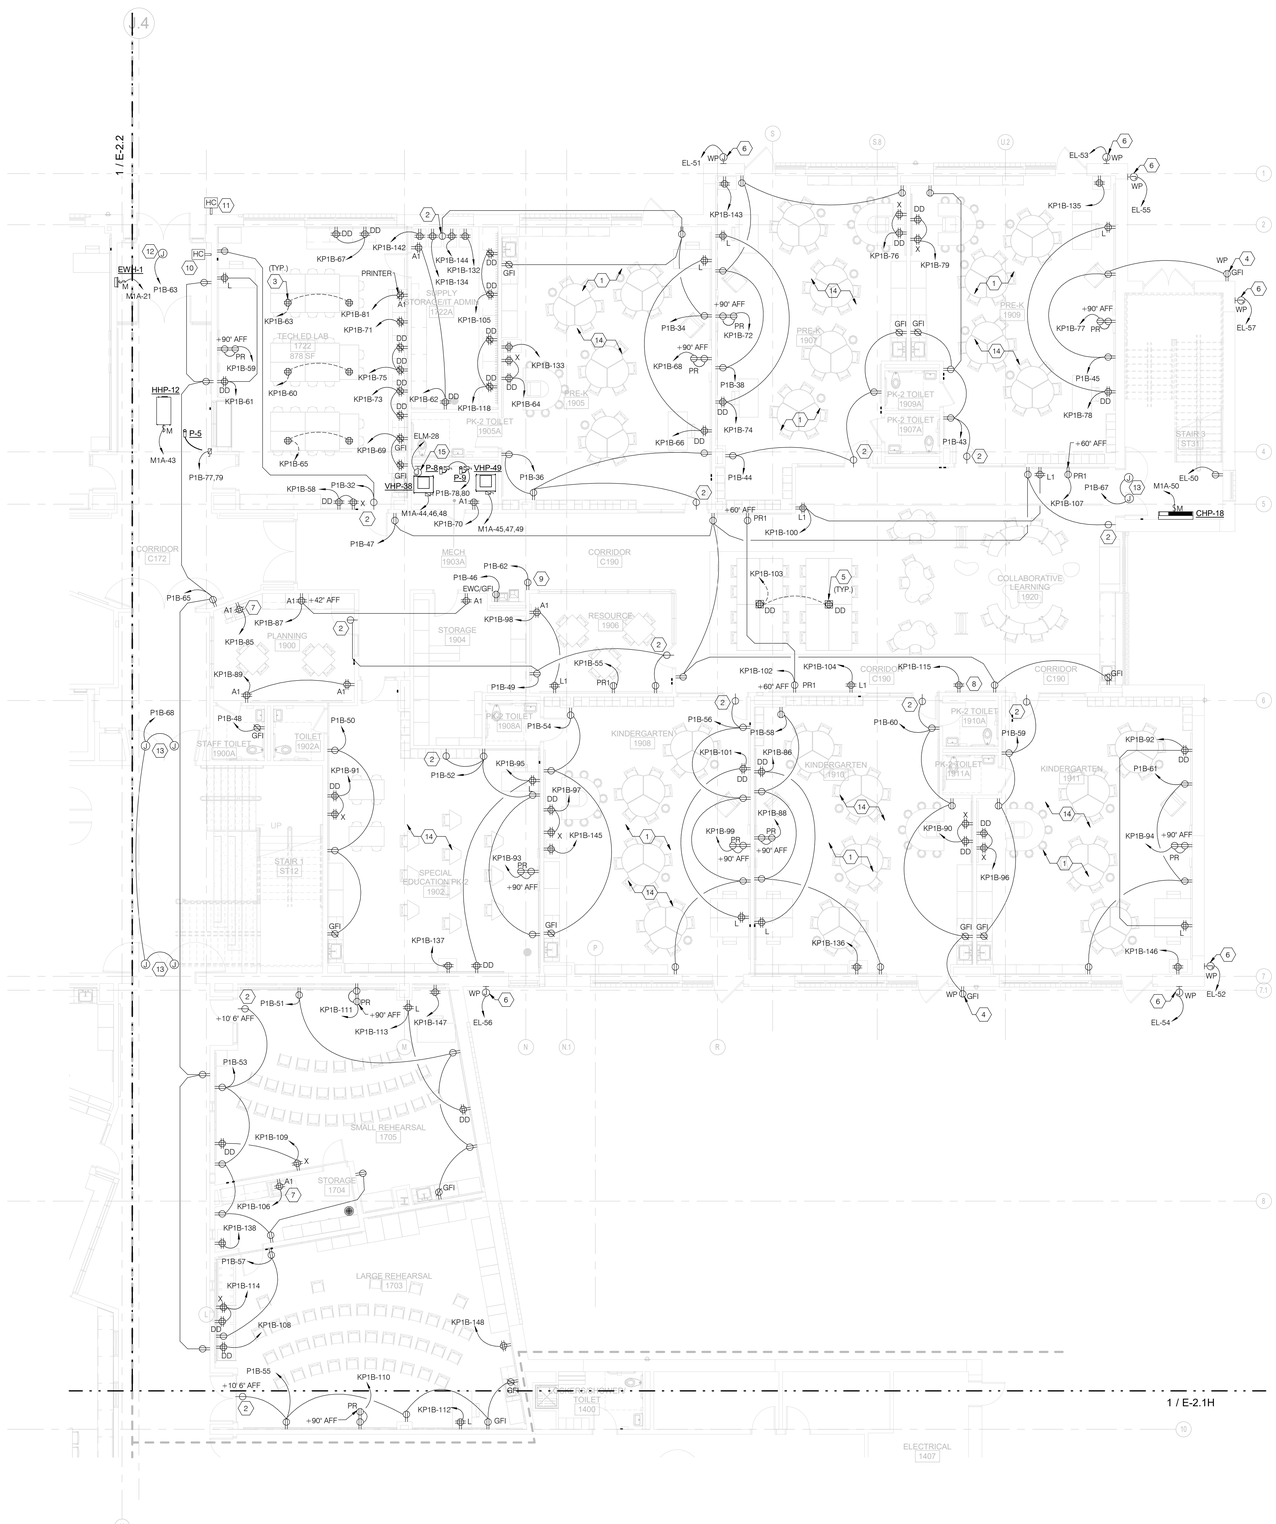

1 / E-2.3 PARTIAL FIRST FLOOR POWER PLAN – AREA C

SCALE: 1/8" = 1'-0"

GENERAL NOTES

1. REFER TO DRAWING E-0.1H/G FOR ELECTRICAL GENERAL NOTES, LEGEND AND ABBREVIATIONS. REFER TO DRAWING E-5.1 FOR POWER RISER DIAGRAM, E-6.1H/G FOR MECHANICAL/PLUMBING SCHEDULE AND E-6.2H/G THROUGH E-6.5H/G FOR PANEL SCHEDULES.
2. REFER TO ARCHITECTURAL DRAWINGS, ELEVATION & DETAILS FOR EXACT LOCATION OF ELECTRICAL DEVICES.
3. REFER TO MECHANICAL AND PLUMBING DRAWINGS FOR EXACT MECHANICAL AND PLUMBING EQUIPMENT LOCATIONS.
4. ALL OUTLETS ON EMERGENCY CIRCUITS SHALL BE RED IN COLOR.
5. ALL NEW RECEPTACLES, TELECOMMUNICATION OUTLETS WITH ASSOCIATED WIRING SHALL BE FLUSH MOUNTED. SURFACE MOUNTED OUTLETS, CONDUIT, RACEWAYS, ETC TO BE APPROVED BY ARCHITECT PRIOR TO INSTALLATION.
6. SEE ARCHITECTURAL DRAWINGS FOR EXACT LOCATION, MOUNTING HEIGHTS AND ADDITIONAL INFORMATION FOR POWER/DATA OUTLETS PRIOR TO ROUGH-IN WORK.
7. ALL TODDLER, INFANT, PRE-K AND KINDERGARTEN AND ALL CHILD CARE FACILITIES ROOM RECEPTACLES SHALL BE OF TAMPER-RESISTANT TYPE.

SHEET KEYNOTES

1. UNLESS OTHERWISE NOTED, ALL RECEPTACLES IN THIS AREA SHALL BE MOUNTED 16" TO THE TOP OF THE RECEPTACLE.
2. SIMPLEX RECEPTACLE FOR SLAVE CLOCK. COORDINATE WITH TECHNOLOGY CONSULTANT FOR EXACT LOCATION, MOUNTING HEIGHT AND CONNECTION REQUIREMENTS PRIOR TO INSTALLATION.
3. QUAD RECEPTACLE FOR CEILING HUNG POWER REELS. COORDINATE WITH ARCHITECT/EQUIPMENT VENDOR FOR EXACT LOCATION AND MOUNTING REQUIREMENTS PRIOR TO INSTALLATION.
4. SWITCHED RECEPTACLE. SWITCH LOCATION TO BE COORDINATED WITH THE ARCHITECT AND THE SCHOOL AUTHORITY.
5. ADA COMPLAINT FLOOR BOXES. CONTRACTOR TO PROVIDE WITH RECESSED CONDUIT IN THE SLAB TO NEAREST PARTITION WALL AND STUB UP TO THE CEILING AS REQUIRED.
6. JUNCTION BOX FOR CAMERA HEATERS. PROVIDE 3/4" EMPTY CONDUIT AND PULL STRING FOR SECURITY DEVICES. COORDINATE WITH ARCHITECT AND TECHNOLOGY CONSULTANT FOR EXACT LOCATION, MOUNTING HEIGHT AND CONNECTION REQUIREMENTS PRIOR TO INSTALLATION.
7. RECEPTACLE FOR COPIER. COORDINATE WITH EQUIPMENT SUPPLIER FOR EXACT NEMA CONFIGURATION OF COPIER PRIOR TO ROUGH-IN.
8. QUAD RECEPTACLE FOR CHARGING CART. COORDINATE EXACT LOCATION WITH ARCHITECTURAL DRAWINGS.
9. DUPLEX RECEPTACLE FOR DOUBLE SIDED SLAVE CLOCK. COORDINATE WITH TECHNOLOGY CONSULTANT FOR EXACT LOCATION, MOUNTING HEIGHT AND CONNECTION REQUIREMENTS PRIOR TO INSTALLATION.
10. "INTERIOR" WALL MOUNTED HANDICAP PUSH PLATE SWITCH FOR MOTORIZED DOOR OPENER. COORDINATE WITH ARCHITECT FOR EXACT LOCATION AND MOUNTING REQUIREMENTS PRIOR TO INSTALLATION.
11. "EXTERIOR" WALL MOUNTED HANDICAP PUSH PLATE SWITCH FOR MOTORIZED DOOR OPENER. COORDINATE WITH ARCHITECT FOR EXACT LOCATION AND MOUNTING REQUIREMENTS PRIOR TO INSTALLATION.
12. PROVIDE A JUNCTION BOX FOR MOTORIZED DOOR OPENER. CONTRACTOR SHALL VERIFY MOUNTING HEIGHT AND ALL REQUIREMENTS WITH DOOR HARDWARE SPECIFICATIONS.
13. PROVIDE JUNCTION BOX AT WALL (FOR EACH DOOR LEAF) FOR MAGNETIC DOOR HOLD OPEN TO TIE INTO FIRE ALARM SYSTEM. CONTRACTOR TO COORDINATE MOUNTING HEIGHT, AND LOCATION WITH DOOR HARDWARE SPECIFICATIONS.
14. ALL RECEPTACLES IN THIS ROOM SHALL BE TAMPER RESISTANT TYPE.
15. JUNCTION BOX FOR CONNECTION TO ATC CONTROL PANELS. FIELD COORDINATE WITH CONTROL AND MECHANICAL CONTRACTOR THE EXACT LOCATION.

REFER TO TECHNOLOGY CONSULTANT DRAWINGS FOR ALL IT, AV, TELEPHONE, DATA AND SECURITY SYSTEM LOCATION AND REQUIREMENTS.VENDOR FOR CONNECTION REQUIREMENTS PRIOR TO INSTALLATION.

KEY PLAN



SETTY
ONE SOUTH STREET, SUITE 2110
BALTIMORE, MARYLAND 21202
TEL 667-329-6035
MAINTENANCE MANAGEMENT SERVICES • ENERGY MANAGEMENT
ENERGY MANAGEMENT SERVICES • ENERGY BUSINESS CONSULTANTS
DISTRICT OF COLUMBIA • MARYLAND
www.SETTY.com
SAM@SETTY.com
PROJECT NUMBER: SAM@SETTY # # # #

11720 Beltsville Drive
Suite 600
Calverton, MD 20705
Tel: 301.595.1000
www.grimmandparker.com

GRIMM AND PARKER
GP# 21553

PARTIAL FIRST FLOOR POWER PLAN – AREA C

HOLABIRD ACADEMY PK-8
CITY OF BALTIMORE, MARYLAND

DATE	DESCRIPTION

E-2.3

03/13/2017
BID SET

© GRIMM AND PARKER, P.C. 2014