© GRIMM AND PARKER, P.C. 2014

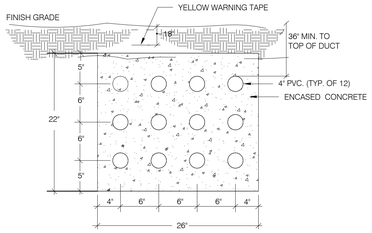

NOTE: PRIMARY DUCTBANK DETAIL SHOWN FOR REFERENCE ONLY. COORDINATE WITH BGE FOR EXACT DUCTBANK CONFIGURATION AND REQUIREMENTS.

2 / E-0.2H **12-WAY DUCT BANK**
SCALE: NOT TO SCALE

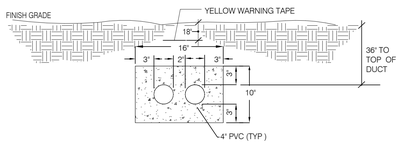

3 / E-0.2H **2-WAY DUCT BANK**
SCALE: NOT TO SCALE

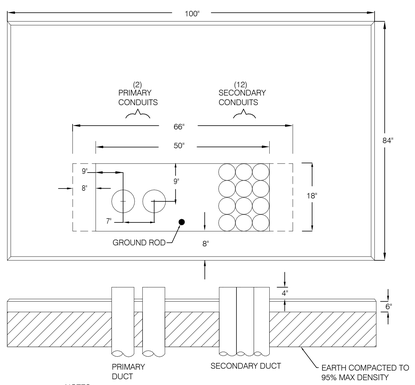

NOTES:
1. COORDINATE WITH BG & E PRIOR TO CONSTRUCTING PAD.
2. MAINTAIN 8 FEET OF UNOBSTRUCTED AREA IN FRONT OF PAD, 3 FEET ON SIDES AND REAR.

4 / E-0.2H **TRANSFORMER PAD PLAN DETAILS**
SCALE: NOT TO SCALE

CONCRETE ENCASED ELECTRIC CONDUIT SPECIFICATIONS:

1. DUCT BANKS MUST BE CONCRETE ENCASED IF ANY DUCTS ARE STACKED VERTICALLY (ONE ON TOP OF THE OTHER). DUCT BANKS MUST BE CONCRETE ENCASED.
2. BGE SHALL SPECIFY THE NUMBER, SIZE AND CONFIGURATION OF DUCTS.
3. SCHEDULE 20 PVC MUST BE USED FOR CONCRETE ENCASED DUCTS.
4. BENDS SHALL BE NO LESS THAN 36" IN RADIUS. A TOTAL OF TWO (2) 90-DEGREE BENDS ARE ALLOWED IN THE CONDUIT LINE. IF THIS STILL WILL NOT BE SUFFICIENT FOR THE CONDUIT DESIGN/CONSTRUCTION, CONTACT YOUR BGE REPRESENTATIVE. A MANHOLE, SPLICE/PULL BOX OR HAND BOX MAY BE REQUIRED.
5. DUCT SPACERS THAT MAINTAIN A 2" SEPARATION BETWEEN DUCTS ARE REQUIRED EVERY 6 1/2 - 7'.REQUIRED DEPTH OF CONDUIT FROM FINAL GRADE TO TOP OF CONDUIT/CONDUIT BANK (UNLESS OTHERWISE APPROVED BY BGE):

   30" FOR SECONDARY, MINIMUM.
   36" FOR PRIMARY, MINIMUM.
   48" MAXIMUM.
6. ONLY STANDARD 2,500-PSI READY-MIX CONCRETE WITH 1/2" PEA GRAVEL WILL BE APPROVED FOR ENCASEMENT.
7. AFTER CONCRETE CURES FOR 24 HOURS, BACKFILL AROUND DUCT BANK WITH CLEAN SELECT SOIL AND MECHANICALLY TAMP IN 8" LIFTS.
8. THE CUSTOMER SHALL PULL A MANDREL (1/2" SMALLER IN DIAMETER THAN THE CONDUIT AND 6' LONG) THROUGH EACH DUCT PRIOR TO BGE CABLE INSTALLATION, FOLLOWED BY A PULLING LINE (1800 LB MULE LINE PREFERRED), WHICH SHALL REMAIN IN EACH DUCT.
9. SECONDARY CUSTOMER SWITCHGEAR INSTALLATIONS THAT INCORPORATE METERING COMPARTMENTS, REQUIRE A PIT TO BE INSTALLED UNDER THAT COMPARTMENT. THE PIT SHALL BE 2' DEEP AND MEASURE 1" LESS THAN THE WIDTH AND DEPTH OF THE COMPARTMENT. DUCTS MUST ENTER THE PIT FROM THE BOTTOM, NOT THE SIDES. REFER TO THE BGE GAS & ELECTRIC METERING MANUAL.
10. THE CUSTOMER'S DUCT SHALL ENTER THE TRANSFORMER AS SHOWN ON PAGE TITLED "TURNING CONDUIT INTO TRANSFORMER PADS" IN SECTION TWO (2) OF THE BGE NATURAL GAS AND ELECTRIC SERVICE GUIDE BOOKLET.

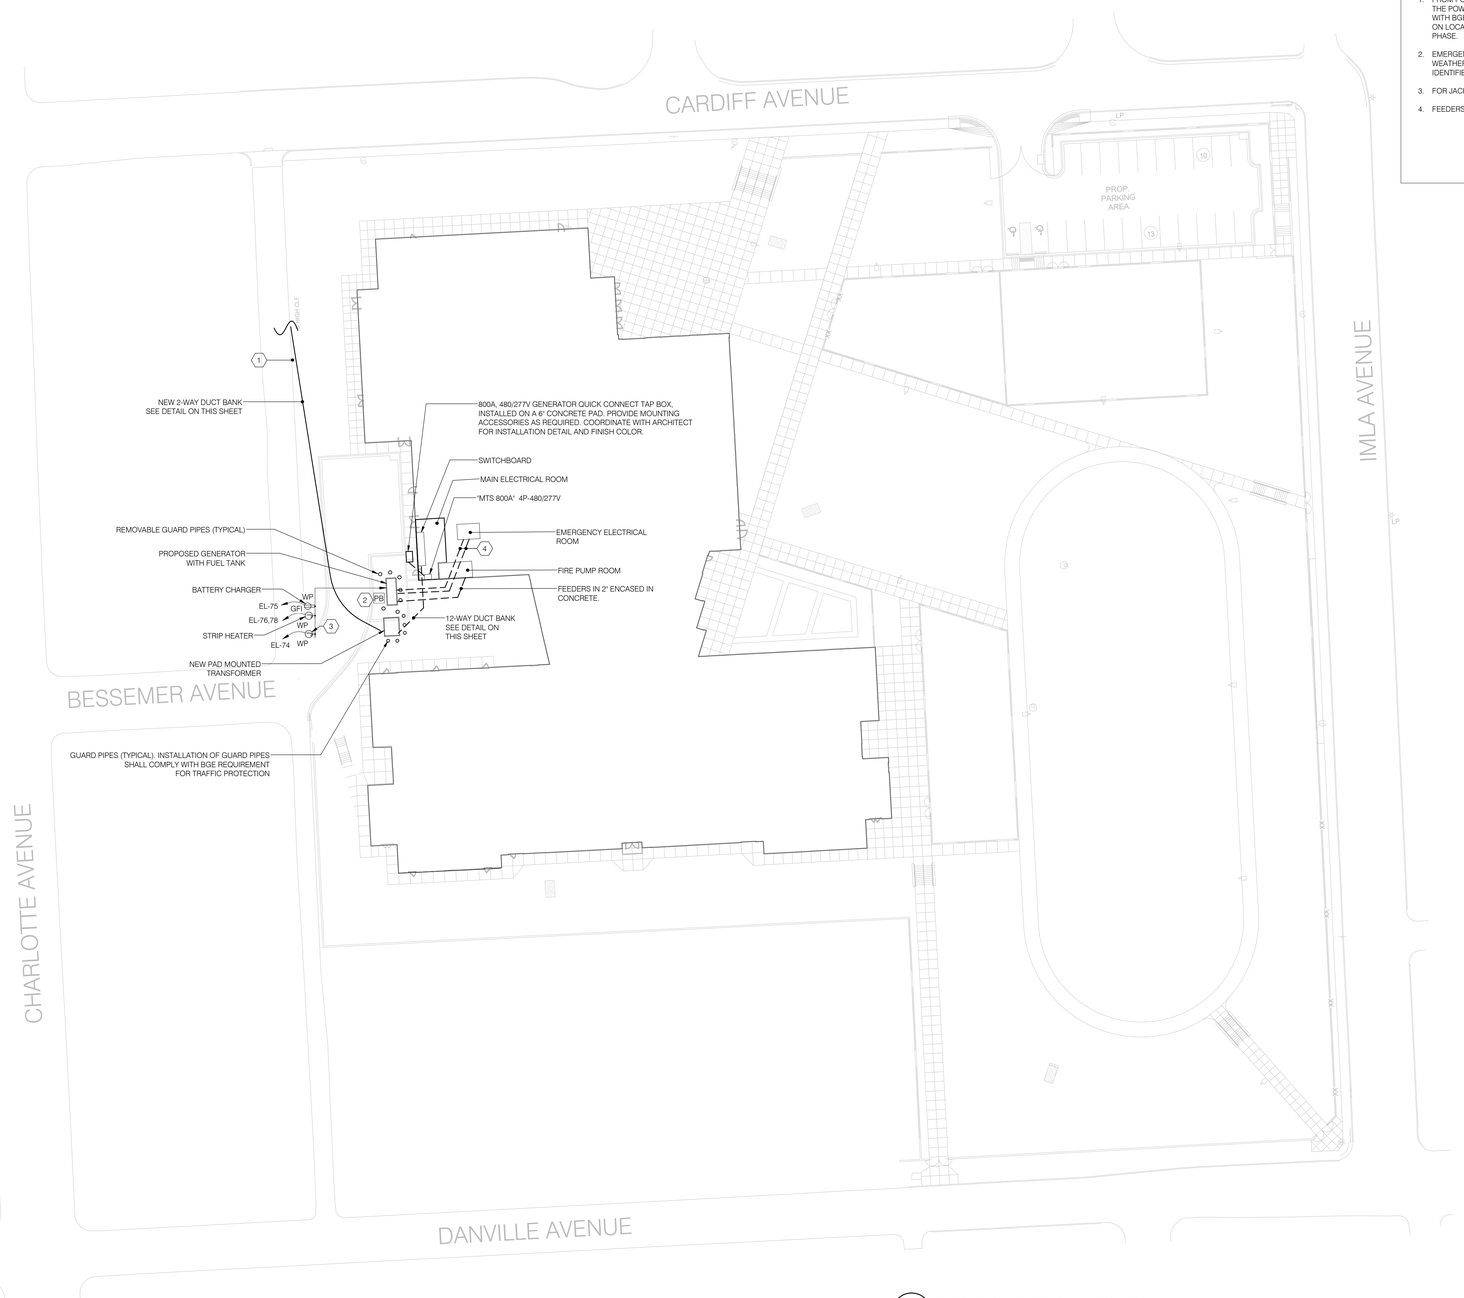

1 / E-0.2H **ELECTRICAL SITE PLAN -POWER**
SCALE: 1" = 30'-0"

GENERAL NOTES

1. ALL UTILITIES ARE TO BE FIELD LOCATED AND VERIFIED BY THE CONTRACTOR PRIOR TO START OF ANY WORK.
2. ANY UNCHARTED SUBSURFACE FOOTINGS, STRUCTURES, UTILITIES, ETC. ENCOUNTERED DURING EXCAVATION/ DEMOLITION WORK SHALL BE REMOVED AS DIRECTED BY THE OWNER'S REPRESENTATIVE. THE CONTRACTOR SHALL NOTIFY THE OWNER'S REPRESENTATIVE IMMEDIATELY IF THIS SITUATION OCCURS.
3. ALL WORK AREAS ARE TO BE PROTECTED WITH PLASTIC TRAFFIC DRUMS PLACED AT MAXIMUM 10' SPACING AS WELL AS PLASTIC SAFETY FENCE. NO OPEN TRENCHES SHALL BE PERMITTED TO EXIST OVERNIGHT.
4. THE CONTRACTOR SHALL TAKE PROPER PRECAUTIONS SO AS NOT TO DAMAGE EXISTING ADJACENT FACILITIES AND STRUCTURES. THE CONTRACTOR SHALL RESTORE DISTRIBUTED AREAS TO THEIR ORIGINAL CONDITIONS OR BETTER U.O.N.
5. REFER TO TELECOMM DRAWINGS FOR INCOMING TELEPHONE CONDUITS, HANDHOLES/MANHOLES LOCATIONS.
6. CONTRACTOR SHALL PROVIDE PULLBOXES, CONDUITS, HANDHOLES AS REQUIRED TO FACILITATE CABLE PULLING AND CONFORM WITH THE CODE REQUIRED NUMBER OF BENDS.

NEW WORK KEY NOTES

1. FROM POWER CO. INCOMING SERVICE. CONTRACTOR SHALL CONFIRM THE POWER CONNECTION AND LOCATION OF EXISTING UTILITY SERVICE WITH BGE PRIOR TO TIE-IN. BGE'S PREFERRED TERMINATION POINT BASED ON LOCATION OF FACILITIES SUBJECT TO CHANGE DURING BGE'S DESIGN PHASE.
2. EMERGENCY PUSH BUTTON LOCATED EXTERNAL TO THE WEATHERPROOF ENCLOSURE AND SHOULD BE APPROPRIATELY IDENTIFIED PER NFPA 110 APPENDIX 1.5.6.5.6
3. FOR JACKET HEATER. RUN 2 #10 + 1 #10G IN 3/4"C TO PANEL INDICATED.
4. FEEDERS ENCASED IN CONCRETE.

SETTY
ONE SOUTH STREET, SUITE 1130
BALTIMORE, MARYLAND 21202
TEL 667-329-6035
MAINTENANCE/ENERGY MANAGEMENT
ENERGY MANAGEMENT SERVICES • DESIGN BUILD SERVICES
CONSULTING • ENGINEERING • CONSTRUCTION
DISTRICT OF COLUMBIA • MARYLAND
www.SETTY.com

PROJECT NUMBER: SA2017-17 # # # #

11720 Beltsville Drive
Suite 600
Calverton, MD 20705
Tel: 301.595.1000
www.grimmandparker.com
GRIMM AND PARKER

GP# 21553

ELECTRICAL SITE PLAN- POWER
HOLABIRD ACADEMY PK-8
CITY OF BALTIMORE, MARYLAND

DATE	DESCRIPTION

E-0.2H
03/13/2017
BID SET

© GRIMM AND PARKER, P.C. 2014