© GRIMM AND PARKER, P.C. 2014

GENERAL NOTES

1. REFER TO DRAWING E-0.1H FOR GENERAL DEMOLITION NOTES, LEGEND AND ABBREVIATIONS.
2. DEMOLITION WORK REFERED TO ON THIS SHEET SHALL ONLY APPLY TO AREAS THAT ARE PART OF PHASE 2. MAINTAIN CONTINUITY OF EXISTING CIRCUITS SERVING EQUIPMENT AND DEVICES IN AREAS THAT ARE NOT PART OF THIS PHASE. MODIFY EXISTING CIRCUITS AS REQUIRED TO MAINTAIN EXISTING CIRCUITRY AND PROPER OPERATION OF THE EXISTING SYSTEM.
3. REFER TO MECHNICAL AND PLUMBING DEMOLITION DRAWINGS FOR EQUIPMENT BEING DEMOLISHED. REMOVE ASSOCIATED ELECTRICAL DEVICES, COMPONENTS AND FEEDERS.
4. CONTRATOR TO DEMOLISH ALL ELECTRICAL SYSTEM AND ASSOCIATED EQUIPMENT, DEVICES AND FEEDERS. REMOVE ALL WIRING AND CONDUIT BACK TO SOURCE OF SUPPLY. ABANDON AND CAP ALL CONCEALED EXISTING CONDUITS LOCATED IN THE CONCRETE WALL OR CEILING/FLOOR SLAB.

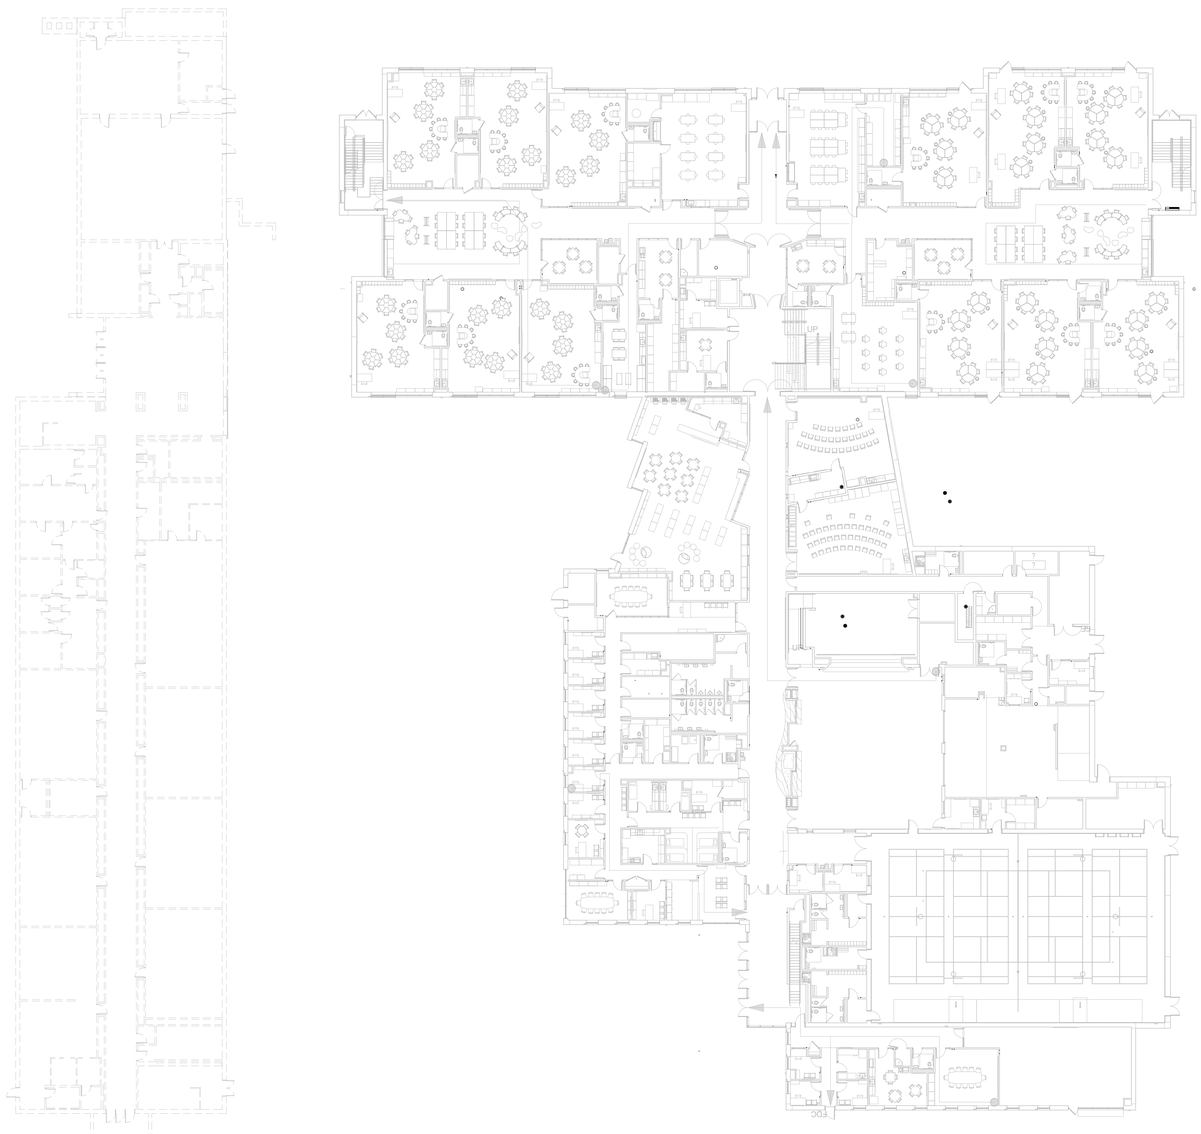

1 ED-0.4H HOLABIRD - DEMO PHASE 2
SCALE: 1" = 20'-0"

KEY PLAN



SETTY
ONE SOUTH STREET, SUITE 1130
BALTIMORE, MARYLAND 21202
TEL 667-329-5035
MAINTENANCE MANAGEMENT SERVICES • PROJECT MANAGEMENT
ENERGY MANAGEMENT SERVICES • DESIGN BUILD SERVICES
CONSTRUCTION MANAGEMENT SERVICES
DISTRICT OF COLUMBIA • MARYLAND
www.SETTY.com
SA2017-1-1-4-4-4-4
PROJECT NUMBER

11720 Beltsville Drive
Suite 600
Calverton, MD 20705
Tel: 301.595.1000
www.grimmandparker.com
GRIMM AND PARKER

GP# 21553

ELECTRICAL OVERALL PLAN - DEMOLITION

HOLABIRD ACADEMY PK-8
CITY OF BALTIMORE, MARYLAND

DATE	DESCRIPTION

ED-0.4H

03/13/2017
BID SET

© GRIMM AND PARKER, P.C. 2014