© GRIMM AND PARKER, P.C. 2014

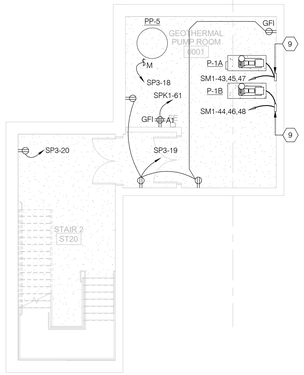

2 E-2.2 BASEMENT POWER PLAN

SCALE: NOT TO SCALE

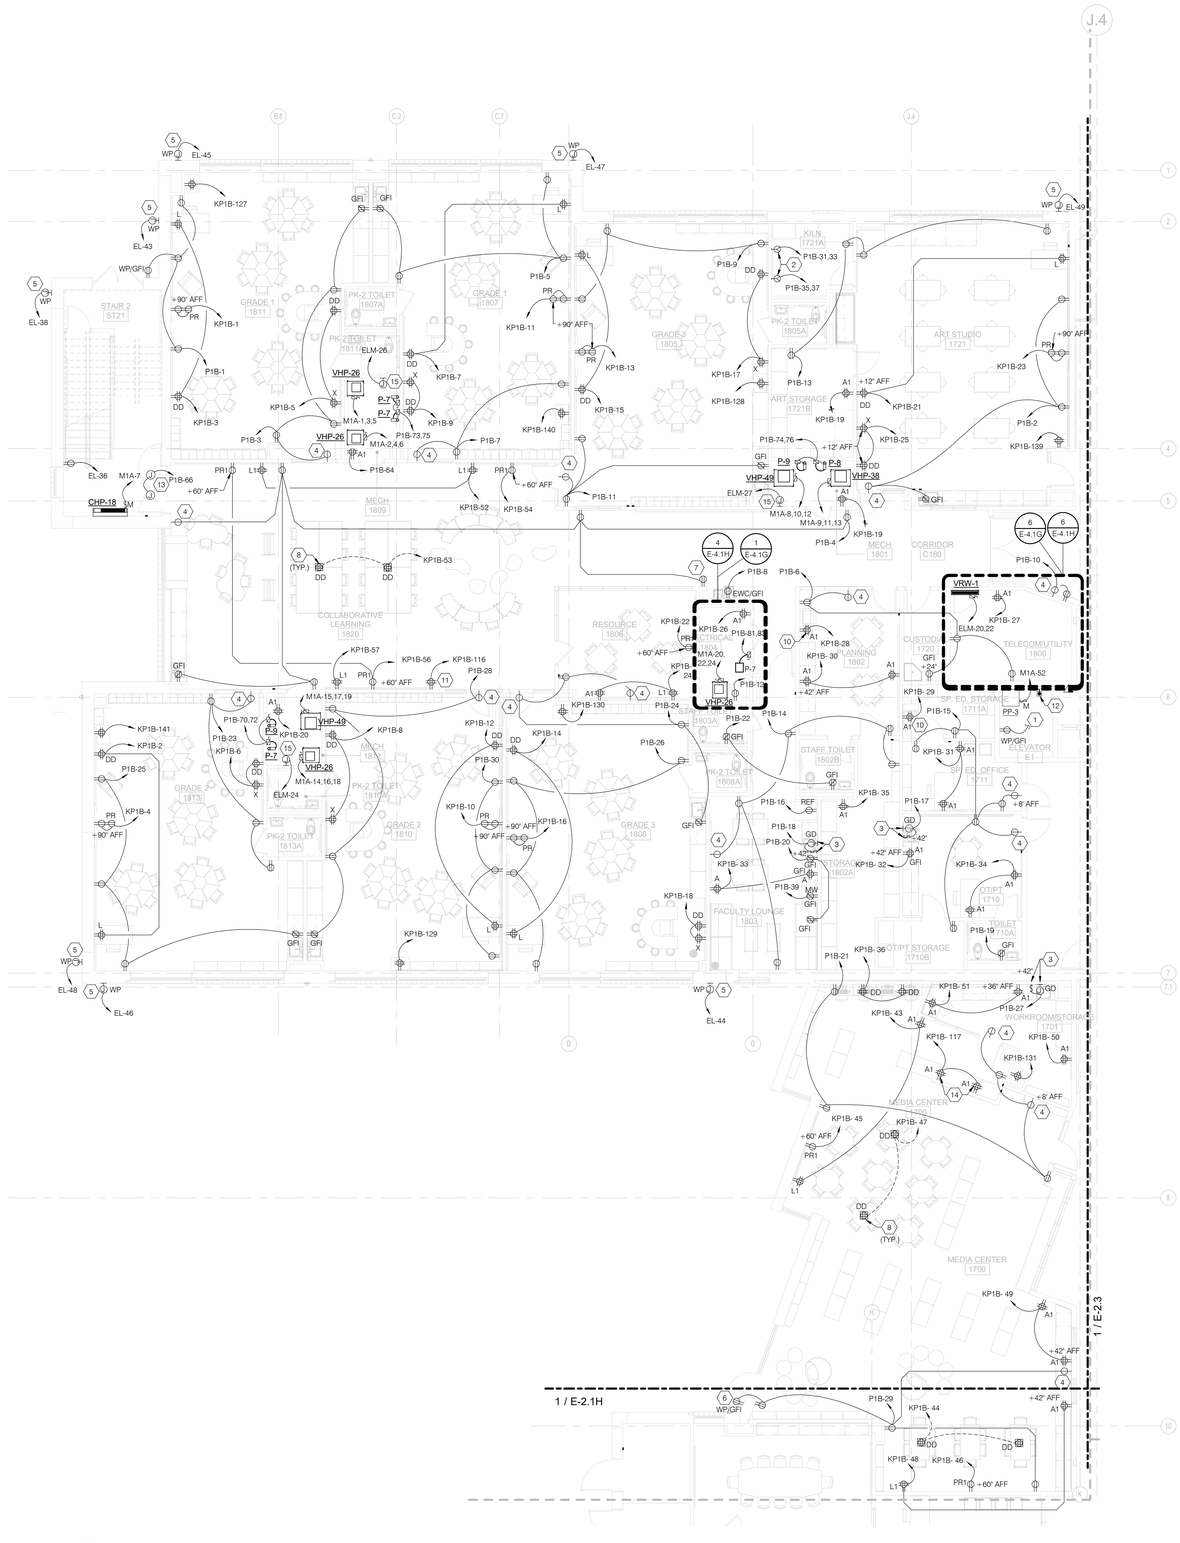

1 E-2.2 PARTIAL FIRST FLOOR POWER PLAN – AREA B

SCALE: 1/8" = 1'-0"

GENERAL NOTES

1. REFER TO DRAWING E-0.1H/G FOR ELECTRICAL GENERAL NOTES, LEGEND AND ABBREVIATIONS. REFER TO DRAWING E-5.1 FOR POWER RISER DIAGRAM, E-6.1H/G FOR MECHANICAL/PLUMBING SCHEDULE AND E-6.2H/G THROUGH E-6.5H/G FOR PANEL SCHEDULES.
2. REFER TO ARCHITECTURAL DRAWINGS, ELEVATION & DETAILS FOR EXACT LOCATION OF ELECTRICAL DEVICES.
3. REFER TO MECHANICAL AND PLUMBING DRAWINGS FOR EXACT MECHANICAL AND PLUMBING EQUIPMENT LOCATIONS.
4. ALL OUTLETS ON EMERGENCY CIRCUITS SHALL BE RED IN COLOR.
5. ALL NEW RECEPTACLES, TELECOMMUNICATION OUTLETS WITH ASSOCIATED WIRING SHALL BE FLUSH MOUNTED. SURFACE MOUNTED OUTLETS, CONDUIT, RACEWAYS, ETC TO BE APPROVED BY ARCHITECT PRIOR TO INSTALLATION.
6. SEE ARCHITECTURAL DRAWINGS FOR EXACT LOCATION, MOUNTING HEIGHTS AND ADDITIONAL INFORMATION FOR POWER/DATA OUTLETS PRIOR TO ROUGH-IN WORK.
7. ALL TODDLER, INFANT, PRE-K AND KINDERGARTEN AND ALL CHILD CARE FACILITIES ROOM RECEPTACLES SHALL BE OF TAMPER-RESISTANT TYPE.

SHEET KEYNOTES

1. COORDINATE WITH ELEVATOR CONTRACTOR FOR EXACT OUTLET LOCATION IN PIT ROOM PRIOR TO INSTALLATION. CONNECT TO THE LIGHT FIXTURE IN PIT AS SHOWN ON DRAWING ON ELECTRICAL LIGHTING PLAN EL1.2.
2. RECEPTACLE FOR KILN. FIELD COORDINATE EXACT LOCATION AND VERIFY POWER REQUIREMENT PRIOR TO WIRING.
3. JUNCTION BOX UNDER COUNTER FOR GARBAGE DISPOSAL (1PH.3/4HP-120V) AND MANUAL CONTROL SWITCH, MOUNTING @ 42" AFF.
4. SIMPLEX RECEPTACLE FOR SLAVE CLOCK. COORDINATE WITH TECHNOLOGY CONSULTANT FOR EXACT LOCATION, MOUNTING HEIGHT AND CONNECTION REQUIREMENTS PRIOR TO INSTALLATION.
5. JUNCTION BOX FOR CAMERA HEATERS. PROVIDE 3/4" EMPTY CONDUIT AND PULL STRING FOR SECURITY DEVICES. COORDINATE WITH ARCHITECT AND TECHNOLOGY CONSULTANT FOR EXACT LOCATION, MOUNTING HEIGHT AND CONNECTION REQUIREMENTS PRIOR TO INSTALLATION.
6. SWITCHED RECEPTACLE. SWITCH LOCATION TO BE COORDINATED WITH THE ARCHITECT AND THE SCHOOL AUTHORITY.
7. DUPLEX RECEPTACLE FOR DOUBLE SIDED SLAVE CLOCK. COORDINATE WITH TECHNOLOGY CONSULTANT FOR EXACT LOCATION, MOUNTING HEIGHT AND CONNECTION REQUIREMENTS PRIOR TO INSTALLATION.
8. ADA COMPLAINT FLOOR BOXES. CONTRACTOR TO PROVIDE WITH RECESSED CONDUIT IN THE SLAB TO NEAREST PARTITION WALL AND STUB UP TO THE CEILING AS REQUIRED.
9. VFD CONTROLLER. REFER TO MECHANICAL DRAWINGS FOR EXACT LOCATION PRIOR TO INSTALLATION.
10. RECEPTACLE FOR COPIER. COORDINATE WITH EQUIPMENT SUPPLIER FOR EXACT NEMA CONFIGURATION OF COPIER PRIOR TO ROUGH-IN.
11. QUAD RECEPTACLE FOR CHARGING CART. COORDINATE EXACT LOCATION WITH ARCHITECTURAL DRAWINGS.
12. ELEVATOR EMERGENCY STOP SWITCH AT ELEVATOR PIT. COORDINATE EXACT LOCATION WITH ELEVATOR VENDOR AND CONTRACTOR. SEE DETAIL 5 ON DRAWING E-7.1.
13. PROVIDE JUNCTION BOX AT WALL (FOR EACH DOOR LEAF) FOR MAGNETIC DOOR HOLD OPEN TO TIE INTO FIRE ALARM SYSTEM. CONTRACTOR TO COORDINATE MOUNTING HEIGHT, AND LOCATION WITH DOOR HARDWARE SPECIFICATIONS.
14. REFER ARCHITECTURAL PLANS FOR EXACT LOCATION OF POWER OUTLETS IN MILLWORK DESKS.
15. JUNCTION BOX FOR CONNECTION TO ATC CONTROL PANELS. FIELD COORDINATE WITH CONTROL AND MECHANICAL CONTRACTOR THE EXACT LOCATION.

REFER TO TECHNOLOGY CONSULTANT DRAWINGS FOR ALL IT, AV, TELEPHONE, DATA AND SECURITY SYSTEM LOCATION AND REQUIREMENTS.VENDOR FOR CONNECTION REQUIREMENTS PRIOR TO INSTALLATION.

KEY PLAN



SETTY
ONE SOUTH STREET, SUITE 1110
BALTIMORE, MARYLAND 21202
TEL 667-309-8005
MAYER*BERGMANN*SETTY*CONSULTANT
ENERGY MANAGEMENT SERVICES • DESIGN BUILD SERVICES
CONSULTING ENGINEERS • CONSTRUCTION MANAGEMENT
DISTRICT OF COLUMBIA • MARYLAND
WWW.MBSETTY.COM
SAC#1111 # # # #
PROJECT NUMBER

11720 Beltsville Drive
Suite 600
Calverton, MD 20705
Tel: 301.595.1000
www.grimmandparker.com
G+P GRIMM AND PARKER

GP# 21553

PARTIAL FIRST FLOOR POWER PLAN – AREA B

HOLABIRD ACADEMY PK-8
CITY OF BALTIMORE, MARYLAND

DATE	DESCRIPTION

E-2.2

03/13/2017
BID SET

© GRIMM AND PARKER, P.C. 2014