© GRIMM AND PARKER, P.C. 2014

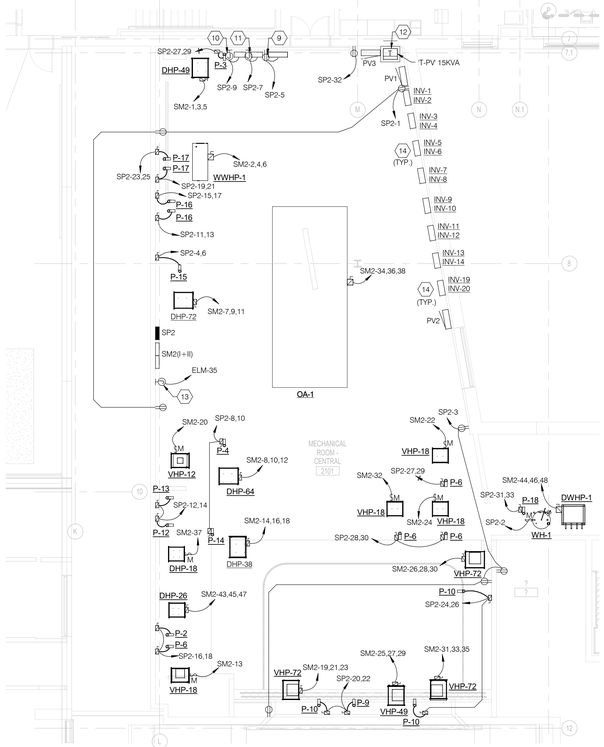

2 / E-2.5 PARTIAL PENT HOUSE POWER PLAN – MECHANICAL ROOM

SCALE: 1/8" = 1'-0"

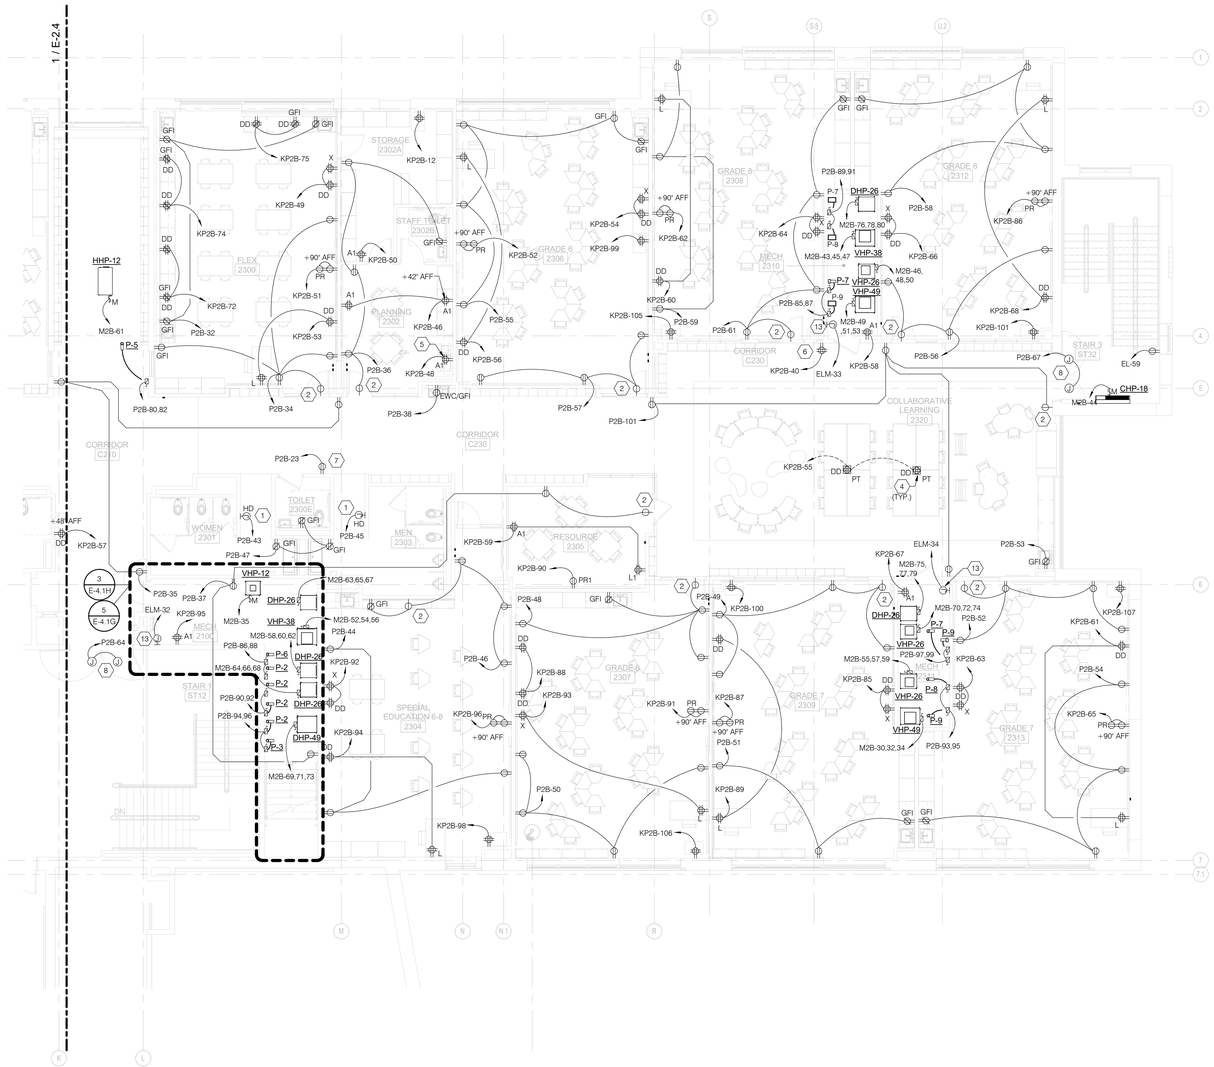

1 / E-2.5 PARTIAL SECOND FLOOR POWER PLAN – AREA C

SCALE: 1/8" = 1'-0"

GENERAL NOTES

1. REFER TO DRAWING E-0.1H/G FOR ELECTRICAL GENERAL NOTES, LEGEND AND ABBREVIATIONS. REFER TO DRAWING E-5.1 FOR POWER RISER DIAGRAM, E-6.1H/G FOR MECHANICAL/PLUMBING SCHEDULE AND E-6.2H/G THROUGH E-6.5H/G FOR PANEL SCHEDULES.
2. REFER TO ARCHITECTURAL DRAWINGS, ELEVATION & DETAILS FOR EXACT LOCATION OF ELECTRICAL DEVICES.
3. REFER TO MECHANICAL AND PLUMBING DRAWINGS FOR EXACT MECHANICAL AND PLUMBING EQUIPMENT LOCATIONS.
4. ALL OUTLETS ON EMERGENCY CIRCUITS SHALL BE RED IN COLOR.
5. ALL NEW RECEPTACLES, TELECOMMUNICATION OUTLETS WITH ASSOCIATED WIRING SHALL BE FLUSH MOUNTED. SURFACE MOUNTED OUTLETS, CONDUIT, RACEWAYS, ETC TO BE APPROVED BY ARCHITECT PRIOR TO INSTALLATION.
6. SEE ARCHITECTURAL DRAWINGS FOR EXACT LOCATION, MOUNTING HEIGHTS AND ADDITIONAL INFORMATION FOR POWER/DATA OUTLETS PRIOR TO ROUGH-IN WORK.
7. ALL TODDLER, INFANT, PRE-K AND KINDERGARTEN AND ALL CHILD CARE FACILITIES ROOM RECEPTACLES SHALL BE OF TAMPER-RESISTANT TYPE.

SHEET KEYNOTES

1. JUNCTION BOX FOR AUTOMATIC HAND DRYER. COORDINATE WITH EQUIPMENT VENDOR FOR CONNECTION REQUIREMENTS AND WITH ARCHITECT FOR EXACT MOUNTING HEIGHT AND LOCATION.
2. SIMPLEX RECEPTACLE FOR SLAVE CLOCK. COORDINATE WITH TECHNOLOGY CONSULTANT FOR EXACT LOCATION, MOUNTING HEIGHT AND CONNECTION REQUIREMENTS PRIOR TO INSTALLATION.
3. JUNCTION BOX FOR CAMERA HEATERS. PROVIDE 3/4" EMPTY CONDUIT AND PULL STRING FOR SECURITY DEVICES. COORDINATE WITH ARCHITECT AND TECHNOLOGY CONSULTANT FOR EXACT LOCATION, MOUNTING HEIGHT AND CONNECTION REQUIREMENTS PRIOR TO INSTALLATION.
4. FLUSH MOUNTED ADA COMPLAINT POKE THRU FOR POWER AND OUTLETS. CONTRACTOR TO PROVIDE LEGRAND WIREMOLD 6A7 EVOLUTION SERIES POKE-THRU DEVICE AND COORDINATE WITH ARCHITECT FOR EXACT LOCATIONS AND CONNECTION REQUIREMENTS PRIOR TO INSTALLATION.
5. RECEPTACLE FOR COPIER. COORDINATE WITH EQUIPMENT SUPPLIER FOR EXACT NEMA CONFIGURATION OF COPIER PRIOR TO ROUGH-IN.
6. QUAD RECEPTACLE FOR CHARGING CART. COORDINATE EXACT LOCATION WITH ARCHITECTURAL DRAWINGS.
7. QUAD RECEPTACLE FOR DOUBLE FACE SLAVE CLOCK. COORDINATE WITH TECHNOLOGY CONSULTANT FOR EXACT LOCATION, MOUNTING HEIGHT AND CONNECTION REQUIREMENTS PRIOR TO INSTALLATION.
8. PROVIDE JUNCTION BOX AT WALL (FOR EACH DOOR LEAF) FOR MAGNETIC DOOR HOLD OPEN TO TIE INTO FIRE ALARM SYSTEM. CONTRACTOR TO COORDINATE MOUNTING HEIGHT, AND LOCATION WITH DOOR HARDWARE SPECIFICATIONS.
9. DUPLEX RECEPTACLE FOR TOUCH SCREEN COMPUTER. COORDINATE WITH ARCHITECT AND EQUIPMENT VENDOR FOR EXACT LOCATION, MOUNTING HEIGHT AND CONNECTION REQUIREMENTS PRIOR TO INSTALLATION.
10. JUNCTION BOX FOR AIRCUITY COMPRESSOR AND MAIN CONTROLS. COORDINATE WITH ARCHITECT AND EQUIPMENT VENDOR FOR EXACT LOCATION, MOUNTING HEIGHT AND CONNECTION REQUIREMENTS PRIOR TO INSTALLATION
11. JUNCTION BOX FOR CONTROLS HEAD END. COORDINATE WITH ARCHITECT AND EQUIPMENT VENDOR FOR EXACT LOCATION, MOUNTING HEIGHT AND CONNECTION REQUIREMENTS PRIOR TO INSTALLATION.
12. REFER TO 'W' SERIES DRAWINGS FOR TRANSFORMER TYPE AND EXACT LOCATION. CONTRACTOR TO VERIFY WITH STRUCTURAL ENGINEER AND PROVIDE WALL OR CEILING MOUNTED TRANSFORMER AS RECOMMENDED BY THEM.
13. JUNCTION BOX FOR CONNECTION TO ATC CONTROL PANELS. FIELD COORDINATE WITH CONTROL AND MECHANICAL CONTRACTOR THE EXACT LOCATION.
14. REFER TO 'W' SERIES DRAWINGS FOR COMPLETE PHOTOVOLTAIC DESIGN.

REFER TO TECHNOLOGY CONSULTANT DRAWINGS FOR ALL IT, AV, TELEPHONE, DATA AND SECURITY SYSTEM LOCATION AND REQUIREMENTS.VENDOR FOR CONNECTION REQUIREMENTS PRIOR TO INSTALLATION.

KEY PLAN



SETTY
ONE SOUTH STREET, SUITE 1110
BALTIMORE, MARYLAND 21202
TEL 667-329-5035
MAINTENANCE ENGINEERING MANAGEMENT
ENERGY MANAGEMENT SERVICES • DESIGN BUILD PROJECTS
CONSULTING ENGINEERS • CONSTRUCTION MANAGERS
DISTRICT OF COLUMBIA • MARYLAND
www.SETTY.com
SAM@SETTY.com

PROJECT NUMBER: SA2017-F-8-F-F

11720 Beltsville Drive
Suite 600
Calverton, MD 20705
Tel: 301.595.1000
www.grimmandparker.com
GRIMM AND PARKER

GP# 21553

PARTIAL SECOND FLOOR POWER PLAN – AREA C

HOLABIRD ACADEMY PK-8
CITY OF BALTIMORE, MARYLAND

DATE	DESCRIPTION

E-2.5

03/13/2017
BID SET

© GRIMM AND PARKER, P.C. 2014