GENERAL NOTES THIS SHEET:

1. EXISTING PANEL P IS TO REMAIN AND BREAKERS TO BE MODIFIED AS SCHEDULED IN RESPECTIVE PANELBOARD SCHEDULE.
2. EXISTING PANEL LP1 IS TO REMAIN AND BREAKERS TO BE MODIFIED AS SCHEDULED IN RESPECTIVE PANELBOARD SCHEDULE.
3. EXISTING MAIN PANELBOARD IS TO REMAIN AND BREAKERS TO BE MODIFIED AS SCHEDULED IN RESPECTIVE PANELBOARD SCHEDULE.
4. PROVIDE LOCKOUT BRACKET ON HAND DRYER BREAKERS.

NOTES THIS SHEET:

1. ROOF TOP AIR HANDLER SHALL REMAIN POWERED AND NOT DISCONNECTED DURING PROJECT CONSTRUCTION.
2. BREAKER, WIRING, CONDUIT AND UNIT DISCONNECT SHALL REMAIN IN SERVICE DURING CONSTRUCTION.
3. BREAKER FOR ELECTRIC WATER COOLER SHALL BE GFCI TYPE.
4. CUT FLOOR FOR FLOOR BOX ON GRADE AND TO NEAREST WALL FOR POWER AND DATA CONDUITS TO BE INSTALLED CONCEALED TO ABOVE CEILING.
5. EXISTING SPLIT SYSTEM TO REMAIN AND STAY CONNECTED.
6. BREAKER FOR DISHWASHER SHALL BE GFCI TYPE.
7. ADD 208V -1Ø -20 AMP BREAKER FOR SPLIT COOLING SYSTEM, IN EXISTING PANELBOARD LP2. MOVE DISCONNECTED BREAKERS AROUND FOR INSTALLATION OF NEW 2 POLE, 20 AMP BREAKER. CONNECT TO SPLIT COOLING SYSTEM WITH 208V- 1Ø - 30 AMP, NEMA - 3R, FUSED DISCONNECT SWITCH WITH TWO FUSES SIZE AS RECOMMENDED BY SYSTEMS MANUFACTURER. CONNECT WITH 3-#12 WIRES & 1-#12 EGC IN 3/4" CONDUIT. SEE DETAIL SHEETS FOR FREE STANDING ROOF TOP DISCONNECT MOUNTING DETAIL AND ROOF PENETRATION DETAIL. CONNECT INDOOR BLOWER UNIT FROM OUTDOOR CONDENSER UNIT. PROTECT BLOWER WITH MP SWITCH. CONNECT ROOFTOP RECEPTACLE TO 120V-1ø-20 AMP CIRCUIT BREAKER LP3-19.
8. PROVIDE TWO (2) 2" EMT CONDUITS THROUGH FLOOR TO CEILING SPACE BELOW AND ROUTE CONDUIT PLAN NORTH UNDER CONFERENCE ROOM 16 TO BUILDING MAIN MDF ROOM FOR ROUTING OF FIBER OPTIC CABLES.
9. PROVIDE WIREMOLD STEEL SURFACE RACEWAY 4000 (SR4) WITH IVORY PAINT AND TWO POWER PLATES (WIREMOLD COVER) FOR TWO DUPLEX RECEPTACLES AND DATA PLATE (WIREMOLD COVER) V4047BX WITH BLANK OVER DATA OPENING V4047C-1.
10. INSTALL UNDERCOUNTER GROUND FAULT RECEPTACLE FOR CONNECTION TO HWD-1 (INSTANTANEOUS WATER HEATER).
11. DIRECT CONNECTION JUNCTION BOXES WITH LIQUID TIGHT FLEXIBLE METAL CONDUIT FOR CONNECTION OF POWER CIRCUITS AND DATA CIRCUITS TO MODULE FURNITURE.

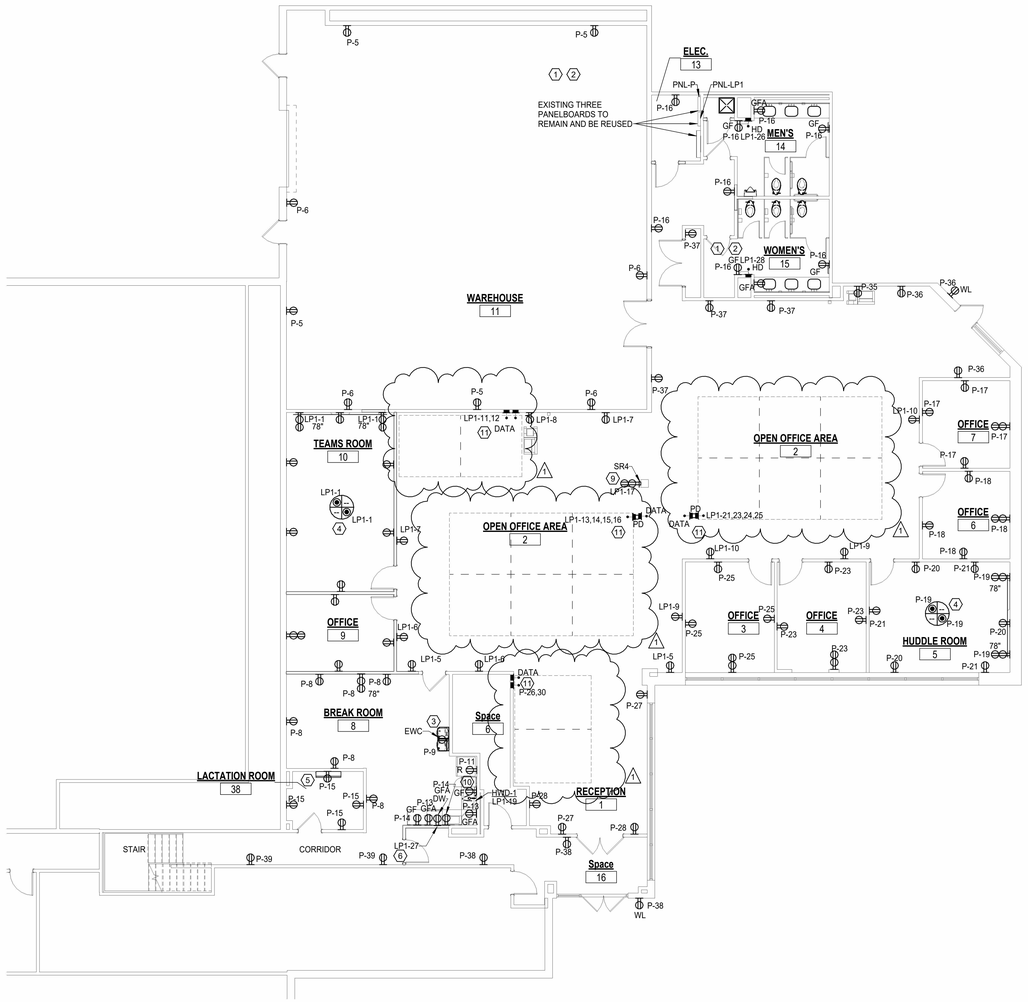

1 / E3.1 FIRST FLOOR ELECTRICAL POWER NEW WORK PLAN
SCALE: 1/8" = 1'-0"

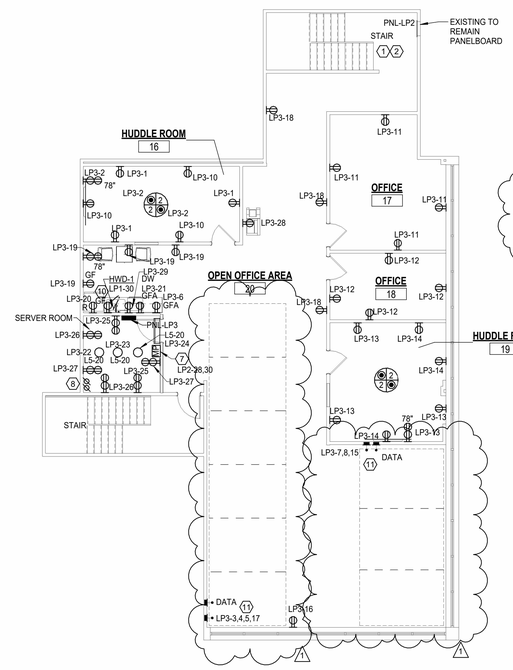

2 / E3.1 SECOND FLOOR ELECTRICAL POWER NEW WORK PLAN
SCALE: 1/8" = 1'-0"

SAMAHA

10521 Rosehaven Street, Suite 200 Fairfax, VA 22030
Phone 703-691-3311 Fax 703-691-3316

ASCENT ENGINEERING GROUP
5228 VALLEYPOINTE PKWY, SUITE 4
ROANOKE, VIRGINIA 24019
(540) 265-4444

D: 2024-0030 C:

LOUDOUN COUNTY PRCS

750 MILLER DR
LEESBURG, VA 20175

BID SET

LOUDOUN COUNTY

NO	REVISION	DATE
1	Addendum 1	08/30/2024

Sheet Title:

ELECTRICAL POWER NEW WORK PLANS

Issue Date: 7/24/2024

Sheet Number:

E3.1

Sheet No. in Set: Total No. Sheets: -

Project Number: XXXXXX
Drawn By: Author
Checked By: Checker