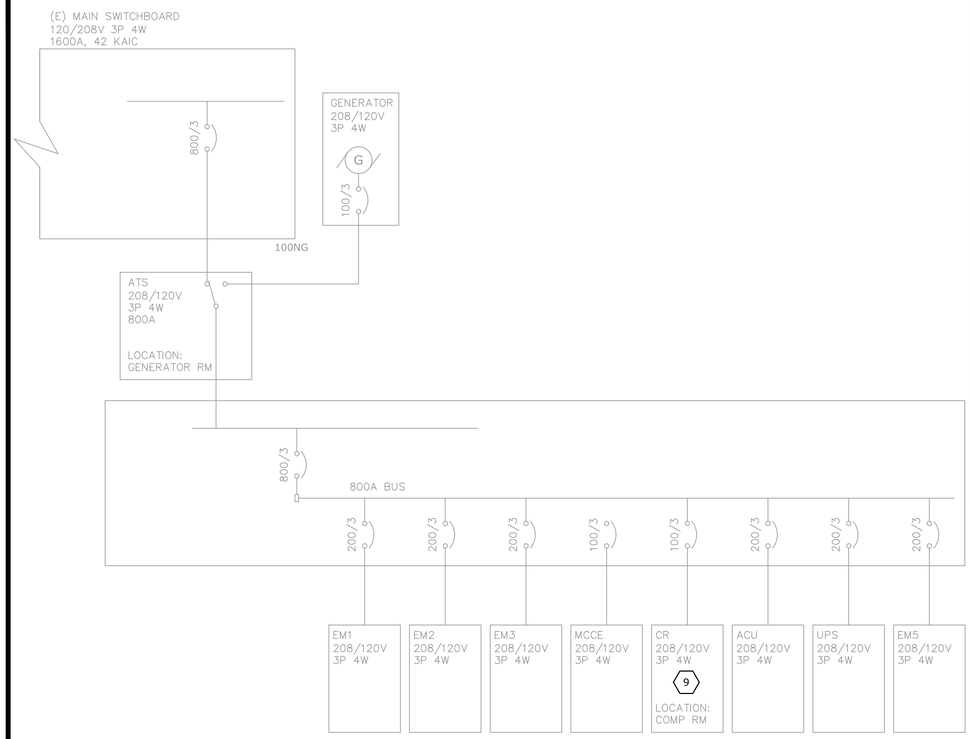

PANEL CR (EXISTING)

MOUNTING: SURFACE | VOLTS: 208/120 | PHASE 3 | WIRE 4 | MAINS: 100
BUS: 100 | LUGS: | AIC:

Ckt	Type	Notes	Description	Bkr	A		B		C		Bkr	Description	Notes	Type	Ckt
1	R		REC UNDER FLOOR (EXISTING)	20/1	1500	1500					20/1	REC ROOM B115 (EXISTING)		R	2
3	R		REC UNDER FLOOR (EXISTING)	20/1			1500	1500			20/1	REC ROOM B115 (EXISTING)		R	4
5	R		REC UNDER FLOOR (EXISTING)	20/1					1500	1500	20/1	REC ROOM B115 (EXISTING)		R	6
7	R		REC UNDER FLOOR (EXISTING)	20/1	1500	1500					20/1	REC ROOM B115 (EXISTING)		R	8
9	R		REC UNDER FLOOR (EXISTING)	20/1			1500	1500			20/1	REC ROOM B114 (EXISTING)		R	10
11	R		REC UNDER FLOOR (EXISTING)	20/1					1500	1500	20/1	REC ROOM B114 (EXISTING)		R	12
13	R		REC UNDER FLOOR (EXISTING)	20/1	1500	1500					20/1	REC ROOM B114 (EXISTING)		R	14
15	R		REC UNDER FLOOR (EXISTING)	20/1			1500	500			20/1	HALONG CONTROL (EXISTING)		R	16
17	R		REC UNDER FLOOR (EXISTING)	20/1					1500	500	20/1	**POWER SUPPLY FOR ACCESS CONTROL**	1	C	18
19	C		DATA BOARD RECEP (EXISTING)	20/1	1500						20/1	**ACCESS CONTROL PANEL**	1	C	20
21			SPARE (EXISTING)	20/1							20/1	SPARE (EXISTING)			22
23			SPARE (EXISTING)	20/1							20/1	SPARE (EXISTING)			24
25			MAIN MCB	100/3		3600					30/1	RACK			26
27			MAIN MCB	-				4200			50/2	BYPASS SWITCH			28
29			MAIN MCB	-						4200	-	-			30
			Phase VA Totals:		14100		12200		12200						

* Notes:
1 **NEW CIRCUIT TO EXISTING BREAKER**

	Connected Load:	Demand Factor:	Demand Load:
Lighting	0	125%	0
Receptacles	24500	1st10kW@100%	17250
Heating	0	100%	0
Largest Motor	0	125%	0
Other Motors	0	100%	0
Kitchen	0	100%	0
Continuous	2000	125%	2500
Non-Continuous	0	100%	0
Totals:	26500 VA	Totals:	19750 VA 54.8 Amps

EXISTING PARTIAL ONE-LINE DIAGRAM

SCALE: 1/4" = 1'-0"

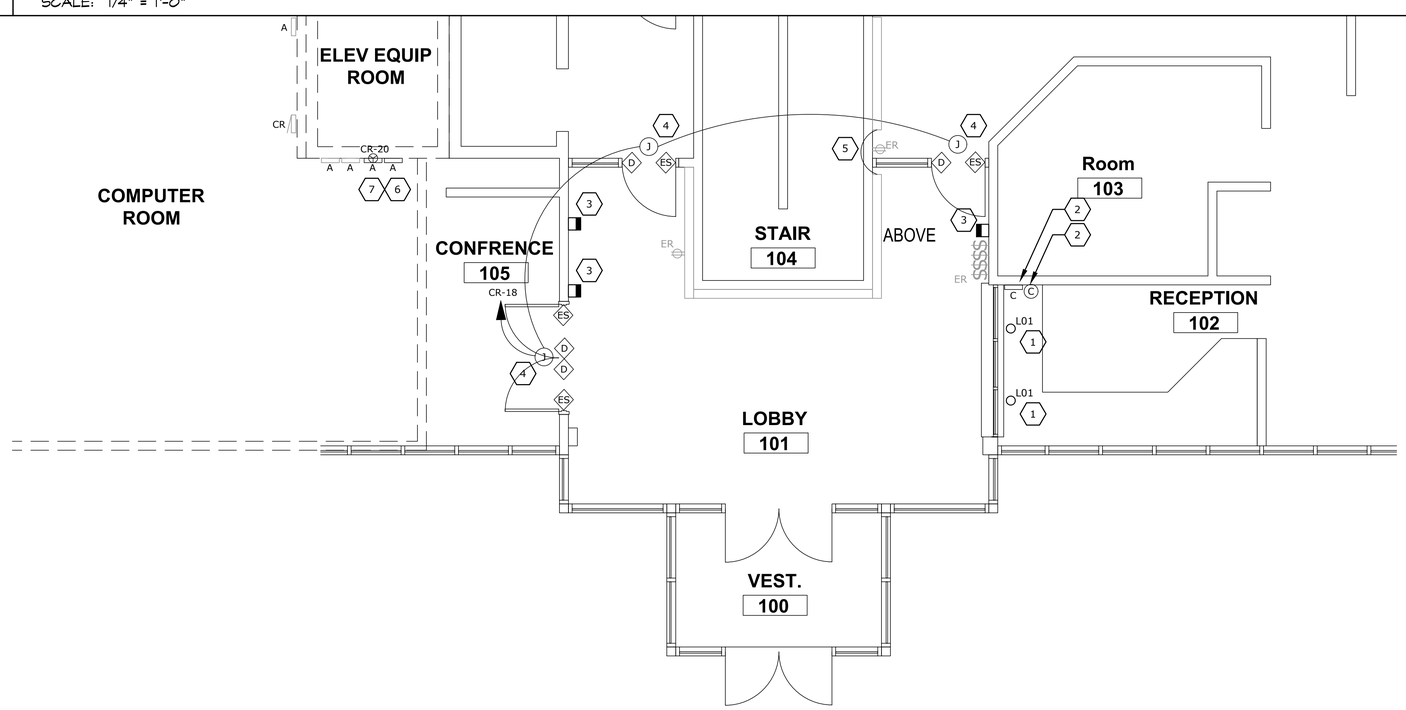

POWER & SYSTEMS PLAN - NEW

SCALE: 1/4" = 1'-0"

GENERAL NOTES

1. SEE REFLECTED CEILING PLANS FROM ARCHITECT FOR EXACT FIXTURE LOCATIONS.
2. SEE ARCHITECTURAL ELEVATIONS FOR MOUNTING HEIGHTS FOR WALL MOUNTED DEVICES.
3. COORDINATE FIXTURE LOCATIONS IN AREAS WITH EXPOSED CEILINGS WITH DUCTWORK AND PIPING. ADJUST LOCATIONS AS REQUIRED FOR ACTUAL FIELD CONDITIONS.
4. SUPPORT LIGHTS IN ACCORDANCE WITH IBC SEISMIC ZONE REQUIREMENTS.
5. PROVIDE CABLE SUPPORTS IN CONJUNCTION WITH MOST CURRENT BICSI STANDARDS AS SUGGESTED PER THE ITS INSTALLATION METHODS MANUAL (ITSIMM). COORDINATE WITH OWNER.
6. PROVIDE AND ALL STRUCTURE CABLING FOR ACCESS CONTROL DEVICES AND MAKE ALL TERMINATIONS. PROVIDE 2-PAIR TWISTED SHIELDED CABLE PER MANUFACTURERS REQUIREMENTS. PROVIDE POWER SUPPLIES FOR ELECTRONIC LOCKS PER MANUFACTURERS RECOMMENDATIONS.

KEY NOTES

1. EXTEND EXISTING LIGHTING CIRCUIT AND CONTROLS TO NEW FIXTURES.
2. EXTEND EXISTING CIRCUIT(S) TO RELOCATED DEVICES AS SHOWN ON PLANS. COORDINATE WITH ARCHITECTURAL FOR INSTALLATION OF SECURITY WINDOW.
3. PROVIDE NEW ACCESS CONTROL DEVICE FOR EXISTING SYSTEM. COORDINATE FINAL LOCATION WITH ARCHITECTURAL PLANS AND DOOR HARDWARE SCHEDULE PRIOR TO ROUGH-IN. PULL NEW CABLES TO EXISTING SYSTEM AS REQUIRED. COORDINATE WITH MANUFACTURER AND IT DEPARTMENT. REFERENCE DETAILS 3/E-801 AND 4/E-801
4. PROVIDE JUNCTION BOX WITH POWER SUPPLY FOR ACCESS CONTROL POWER. EXTEND CIRCUIT FROM PANEL AS INDICATED TO NEW ACCESS CONTROL POWER SUPPLY ABOVE CEILING. REFERENCE DETAIL 3/E-801 FOR MORE INFORMATION.
5. EXTEND EXISTING LIGHTING CIRCUIT AND CONTROLS AS REQUIRED AFTER DOOR FRAME INSTALLATION.
6. PROVIDE NEW ACCESS CONTROL PANEL TO MATCH EXISTING ADJACENT WITH 10% SPARE RELAY CAPACITY FOR FUTURE USE.
7. PROVIDE POWER SUPPLY CONTROLLER FOR ACCESS CONTROL PANEL TO MATCH EXISTING.
8. REPLACE EXISTING LAMPS IN EXISTING WALL WASH LUMINAIRE THE ENTIRE LENGTH AROUND PERIMETER OF THE WALL. REFERENCE SHEET E-101 FOR MORE INFORMATION.
9. EXISTING PANEL TO BE USED AS PART OF SCOPE OF WORK. EXISTING SPARE CIRCUITS TO BE RE-USED ARE ASSOCIATED WITH PANEL.

COPYRIGHT 2019
All rights reserved. Reproduction or translation of any part of this work without written permission of ARCHITECTS WEST INC. is unlawful and subject to criminal prosecution.

PROFESSIONAL ENGINEER LICENSED 16750 STATE OF IDAHO GRADY J. WEISZ
9-25-2019

Architects West
210 E Lakeside Ave
Coeur d'Alene, ID 83814
t. 208.667.9402 f. 208.667.6103
www.architectswest.com

- STRUCTURAL
- MECHANICAL
- ELECTRICAL
  TRINDERA
  1130 W HAYDEN AVE, SUITE #101
  HAYDEN, IDAHO 83835
  208.676.8001

ITD SECURITY LOBBY 19-100
ITD - COEUR D ALENE
600 W. PRAIRIE AVE. BUILDING 1002, COEUR D ALENE, IDAHO 83815

POWER & SYSTEMS PLAN - NEW / EXISTING RISER DIAGRAM

PROJECT NO.	1859
DESIGNED BY	MWM
DRAWN BY	MWM
ISSUE DATE	9-24-2019
PHASE	100% BID SET
CHECKED BY	RL
REVISION	
SHEET NO.	E-201