© GRIMM AND PARKER, P.C. 2014




2 FP-0.1H FIRST FLOOR PLAN- FIRE ZONE 1 & 2
SCALE: 1/32" = 1'-0"




3 FP-0.1H SECOND FLOOR PLAN - FIRE ZONE 3
SCALE: NOT TO SCALE

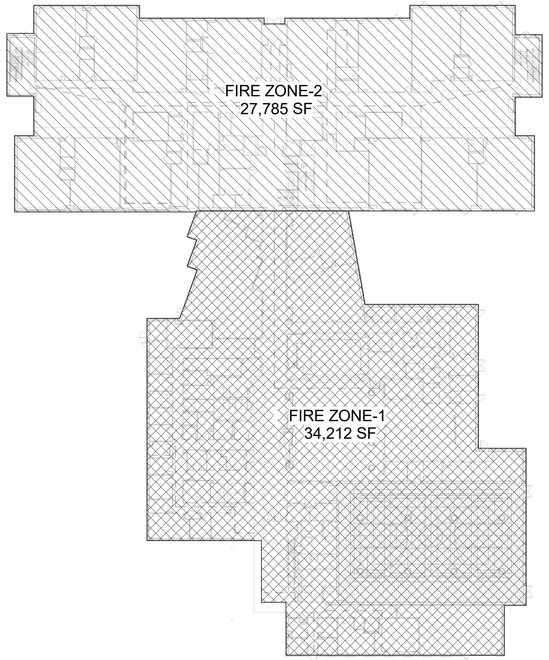


1 FP-0.1H BASEMENT-FIRE ZONE - 2
SCALE: NOT TO SCALE

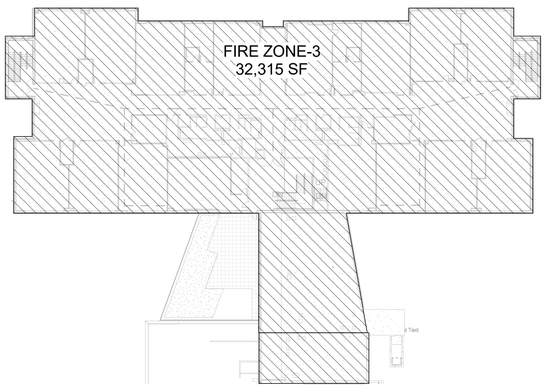


4 FP-0.1H SECOND FLOOR PLAN-PART A - FIRE ZONE 1
SCALE: NOT TO SCALE

## GENERAL FIRE PROTECTION NOTES

1. PROVIDE COMPLETE SPRINKLER PROTECTION THROUGHOUT THE ENTIRE BUILDING IN ACCORDANCE WITH NFPA 13,14, 20, 24. PROVIDE A DENSITY OF WATER APPLICATION IN ACCORDANCE WITH LIGHT HAZARD IN ALL AREAS EXCEPT JANITORS CLOSETS, MECHANICAL JANITORS CLOSETS, MECHANICAL ROOMS, AND STORAGE CLOSETS SHALL BE IN ACCORDANCE WITH ORDINARY HAZARD GROUP 1.
2. SPRINKLER CONTRACTOR SHALL COORDINATE LOCATIONS OF SPRINKLER HEADS WITH LIGHTING FIXTURES, DIFFUSERS, AND CEILING ELEVATIONS FOR PROPER COVERAGE. SPRINKLER CONTRACTOR MUST COORDINATE SPRINKLER PIPING WITH STRUCTURAL ELEMENTS CEILING ELEVATIONS, DUCTWORK, LIGHTS AND PIPING ABOVE CEILING. SPRINKLER HEAD LOCATIONS MUST BE SUBMITTED FOR ARCHITECT APPROVAL PRIOR TO INSTALLATION.
3. OBTAIN ALL NECESSARY PERMITS AND APPROVALS OF GOVERNING AUTHORITIES.
4. IT IS THE RESPONSIBILITY OF THE SPRINKLER CONTRACTOR TO PROVIDE CODE COMPLYING COVERAGE FOR THE NEW BUILDING LAYOUT. THE SPRINKLER CONTRACTOR MUST PROVIDE SHOP DRAWINGS, CALCULATIONS, AND PIPE SIZING, BASED ON THE LAYOUT, FOR APPROVAL BY THE AHJ. DRAWINGS SHALL BE SUBMITTED TO THE ARCHITECT FOR REVIEW AND APPROVAL.
5. SPRINKLER SYSTEM SHALL NOT EXCEED COVERAGE FROM MAX. 225 SQ. FT. PER SPRINKLER FOR LIGHT HAZARD AND 130 SQ. FT. FOR ORDINARY HAZARD.
6. MAX. SPACING BETWEEN TWO SPRINKLER HEADS IS 15 FEET. DO NOT EXCEED NUMBER OF SPRINKLER HEADS ON BRANCH PIPING.
7. PROVIDE THREADED, GROOVED OR WELDED TEES ONLY. NO U-BOLT TEES WILL BE ALLOWED.
8. SLOPE SPRINKLER PIPING BACK TO LOW POINTS FOR FULL DRAINAGE OF THE SYSTEM. LOW POINTS SHALL HAVE ACCESSIBLE DRAIN VALVES AT DESIGNATED LOCATIONS DISCHARGING TO AN ACCEPTABLE DRAIN. EXTEND DRAINS FROM ALL FIRE PROTECTION EQUIPMENT TO APPROPRIATE FLOOR DRAINS OR BUILDING EXTERIOR.
9. EXTEND DRAINS FROM ALL FIRE PROTECTION EQUIPMENT TO APPROPRIATE FLOOR DRAINS OR BUILDING EXTERIOR.
10. PROVIDE COMPLETE SHOP DRAWINGS WITH COMPLETE SPRINKLER HEAD LAYOUTS, PIPE SIZES AND LOCATIONS, AND EQUIPMENT.SHOP DRAWINGS SHALL INCLUDE ALL PRODUCT DATA, FLOOR PLANS, AND HYDRAULIC CALCULATIONS. OBTAIN A CURRENT FLOW TEST VALID WITHIN ONE CALENDAR YEAR OF CONSTRUCTION ON WHICH TO BASE THE DESIGN.
11. SPRINKLER HEADS SHALL BE QUICK RESPONSE. WHERE NO STANDARD EXISTS, SPRINKLER HEADS SHALL BE SEMI-RECESSED POLISHED CHROME PLATED PENDANT FOR FINISHED AREAS, AND UPRIGHT BRASS FOR UNFINISHED AREAS.
12. DO NOT INSTALL PIPING BENEATH AIR HANDLING DEVICES OR THAT INTERFERE WITH ANY TYPE OF ACCESS PANEL. INSTALL PIPING AT LEAST 2" ABOVE LIGHT FIXTURES TO ALLOW FOR FUTURE RELOCATION OF LIGHT FIXTURES WITH OUT REVISION TO PIPING ELEVATIONS.
13. ALL VALVES SHALL BE SUPERVISED WITH TAMPER SWITCHES AND MONITORED AT THE FIRE ALARM PANEL.
14. PROVIDE A CABINET WITH SPARE SPRINKLER HEADS.
15. TEST AND FLUSH THE SYSTEM.
16. PLUMBING CONTRACTOR SHALL PROVIDE ACCESS PANELS WHERE REQUIRED FOR ACCESS TO VALVES IN CEILINGS AND WALLS.

## ABBREVIATIONS

| | |
|---|---|
| ABV | ABOVE |
| AD | AREA DRAIN |
| ADA | AMERICAN DISABILITY ACT |
| AFF | ABOVE FINISHED FLOOR |
| AP | ACCESS PANEL |
| ARCH | ARCHITECTURAL |
| ASME | AMERICAN SOCIETY OF MECHANICAL ENGINEERS |
| ASPE | AMERICAN SOCIETY OF PLUMBING ENGINEERS |
| ASSE | AMERICAN SOCIETY OF SANITARY ENGINEERS |
| BLDG | BUILDING |
| BLW | BELOW |
| BTU | BRITISH THERMAL UNIT |
| BTUH | BRITISH THERMAL UNIT PER HOUR |
| BV | BACKWATER VALVE |
| CFM | CUBIC FEET PER MINUTE |
| CLG | CEILING |
| CO | CLEANOUTS |
| CONT | CONTINUATION |
| CW | COLD WATER |
| DCWASA | D.C. WATER AND SEWER AUTHORITY |
| DFU | DRAINAGE FIXTURE UNIT |
| DIA | DIAMETER |
| DN | DOWN |
| DWG | DRAWING |
| DWH | DOMESTIC WATER HEATER |
| E | EXISTING |
| EA | EACH |
| EQUIP | EQUIPMENT |
| ET | EXPANSION TANK |
| ETR | EXISTING TO REMAIN |
| F | WATER FILTER |
| FD | FLOOR DRAIN |
| FDC | FIRE DEPARTMENT CONNECTION |
| FPT | FIRE PUMP TEST HEADER |
| FHC | FIRE HOSE CABINET |
| FL | FLOOR |
| FS | FLOW SWITCH |
| FT | FEET |
| GAL | GALLON |
| GCO | GRADE CLEANOUTS |
| GPM | GALLONS PER MINUTE |
| HDPE | HIGH DENSITY POLYETHYLENE |
| HP | HORSE POWER |
| HW | HOT WATER SUPPLY |
| HWR | HOT WATER RETURN |
| HWSH | HOT WATER STORAGE/HEATER |
| IN | INCH |
| INV | INVERT |
| KW | KILOWATT |
| MAX | MAXIMUM |
| MBH | THOUSAND BTU PER HOUR |
| MECH | MECHANICAL |
| MFR | MANUFACTURER |
| MIN | MINIMUM |
| MTD | MOUNTED |
| N | NEW |
| NIC | NOT IN CONTRACT |
| NO. | NUMBER |
| P | PUMP |
| PDI | PLUMBING DRAIN INSTITUTE |
| PH | PHASE (ELECTRICAL) |
| PRV | PRESSURE REDUCING VALVE |
| PSI | POUNDS PER SQUARE INCH |
| RD | ROOF DRAIN |
| REF | REFRIGERATOR |
| RPM | REVOLUTIONS PER MINUTE |
| SAN | SANITARY/WASTE PIPE |
| SF | SQUARE FEET |
| SFU | SUPPLY FIXTURE UNIT |
| SS | STAINLESS STEEL |
| ST | STORM WATER |
| STRUC | STRUCTURAL |
| TDA | TEST AND DRAIN ASSEMBLY |
| TEMP | TEMPERATURE |
| TMV | THERMOSTATIC MIXING VALVE |
| TP | TRAP PRIMER TUBE |
| TW | TEMPERED WATER |
| TYP | TYPICAL |
| UR | URINAL |
| VTR | VENT THRU ROOF |
| W | WATT |
| WC | WATER CLOSET |
| WCO | WALL CLEANOUTS |
| WM | WATER METER |
| WTR | WATER |
| W/ | WITH |
| W/O | WITHOUT |

NOTE:
ALL ABBREVIATIONS MAY NOT APPEAR ON THE DRAWINGS.

## FIRE PROTECTION SYMBOLS

### PIPE FITTINGS

- REDUCER/INCREASER
- CAPPED CONNECTION
- PIPE UNION
- ELBOW TURNED UP
- ELBOW TURNED DOWN
- TEE DOWN
- SHUT-OFF VALVE IN RISER

### DRAINS

- X" AD — AREA DRAIN
- X" FD — FLOOR DRAIN
- X" OSD — OPEN SITE DRAIN

### ANNOTATIONS

- F / 1 — FIRE RISER DESIGNATION
- 1 — REVISION NUMBER
- POINT OF DEMOLITION
- POINT OF CONNECTION

### DETAIL ANNOTATIONS

- 2 / P2.01 — DETAIL NUMBER / WHERE THE DETAIL IS DRAWN
- 2 / P1.01 P2.01 — DETAIL NUMBER / WHERE THE DETAIL IS DRAWN / WHERE THE DETAIL REFERENCED

### PIPE REPRESENTATION

- FIRE PROTECTION PIPING (X" F)
- ALTERNATE PIPE RESPRESENTATION

### PIPE VALVES AND ACCESSORIES

- OUTSIDE SCREW & YOKE VALVE
- SUPERVISORY VALVE (TAMPER SWITCH)
- REDUCED PRESSURE ZONE BACKFLOW PREVENTER (ASSE1013)
- BALL VALVE
- CHECK VALVE
- DOUBLE CHECK VALVE BACKFLOW PREVENTER (ASSE 1015, 1048)
- SOLENOID VALVE
- GATE VALVE
- PRESSURE REDUCING VALVE
- THERMOSTATIC MIXING VALVE
- PLUG VALVE
- BALANCING VALVE
- DRY PIPE VALVE
- BACKF LOW PREVENTER (ASSE 1024)
- PUMP
- WATER HAMMER ARRESTOR W/DESIGNATION
- PRESSURE GAUGE
- THERMOMETER GAUGE
- AQUASTAT VALVE
- STRAINER
- FLOW SWITCH
- CONTROL VALVE, PRESSURE GAUGE, WATER FLOW SWITCH AND INSPECTORS TEST/DRAIN ASSEMBLY
- FIRE PUMP TEST CONNECTION
- PENDENT SPRINKLER HEAD
- UPRIGHT SPRINKLER HEAD
- ATTIC BACK-TO BACK SPRINKLER HEAD
- ATTIC SINGLE DIRECTIONAL SPRINKLER HEAD
- ATTIC HIP SPRINKLER HEAD
- FIRE HOSE CONNECTION (IN RISER) FIRE PIPING
- FIRE HOSE CONNECTION (IN PLAN)
- SIAMESE FIRE DEPARTMENT CONNECTION
- FREE STANDING SIAMESE FIRE DEPARTMENT CONNECTION
- DIRT LEG

NOTE: ALL SYMBOLS MAY NOT APPEAR ON THE DRAWINGS.

FIRE PROTECTION - HOLABIRD SHEET LIST

| SHEET | DRAWING | TITLE |
|---|---|---|
| 1 | FP-0.1H | FIRE PROTECTION GENERAL NOTES, SYMBOLS & ABBREVATIONS |
| 2 | FP-1.1H | FIRE PROTECTION PARTIAL FIRST FLOOR PLAN – AREA A |
| 3 | FP-1.2 | FIRE PROTECTION PARTIAL FIRST FLOOR PLAN – AREA C |
| 4 | FP-1.3 | FIRE PROTECTION PARTIAL SECOND FLOOR PLAN – AREA C |
| 5 | FP-5.1H | FIRE PROTECTION RISER DIAGRAM |
| 6 | FP-6.1H | FIRE PROTECTION SCHEDULES |
| 7 | FP-7.1 | FIRE PROTECTION DETAILS |

SETTY
ONE SOUTH STREET, SUITE 1110
BALTIMORE, MARYLAND 21202
TEL 667-329-5035
WATER FOOTPRINT ENERGY MANAGEMENT
ENERGY MANAGEMENT SERVICES • DESIGN BUILD SERVICES
CONSULTING • ENGINEERING • PROJECT MANAGEMENT
DISTRICT OF COLUMBIA • MARYLAND
www.SETTY.com
PROJECT NUMBER: SA2017-1 # # # #

11720 Beltsville Drive
Suite 600
Calverton, MD 20705
Tel: 301.595.1000
www.grimmandparker.com

GRIMM AND PARKER

GP# 21553

FIRE PROTECTION GENERAL NOTES, SYMBOLS & ABBREVATIONS
HOLABIRD ACADEMY PK-8
CITY OF BALTIMORE, MARYLAND

| DATE | DESCRIPTION |
|---|---|

**FP-0.1H**

03/13/2017
BID SET

© GRIMM AND PARKER, P.C. 2014