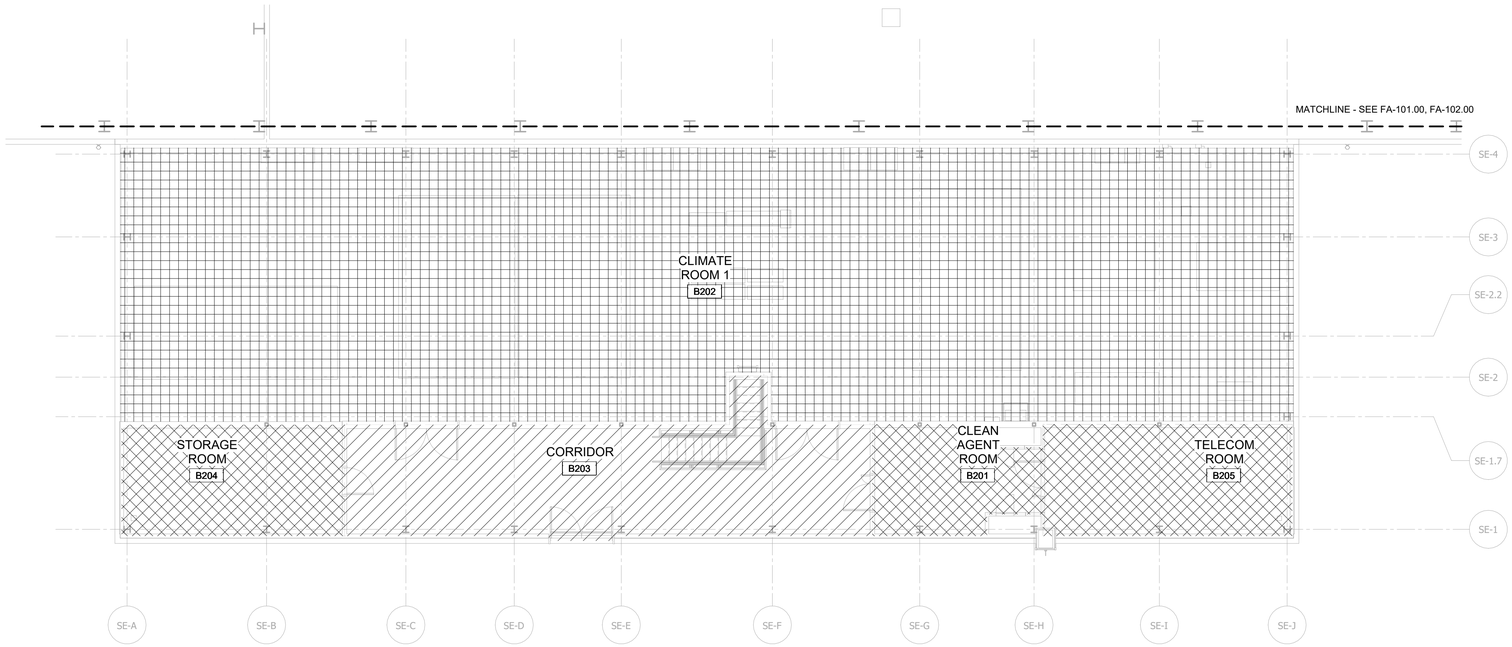

1 FA-105.00 AUDIBILITY PLAN - SECOND FLOOR
1/8" = 1'-0"

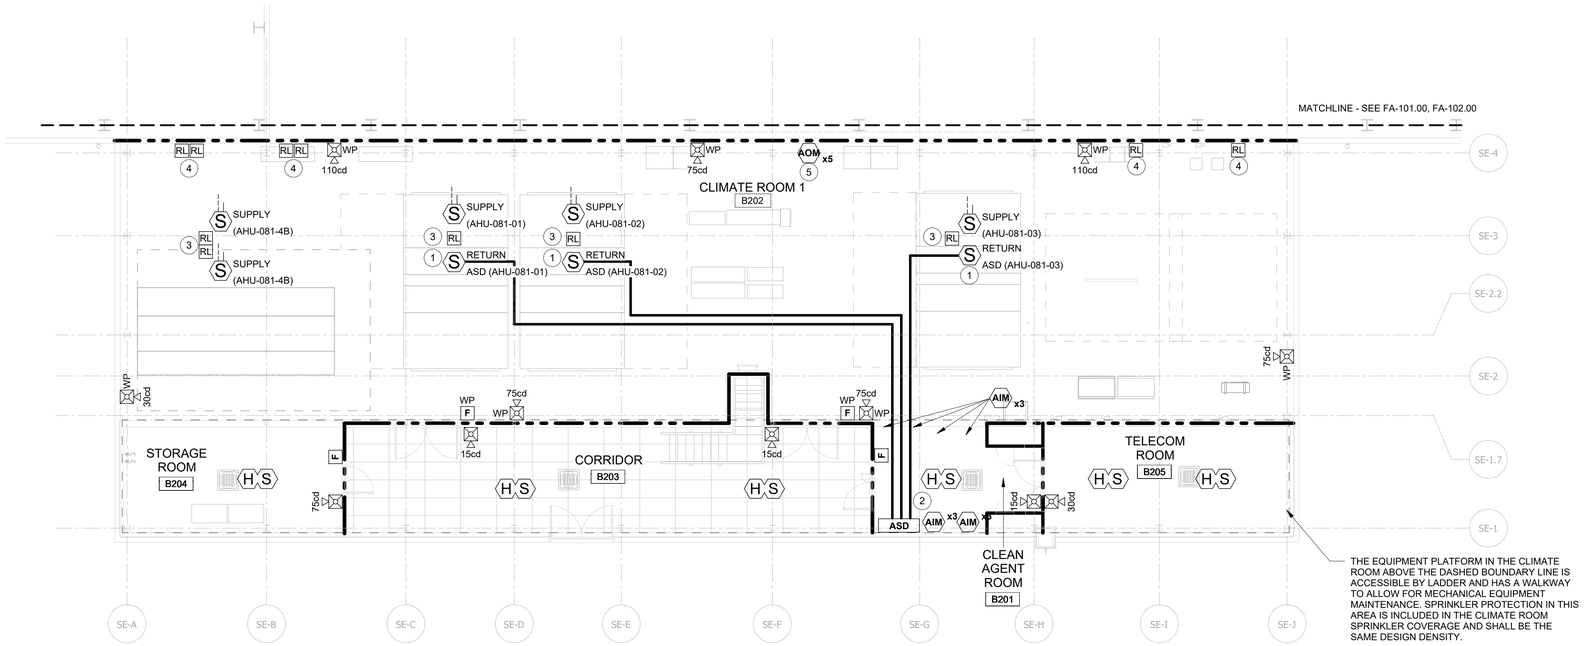

THE EQUIPMENT PLATFORM IN THE CLIMATE ROOM ABOVE THE DASHED BOUNDARY LINE IS ACCESSIBLE BY LADDER AND HAS A WALKWAY TO ALLOW FOR MECHANICAL EQUIPMENT MAINTENANCE. SPRINKLER PROTECTION IN THIS AREA IS INCLUDED IN THE CLIMATE ROOM SPRINKLER COVERAGE AND SHALL BE THE SAME DESIGN DENSITY.

2 FA-105.00 FIRE ALARM PLAN - SECOND FLOOR
1/8" = 1'-0"

12/20/2022 4:20:35 PM

RATED WALL LEGEND	
	2 HOUR FIRE BARRIER
NOTE: RATED WALLS ARE REFERENCED FROM ARCHITECTURAL PLANS. INCLUDED IN SEPARATE PERMIT SUBMITTAL.	

AUDIBILITY HATCH LEGEND	
	30dB AMBIENT SPL 45dB EXPECTED SPL
	54dB AMBIENT SPL 69dB EXPECTED SPL
	91dB AMBIENT 106dB EXPECTED SPL

KEYNOTES

1. LOCATE ASPIRATING SMOKE DETECTION SAMPLE PIPING/HEADS IN RETURN DUCT OF VALVE HALL HVAC UNIT DOWNSTREAM OF COMMON RETURN DUCT (SEE MECHANICAL DRAWINGS FOR DETAILS INCLUDED INSEPARATE PERMIT SUBMITTAL). PIPING SHALL BE RUN BACK TO VESDA CONTROL UNIT LOCATED IN THE SERVICE BUILDING CLEAN AGENT ROOM B201.
2. SAMPLING PIPE ROUTING SHOWN IS SCHEMATIC IN NATURE. ACTUAL PIPE ROUTING AND SAMPLE POINTS SHALL BE DETERMINED BASED ON ACTUAL EQUIPMENT LOCATIONS UNIQUE TO EACH CONVERTER HALL. FINAL CONFIGURATION SHALL BE VERIFIED USING MANUFACTURER-SPECIFIC SOFTWARE TO CONFIRM TRANSPORT TIME AND DETECTION THRESHOLD PERFORMANCE CRITERIA.
3. RELAY MODULE FOR HVAC UNIT SHUTDOWN. COORDINATE LOCATION WITH MECHANICAL DRAWINGS INCLUDED IN SEPARATE PERMIT SUBMITTAL.
4. RELAY MODULE FOR FIRE/SMOKE DAMPER CLOSURE. COORDINATE LOCATION WITH MECHANICAL DRAWINGS INCLUDED IN SEPARATE PERMIT SUBMITTAL.
5. POST-FIRE SMOKE PURGE ACTIVATION. SEE INPUT/OUTPUT MATRIX.

ISSUED FOR PERMIT

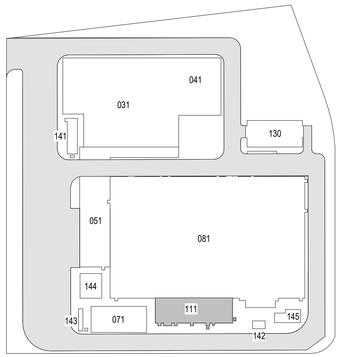

KEY PLAN
N.T.S.

PLAN NORTH

Poole Fire Protection
19910 West 161st Street
Olathe, KS 66062
913.829.8000 office ▲ 913.829.8080 fax

19910 W. 161st STREET
OLATHE, KS. 66062

SOWINSKI SULLIVAN
ARCHITECTURE • ENGINEERING

25 Mohawk Avenue
Sparta, NJ 07871

CONFIDENTIAL

THESE DRAWINGS ARE CONFIDENTIAL IN NATURE. ANY MISUSE OR UNAUTHORIZED DISTRIBUTION OF THE DRAWINGS CONTAINED HEREIN WILL BE A VIOLATION OF THIS CONFIDENTIALITY REQUIREMENT AND SUBJECT THE VIOLATOR TO LIABILITY. REVIEW OF THESE MATERIALS BY RECEIPT SHALL CONSTITUTE ACCEPTANCE OF THESE TERMS AND THE TERMS OF ANY UNDERLYING CONFIDENTIALITY AGREEMENT WE MAY HAVE EXCLUDED IN OBTAINING THIS INFORMATION FROM A THIRD PARTY. IF THE RECIPIENT IS NOT IN AGREEMENT WITH THE OBLIGATION OF CONFIDENTIALITY THEN THE DRAWINGS SHALL BE RETURNED TO THE ORIGINATOR.

REV	DESCRIPTION	DRW BY	CHK BY	DATE
B	FINAL SUBMISSION	SAB	AWP	12/12/2022
A	INTERIM SUBMISSION	SAB	AWP	09/13/2022

Kiewit
470 Chestnut Ridge Rd # 2,
Woodcliff Lake, NJ 07677

Hitachi Energy
901 Main Campus Drive
Raleigh, North Carolina 27606

PROJECT

CHPE
Champlain Hudson Power Express

Astoria HVDC Converter Station

31-45 20th Avenue, Astoria, Queens NY 11105
Block #850 - Lot #310 - BIN #4624437

TRUE NORTH
PLAN NORTH

1' 0 4' 8' 16'

SERVICE BUILDING - FIRE ALARM PLAN

STATE OF NEW JERSEY
ANTHONY W. PARKER
102980
LICENSED PROFESSIONAL ENGINEER
12/12/22

DATE	12/12/2022
PROJECT NO	105121
DRAWING BY	S. BRINKMEYER
CHECKED BY	A. POOLE
DRAWING NO	FA-105.00
CADD FILE N0 Autodesk Docs://CHPE Astoria/CHA-KIE-111-00-M3-FP-001.rvt	11 of 18