© GRIMM AND PARKER, P.C. 2014

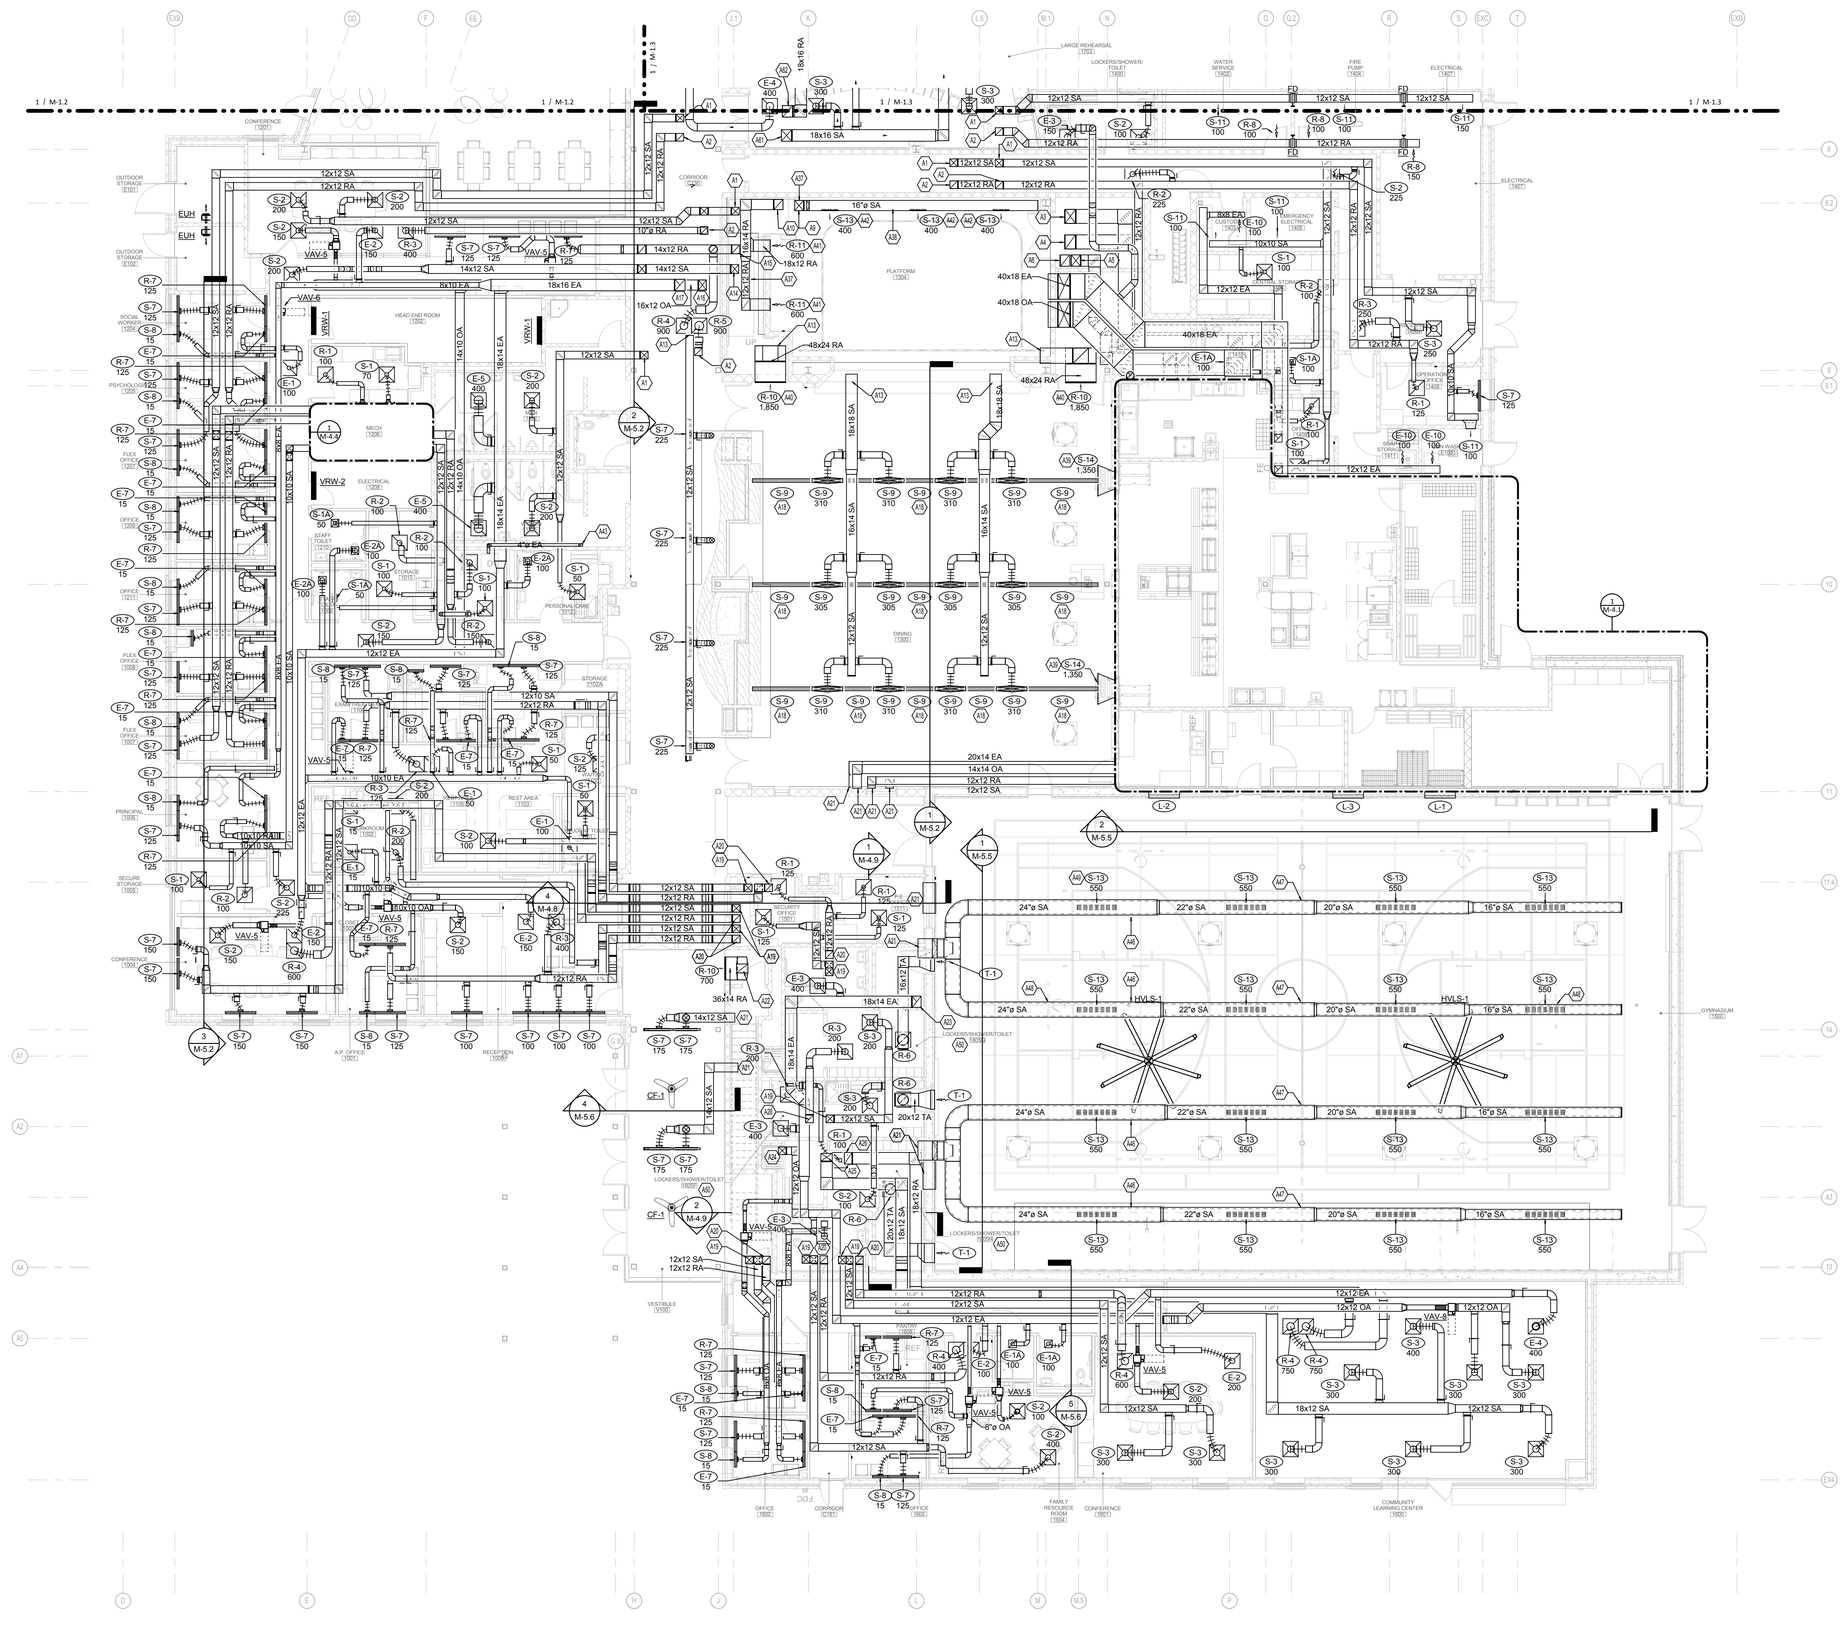

1 FIRST FLOOR - AREA A - AIR DISTRIBUTION
SCALE: 1/8" = 1'-0"
0 2' 4' 8' 16' 24' 32'

GENERAL AIR DISTRIBUTION NOTES

A	REFER TO R,G,D RUNOUT SCHEDULE FOR R,G,D DUCT SIZE.
B	REFER TO TYPICAL BRANCH DUCT SUPPLY/OUTSIDE/RETURN/EXHAUST AIR DETAIL.
C	REFER TO TRANSFER AIR GRILLE DETAIL.
D	COORDINATE REGISTERS, GRILLES, AND DIFFUSERS WITH REFLECTED CEILING PLANS AND LIGHTING PLANS.
E	REFER TO CAV/VAV BOX DETAIL.
F	REFER TO AIR TERMINAL UNIT SCHEDULE FOR ALL RUNOUT SIZED OF VAV AND CAV BOXES.
G	REFER TO REFLECTED CEILING PLANS. PROVIDE 12"x12" ACCESS PANEL PREPARED FOR PAINTING AND PAINTED IN ACCORDANCE WITH ARCHITECTURAL REQUIREMENTS. PROVIDE ACCESS PANELS FOR DAMPERS WHERE INDICATED ABOVE GYPSUM CEILINGS IN AREAS SUCH AS RESTROOMS, LOCKER ROOMS, CUSTODIAL AREAS, ETC.

TAGGED NOTES

A1	12"x12" SA UP TO MECHANICAL ROOM - CENTRAL 2101. REFER TO SHEET M-4.0 MECHANICAL PENTHOUSE.
A2	12"x12" RA UP TO MECHANICAL ROOM - CENTRAL 2101. REFER TO SHEET M-4.0 MECHANICAL PENTHOUSE.
A3	22"x16" SA UP TO MECHANICAL ROOM - CENTRAL 2101. REFER TO SHEET M-4.0 MECHANICAL PENTHOUSE.
A4	22"x16" RA UP TO MECHANICAL ROOM - CENTRAL 2101. REFER TO SHEET M-4.0 MECHANICAL PENTHOUSE.
A5	18"x14" SA UP TO MECHANICAL ROOM - CENTRAL 2101. REFER TO SHEET M-4.0 MECHANICAL PENTHOUSE.
A6	18"x14" RA UP TO MECHANICAL ROOM - CENTRAL 2101. REFER TO SHEET M-4.0 MECHANICAL PENTHOUSE.
A9	16"x14" SA UP TO MECHANICAL ROOM - CENTRAL 2101. REFER TO SHEET M-4.0 MECHANICAL PENTHOUSE.
A10	16"x14" RA UP TO MECHANICAL ROOM - CENTRAL 2101. REFER TO SHEET M-4.0 MECHANICAL PENTHOUSE.
A13	REFER TO SHEET M-4.0 MECHANICAL PENTHOUSE FOR DUCT CONTINUATION. DUCT IS SERVED BY UNIT IN MECHANICAL ROOM - CENTRAL 2101.
A14	14"x12" SA UP TO MECHANICAL ROOM - CENTRAL 2101. REFER TO SHEET M-4.0 MECHANICAL PENTHOUSE.
A15	14"x12" RA UP TO MECHANICAL ROOM - CENTRAL 2101. REFER TO SHEET M-4.0 MECHANICAL PENTHOUSE.
A16	16"x12" OA UP TO MECHANICAL ROOM - CENTRAL 2101. REFER TO SHEET M-4.0 MECHANICAL PENTHOUSE.
A17	18"x16" EA UP TO MECHANICAL ROOM - CENTRAL 2101. REFER TO SHEET M-4.0 MECHANICAL PENTHOUSE.
A18	PROVIDE DIFFUSER WITH BLANK OFF.
A19	12"X12" SA UP TO MECHANICAL ROOM - GYMNASIUM. REFER TO SHEET M-4.8 GYM MECHANICAL ROOM.
A20	12"X12" RA UP TO MECHANICAL ROOM - GYMNASIUM. REFER TO SHEET M-4.8 GYM MECHANICAL ROOM.
A21	REFER TO SHEET M-4.8 GYM MECHANICAL ROOM FOR DUCT CONTINUATION.
A22	14"X18" RA UP TO MECHANICAL ROOM - GYMNASIUM. REFER TO SHEET M-4.8 GYM MECHANICAL ROOM.
A23	18"X14" EA DUCT UP TO MECHANICAL ROOM - GYMNASIUM. REFER TO SHEET M-4.8 GYM MECHANICAL ROOM FOR DUCT CONTINUATION.
A24	12"X12" OA DUCT UP TO MECHANICAL ROOM - GYMNASIUM. REFER TO SHEET M-4.8 GYM MECHANICAL ROOM FOR DUCT CONTINUATION.
A25	18"X12" SA DUCT UP TO MECHANICAL ROOM - GYMNASIUM. REFER TO SHEET M-4.8 GYM MECHANICAL ROOM.
A26	18"X12" RA DUCT UP TO MECHANICAL ROOM - GYMNASIUM. REFER TO SHEET M-4.8 GYM MECHANICAL ROOM.
A37	ALL EXPOSED RECTANGULAR DUCTWORK SHALL BE INSULATED AND PAINTED IN ACCORDANCE WITH SPECIFICATIONS. COLOR TO BE SELECTED BY ARCHITECT.
A38	ROUND DUCTWORK IS EXPOSED AND SHALL BE DOUBLE WALL DUCTWORK PREPARED FOR PAINTING AND PAINTED IN ACCORDANCE TO ARCHITECTURAL REQUIREMENTS.
A39	SUPPLY DIFFUSER SHALL BE LOCATED 14'-0" FROM FF TO BOTTOM OF DIFFUSER.
A40	RETURN GRILLE SHALL BE LOCATED 9'-6" FROM BOTTOM OF GRILLE TO FF.
A41	RETURN GRILLE SHALL BE LOCATED 13'-10" FROM BOTTOM OF GRILLE TO FF OF PLATFORM AREA.
A42	SUPPLY DIFFUSER SHALL BE LOCATED 14'-0" FROM FF OF PLATFORM AREA TO BOTTOM OF DIFFUSER.
A43	4" ROUND DRYER EXHAUST UP THROUGH ROOF. PROVIDE ROOF CAP WITH BIRD SCREEN 12" ABOVE ROOF. ROUTE DRYER EXHAUST TO LAUNDRY 1011.
A46	SUPPLY DUCTWORK IN GYMNASIUM 1500 SHALL BE DOUBLE WALL DUCTWORK. DUCTWORK SHALL BE PREPARED FOR PAINTING AND PAINTED IN ACCORDANCE WITH ARCHITECTURAL REQUIREMENTS.
A47	COORDINATE SUPPLY DUCTWORK WITH GYMNASIUM CURTAIN.
A48	SUPPLY DUCTWORK IS ROUTED THROUGH STRUCTURE ABOVE BASKETBALL GOAL. COORDINATE SUPPORTING STRUCTURE AND BRACING FOR BASKETBALL GOALS WITH DUCTWORK. COORDINATE FOLDING HEIGHT WITH DUCTWORK.
A49	GYMNASIUM SUPPLY DIFFUSER IS A CURVED DIFFUSER THAT MATCHES THE RADIUS OF THE SUPPLY DUCT. ALL S-13 DIFFUSER IN GYMNASIUM 1500 SHALL BE MOUNTED CENTERED ON THE BOTTOM OF THE DUCT. TYPICAL.
A50	LOCKERS/SHOWER/TOILET 1805G, 1805F, AND 1805H CONTAIN GYPSUM CEILINGS. PROVIDE 12"x12" ACCESS PANELS FOR ALL HVAC BALANCING DAMPERS IN THESE LOCATIONS. PREPARE ACCESS PANELS FOR PAINTING AND PAINT IN ACCORDANCE WITH ARCHITECTURAL REQUIREMENTS.
A52	MOUNT R,G,D 10'-8" FROM FF. MATCH BLOCK COURSING.
A61	18"x16" SA UP TO DHP-64 IN MECHANICAL ROOM - CENTRAL 2101. REFER TO SHEET M4.0 FOR CONTINUATION.
A62	18"x16" RA UP TO DHP-64 IN MECHANICAL ROOM - CENTRAL 2101, REFER TO SHEET M4.0 FOR CONTINUATION.

R, G, D RUNOUT SCHEDULE

MARK	BRANCH DUCT SIZE
E-1	6" DIA
E-1A	6" DIA
E-2	8" DIA
E-2A	10" DIA
E-3	10" DIA
E-4	12" DIA
E-5	14" DIA
E-7	SEE PLANS
E-9	SEE PLANS
E-10	48"x12"
R-1	6" DIA
R-2	8" DIA
R-3	10" DIA
R-4	12" DIA
R-5	14" DIA
R-6	16" DIA
R-7	SEE PLANS
R-8	12"x8"
R-9	SEE PLANS
R-10	SEE PLANS
R-11	18"x12"
R-13	SEE PLANS
R-14	SEE PLANS
S-1	6" DIA
S-1A	6" DIA
S-2	8" DIA
S-3	10" DIA
S-4	12" DIA
S-7	SEE PLANS
S-8	SEE PLANS
S-9	48"x5.25"
S-10	SEE PLANS
S-11	-
S-12	-
S-13	-
S-14	SEE PLANS
T-1	SEE PLANS



KEYPLAN

N

2429 Members Way
Lexington, Ky 40504
Tel: 859.253.0892
http://www.cmtaegs.com/

11720 Beltsville Drive
Suite 600
Calverton, MD 20705
Tel: 301.595.1000
www.grimmandparker.com

G+P GRIMM AND PARKER

GP# 21553

AIR DISTRIBUTION - FIRST FLOOR AREA A

HOLABIRD ACADEMY PK-8
CITY OF BALTIMORE, MARYLAND

DATE	DESCRIPTION

M-1.1

03/13/2017
BID SET

© GRIMM AND PARKER, P.C. 2014