SHEET NOTE

1. RELOCATE EXISTING AIR TERMINALS IN THE NEW CEILING.
2. RECONNECT AIR TERMINAL TO DUCT RUNOUT WITH FLEX DUCT. MATCH FLEX DUCT SIZE TO DIFFUSER INLET SIZE AND DUCT RUNOUT.
3. REFRIGERANT SUCTION AND OR REFRIGERANT LIQUID. ROUTE UP TO AND OR FROM ROOF. ROUTE TO AND OR FROM CONDENSING UNIT ON ROOF. REFRIGERANT PIPING IS TO BE SIZED ACCORDING TO MANUFACTURER'S INSTALLATION INSTRUCTIONS.
4. CONDENSATE DRAIN ROUTED UP TO ROOF. TERMINATE ON ROOF WITH 45° ELBOW TURNED DOWN, MIN 6" ABOVE ROOF LEVEL. COVER END WITH INSECT SCREEN.
5. CAP OPEN END DUCT WITH RECTANGULAR DUCT CAP. MATCH SIZE TO DUCT TRANSITION FITTING.

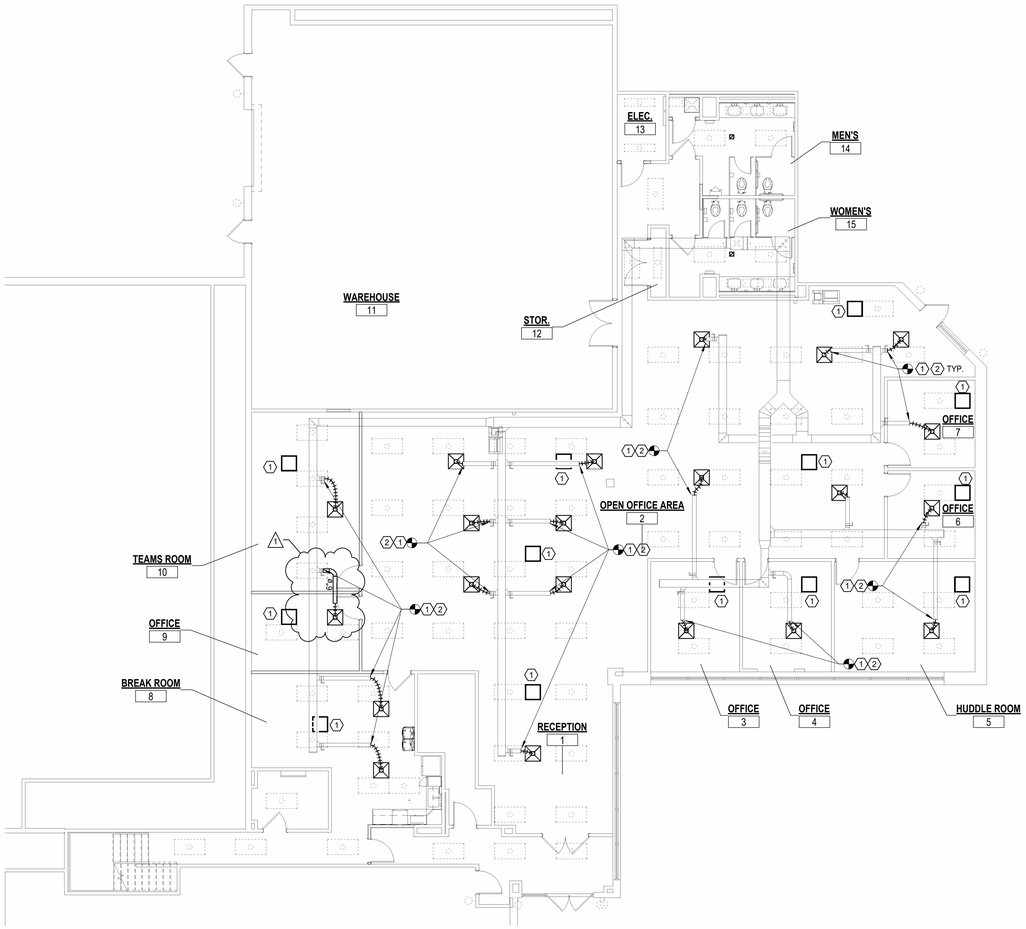

1 / M1.1 FIRST FLOOR - MECHANICAL DUCTWORK PLAN - NEW CONSTRUCTION
SCALE: 1/8" = 1'-0"

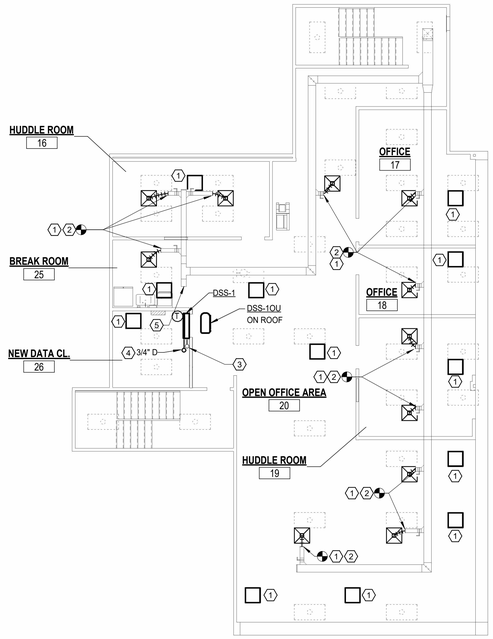

2 / M1.1 SECOND FLOOR - MECHANICAL DUCTWORK PLAN - NEW CONSTRUCTION
SCALE: 1/8" = 1'-0"

SAMAHA

10521 Rosehaven Street, Suite 200 Fairfax, VA 22030
Phone 703-691-3311 Fax 703-691-3316

ASCENT ENGINEERING GROUP
5228 VALLEYPOINTE PKWY, SUITE 4
ROANOKE, VIRGINIA 24019
(540) 265-4444
D: 2024-0030 C:

LOUDOUN COUNTY PRCS

750 MILLER DR
LEESBURG, VA 20175

BID SET

LOUDOUN COUNTY

NO	REVISION	DATE
1	Addendum 1	08/30/2024

Sheet Title:

MECHANICAL DUCTWORK PLAN

Issue Date: 7/24/2024

Sheet Number:

M1.1

Sheet No. in Set: Total No. Sheets: -

Project Number: XXXXXX
Drawn By: CMM
Checked By: GTG