© GRIMM AND PARKER, P.C. 2014

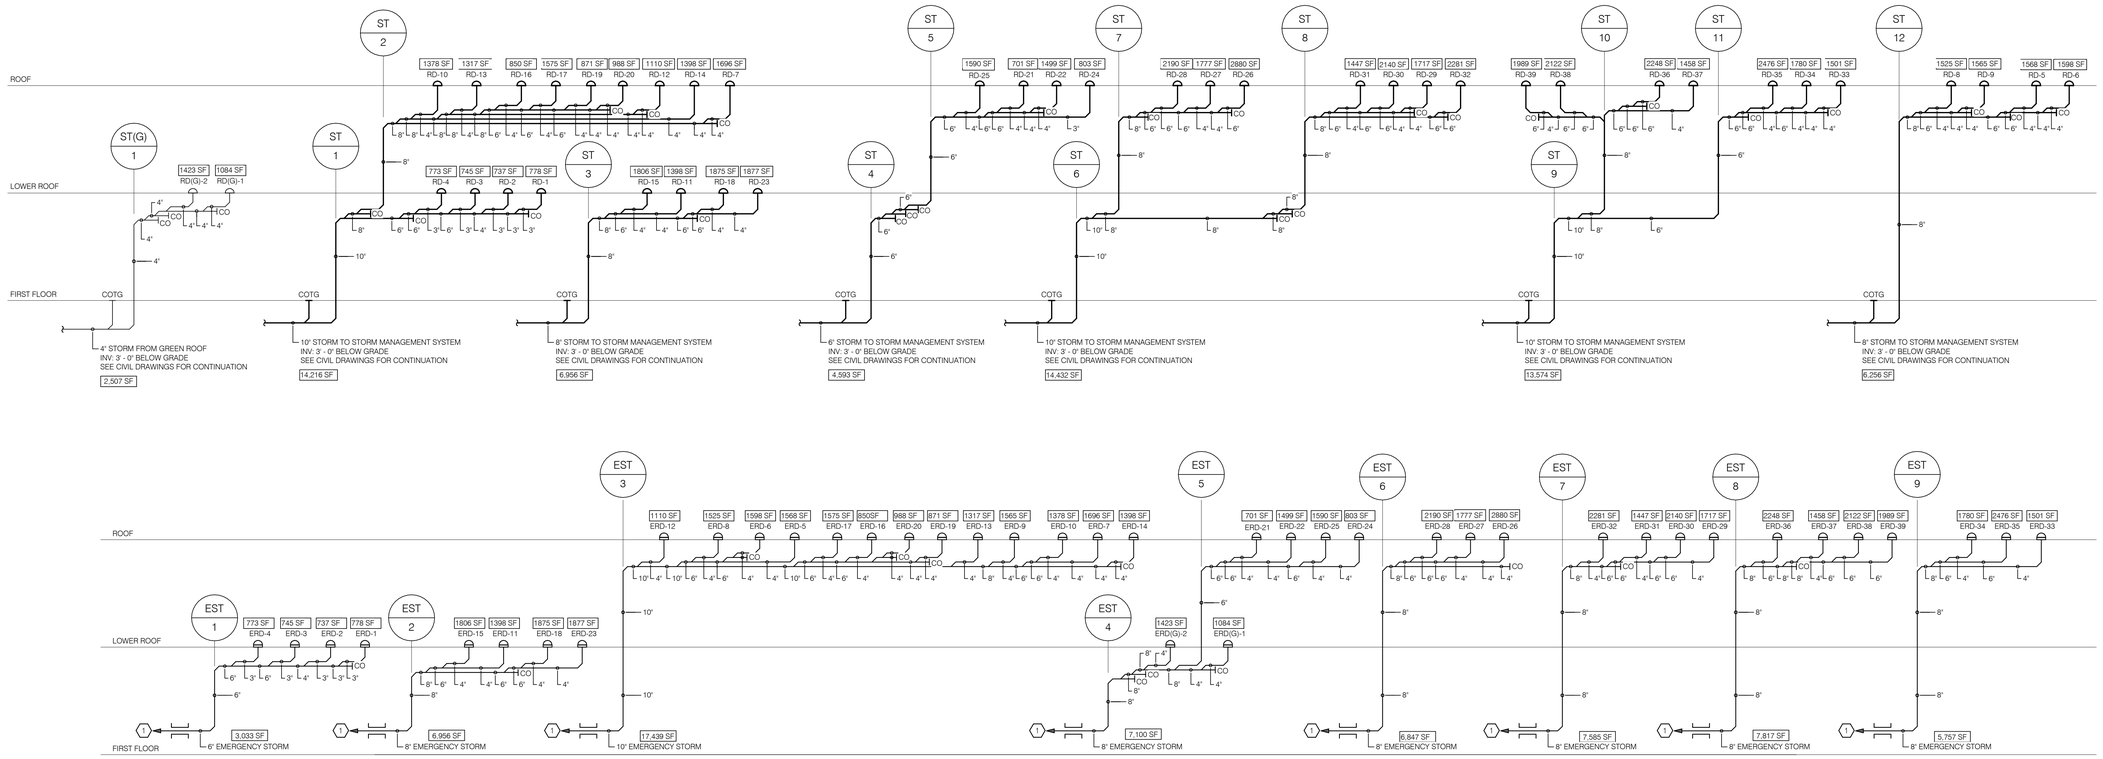

NOTE:

1. EMERGENCY STORM DRAIN DISCHARGE TO GRADE PIPE 18"-24" ABOVE FINISHED GRADE. PROVIDE DISCHARGE NOZZLE WITH SCREEN. COORDINATE WITH CIVIL PLANS FOR GRADE ELEVATION.

1 / P-5.5H REGULAR & EMERGENCY STORM RISER DIAGRAM

SCALE: NOT TO SCALE

Primary Roof Drains and Vertical Leader Calculation Form

Roof Drain	Area to be calculated/roof and vertical wall	Total area to be drained	Rainfall to be drained	Capacity per Drain	Size of Roof Drain/Vertical Leader	Storm Riser
No	(ft)	(ft²)	(ft² x in/hr/ft²)=in/hr	in/hr x0.0104=GPM	in	#
RD(G)-1		1084	3468.80	36	4	ST(G)-1
RD(G)-2		1423	4553.60	47	4	
RD-1		778	2489.60	26	3	ST-1 & ST-2
RD-2		737	2358.40	25	3	
RD-3		745	2384.00	25	3	
RD-4		773	2473.60	26	3	
RD-5		1568	5017.60	52	4	ST-12
RD-6		1598	5113.60	53	4	
RD-7		1696	5427.20	56	4	ST-1 & ST-2
RD-8		1525	4880.00	51	4	ST-12
RD-9		1565	5008.00	52	4	
RD-10		1378	4409.60	46	4	ST-1 & ST-2
RD-11		1398	4473.60	47	4	ST-3
RD-12		1110	3552.00	37	4	ST-1 & ST-2
RD-13		1317	4214.40	44	4	
RD-14		1398	4473.60	47	4	
RD-15		1806	5779.20	60	4	ST-3
RD-16		850	2720.00	28	4	ST-1 & ST-2
RD-17		1575	5040.00	52	4	
RD-18		1875	6000.00	62	4	ST-3
RD-19		871	2787.20	29	4	ST-1 & ST-2
RD-20		988	3161.60	33	4	
RD-21		701	2243.20	23	3	ST-4 & ST-5
RD-22		1499	4796.80	50	4	
RD-23		1877	6006.40	62	4	ST-3
RD-24		803	2569.60	27	3	ST-4 & ST-5
RD-25		1590	5088.00	53	4	
RD-26		2880	9216.00	96	6	ST-6, ST-7 & ST-8
RD-27		1777	5686.40	59	4	
RD-28		2190	7008.00	73	6	
RD-29		1717	5494.40	57	4	
RD-30		2140	6848.00	71	6	
RD-31		1447	4630.40	48	4	
RD-32		2281	7299.20	76	6	
RD-33		1501	4803.20	50	4	ST-9, ST-10 & ST-11
RD-34		1780	5696.00	59	4	
RD-35		2476	7923.20	82	6	
RD-36		2248	7193.60	75	6	
RD-37		1458	4665.60	49	4	
RD-38		2122	6790.40	71	6	
RD-39		1989	6364.80	66	6	
Total		62534		2081		

Emergency Roof Drains and Vertical Leader Calculation Form

Roof Drain	Area to be calculated/roof and vertical wall	Total area to be drained	Rainfall to be drained	Capacity per Drain	Size of Roof Drain/Vertical Leader	Storm Riser
No	(ft)	(ft²)	(ft² x in/hr/ft²)=in/hr	in/hr x0.0104=GPM	in	#
ERD(G)-1		1084	3468.80	36	4	EST-4
ERD(G)-2		1423	4553.60	47	4	
ERD-1		778	2489.60	26	3	EST-1
ERD-2		737	2358.40	25	3	
ERD-3		745	2384.00	25	3	
ERD-4		773	2473.60	26	3	
ERD-5		1568	5017.60	52	4	EST-3
ERD-6		1598	5113.60	53	4	
ERD-7		1696	5427.20	56	4	
ERD-8		1525	4880.00	51	4	
ERD-9		1565	5008.00	52	4	
ERD-10		1378	4409.60	46	4	
ERD-11		1398	4473.60	47	4	EST-2
ERD-12		1110	3552.00	37	4	EST-3
ERD-13		1317	4214.40	44	4	
ERD-14		1398	4473.60	47	4	
ERD-15		1806	5779.20	60	4	EST-2
ERD-16		850	2720.00	28	4	EST-3
ERD-17		1575	5040.00	52	4	
ERD-18		1875	6000.00	62	4	EST-2
ERD-19		871	2787.20	29	4	EST-3
ERD-20		988	3161.60	33	4	
ERD-21		701	2243.20	23	3	EST-4 & EST-5
ERD-22		1499	4796.80	50	4	
ERD-23		1877	6006.40	62	4	EST-2
ERD-24		803	2569.60	27	3	EST-4 & EST-5
ERD-25		1590	5088.00	53	4	
ERD-26		2880	9216.00	96	6	EST-6
ERD-27		1777	5686.40	59	4	
ERD-28		2190	7008.00	73	6	
ERD-29		1717	5494.40	57	4	EST-7
ERD-30		2140	6848.00	71	6	
ERD-31		1447	4630.40	48	4	
ERD-32		2281	7299.20	76	6	
ERD-33		1501	4803.20	50	4	EST-9
ERD-34		1780	5696.00	59	4	
ERD-35		2476	7923.20	82	6	
ERD-36		2248	7193.60	75	6	
ERD-37		1458	4665.60	49	4	EST-8
ERD-38		2122	6790.40	71	6	
ERD-39		1989	6364.80	66	6	
Total		62534		2081		

SETTY
ONE SOUTH STREET, SUITE 1110
BALTIMORE, MARYLAND 21202
TEL 667-329-6035
MECHANICAL ENGINEERS • ENERGY MANAGEMENT
ENERGY MANAGEMENT SERVICES • ENERGY SERVICES
CITY OF BALTIMORE • BALTIMORE COUNTY
DISTRICT OF COLUMBIA • MARYLAND
www.SETTY.com

PROJECT NUMBER: SA2017-F-8-F-F

11720 Beltsville Drive
Suite 600
Calverton, MD 20705
Tel: 301.595.1000
www.grimmandparker.com
GRIMM AND PARKER

GP# 21553

PLUMBING STORM RISER DIAGRAM

HOLABIRD ACADEMY PK-8
CITY OF BALTIMORE, MARYLAND

DATE	DESCRIPTION

P-5.5H

03/13/2017
BID SET

© GRIMM AND PARKER, P.C. 2014