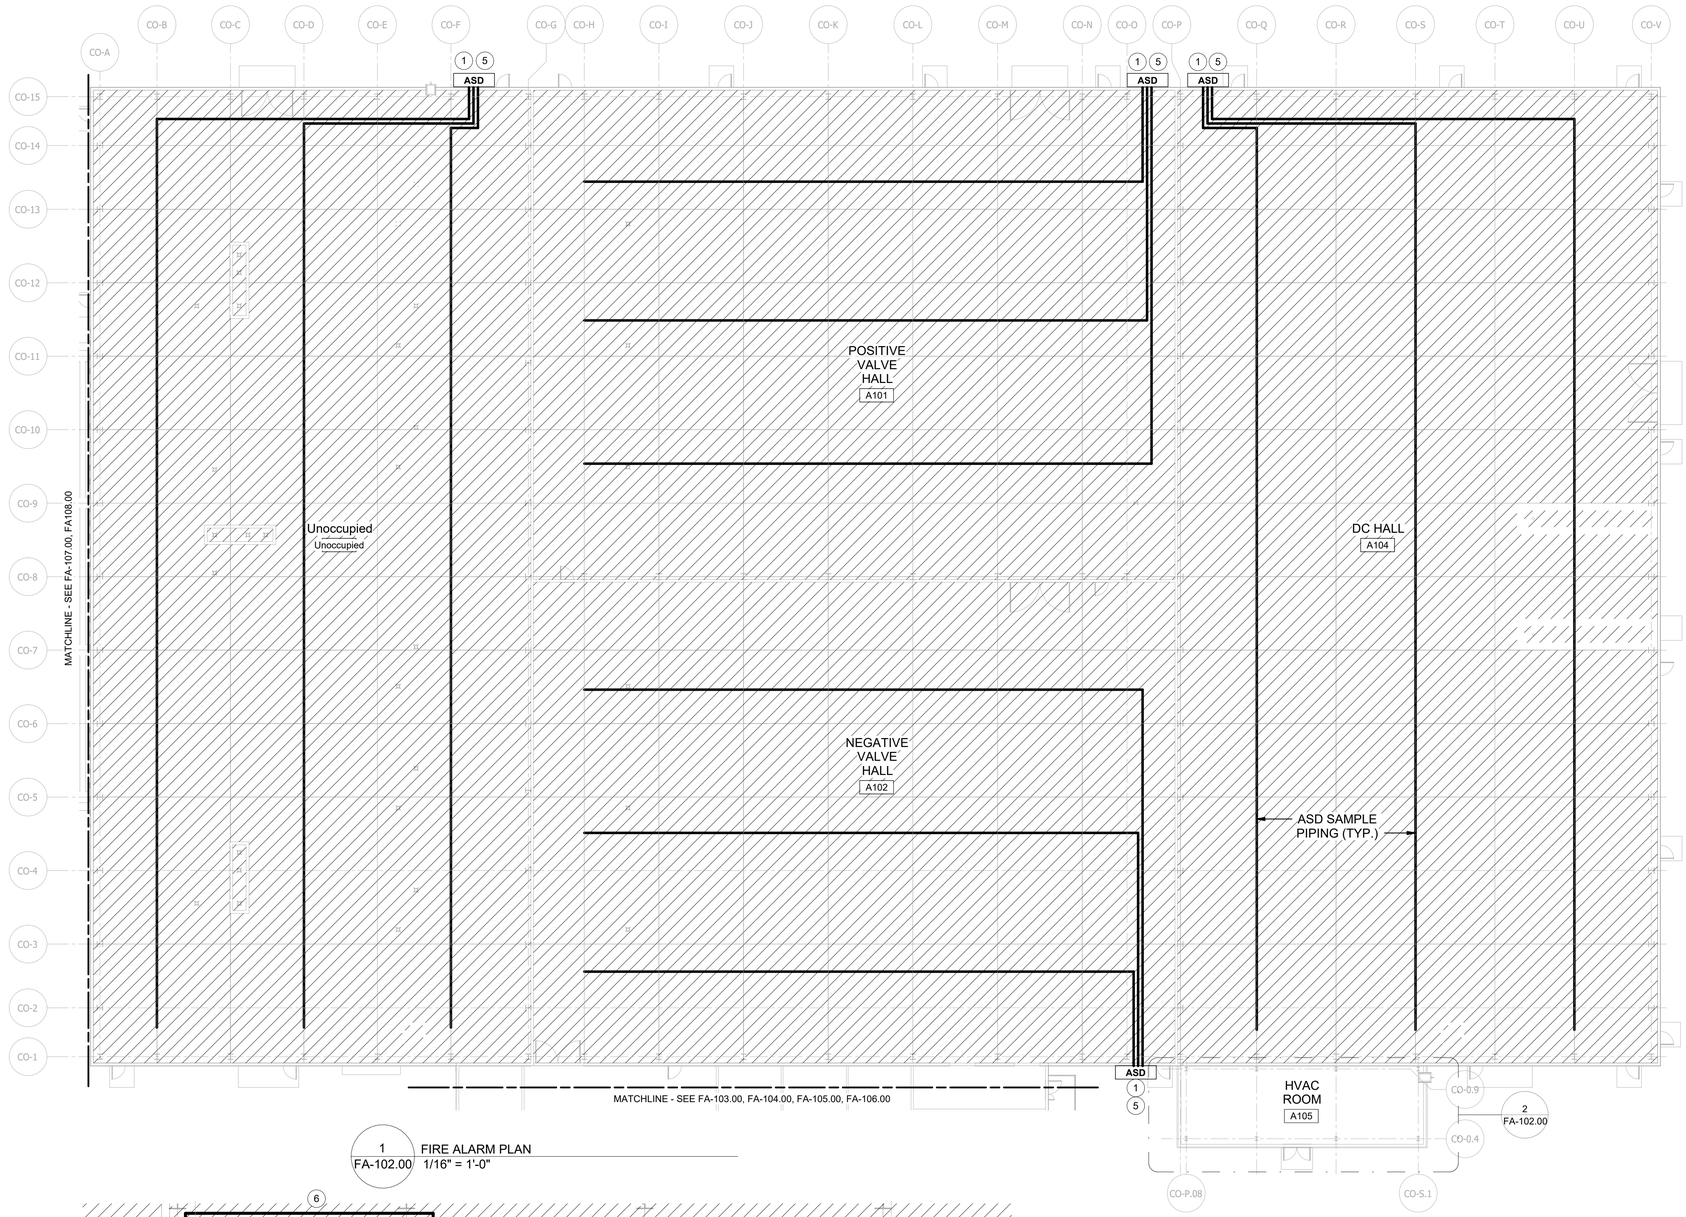

1 FA-102.00 FIRE ALARM PLAN
1/16" = 1'-0"

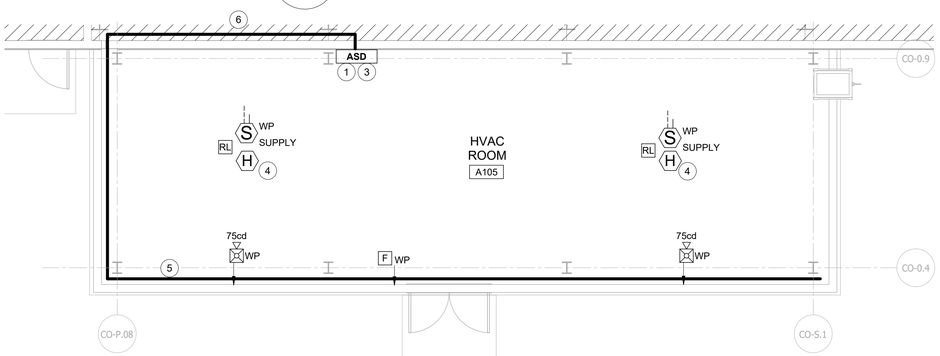

2 FA-102.00 HVAC ROOM ENLARGED FIRE ALARM PLAN
3/16" = 1'-0"

FIRE ALARM HATCH LEGEND

	VESDA ASPIRATING SMOKE DETECTION THROUGHOUT

KEYNOTES

1. PROVIDE AIR SAMPLING CONTROL UNIT WITHIN AN OUTDOOR NEMA 4 TEMPERATURE-CONTROLLED CABINET.
2. LINEAR HEAT DETECTION CIRCUIT SHALL BE MONITORED BY RSFACU LOCATED WITHIN FIRE PUMP ENCLOSURE. REFER TO MECHANICAL AND ELECTRICAL DRAWINGS INCLUDED IN SEPARATE PERMIT APPLICATION.
3. AIR-SAMPLING DETECTOR SHALL ACT AS A REFERENCE DETECTOR TO THE DC HALL AIR-SAMPLING DETECTORS, AND SHALL BE CONNECTED TO THOSE DETECTORS VIA A VESDA-NET CIRCUIT.
4. HEAT DETECTORS SHALL BE INSTALLED AT BOTTOM OF ROOF DECK.
5. SAMPLING PIPE ROUTING SHOWN IS SCHEMATIC IN NATURE. ACTUAL PIPE ROUTING AND SAMPLE POINTS SHALL BE DETERMINED BASED ON ACTUAL EQUIPMENT LOCATIONS UNIQUE TO EACH CONVERTER HALL. FINAL CONFIGURATION SHALL BE VERIFIED USING MANUFACTURER-SPECIFIC SOFTWARE TO CONFIRM TRANSPORT TIME AND DETECTION THRESHOLD PERFORMANCE CRITERIA.
6. SAMPLE PIPING SHOWN TO RUN THROUGH DC HALL TO WARM SAMPLING AIR PRIOR TO ENTERING CONTROL UNIT.



ISSUED FOR PERMIT

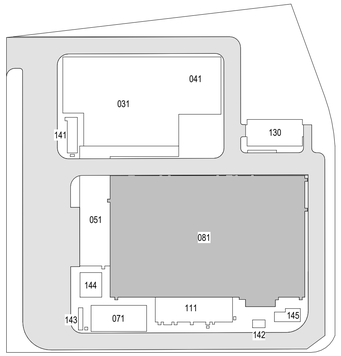

KEY PLAN
N.T.S.

PLAN NORTH

Poole Fire Protection
19910 West 161st Street
Olathe, KS 66062
913.829.8600 office ▲ 913.829.8690 fax

19910 W. 161st STREET
OLATHE, KS. 66062

SOWINSKI SULLIVAN
ARCHITECTURE • ENGINEERING

25 Mohawk Avenue
Sparta, NJ 07871

CONFIDENTIAL

THESE DRAWINGS ARE CONFIDENTIAL IN NATURE. ANY MISUSE OR UNAUTHORIZED DISTRIBUTION OF THE DRAWINGS CONTAINED HEREIN WILL BE A VIOLATION OF THIS CONFIDENTIALITY REQUIREMENT AND SUBJECT THE VIOLATOR TO LIABILITY. REVIEW OF THESE MATERIALS BY RECEIPT SHALL CONSTITUTE ACCEPTANCE OF THESE TERMS AND THE TERMS OF ANY UNDERLYING CONFIDENTIALITY AGREEMENT WE MAY HAVE EXCLUDED IN OBTAINING THIS INFORMATION FROM A THIRD PARTY. IF THE RECIPIENT IS NOT IN AGREEMENT WITH THE OBLIGATION OF CONFIDENTIALITY THEN THE DRAWINGS SHALL BE RETURNED TO THE ORIGINATOR.

REV	DESCRIPTION	DRW BY	CHK BY	DATE
B	FINAL SUBMISSION	AWP	SAB	12/12/2022
A	INTERIM SUBMISSION	AWP	SAB	09/13/2022

Kiewit
470 Chestnut Ridge Rd # 2,
Woodcliff Lake, NJ 07677

Hitachi Energy
901 Main Campus Drive
Raleigh, North Carolina 27606

PROJECT

CHPE
Champlain Hudson Power Express

Astoria HVDC Converter Station

31-45 20th Avenue, Astoria, Queens NY 11105
Block #850 - Lot #310 - BIN #4624437

CONVERTER BUILDING - FIRE ALARM PLAN

STATE OF NEW YORK
102980
LICENSED PROFESSIONAL ENGINEER
12/12/22

DATE	12/12/2022
PROJECT NO	105121
DRAWING BY	S. BRINKMEYER
CHECKED BY	A. POOLE
DRAWING NO	FA-102.00
CADD FILE N0	Autodesk Docs://CHPE Astoria/CHA-KIE-081-00-M3-FP-001.rvt

12/20/2022 4:14:41 PM