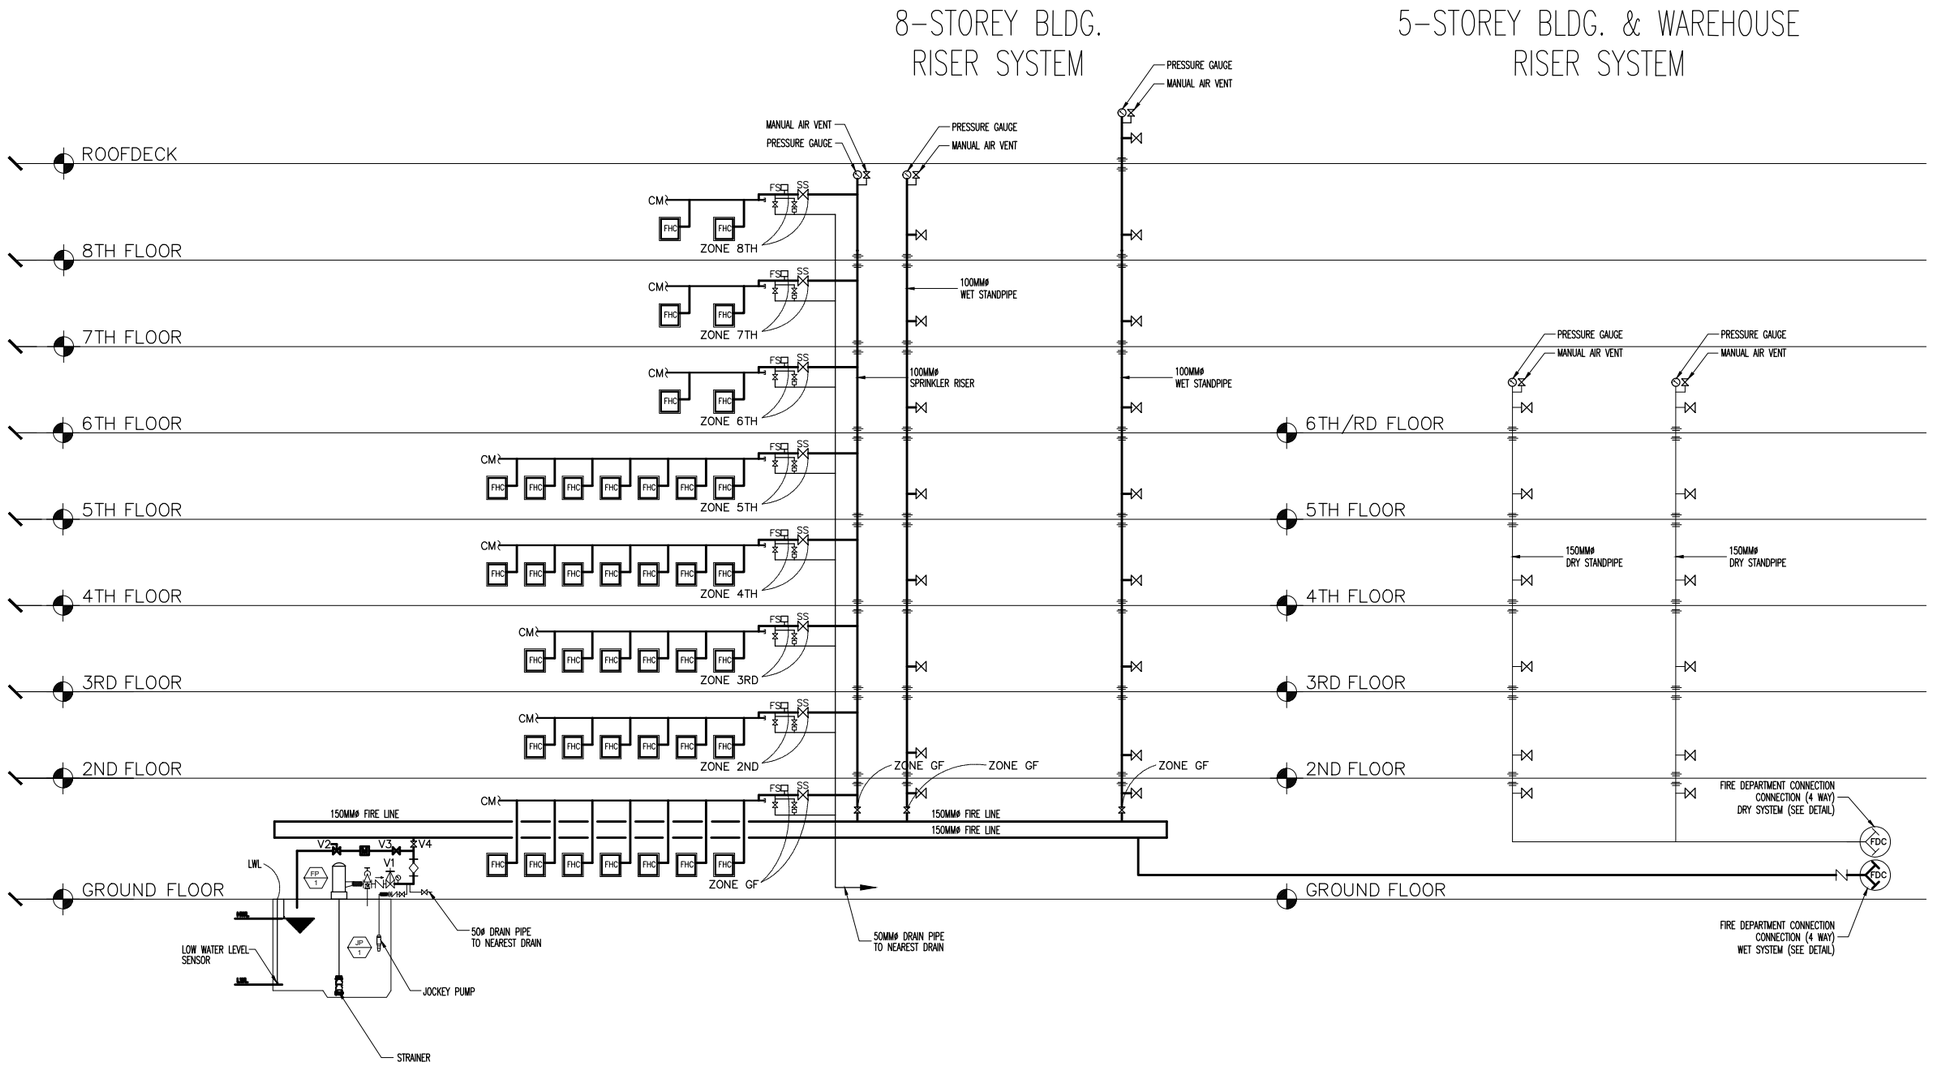

ZONING ARRANGEMENT				
LOCATION	ZONE DESIGNATION	ALARM		REMARKS
		FIRE FLOW SWITCH	TROUBLE SUPERVISORY SWITCH	
1. GROUND FLOOR	GF	✓	✓	4-SS, 1-FS
2. SECOND FLOOR	2F	✓	✓	1-SS, 1-FS
3. THIRD FLOOR	3F	✓	✓	1-SS, 1-FS
4. FOURTH FLOOR	4F	✓	✓	1-SS, 1-FS
5. FIFTH FLOOR	5F	✓	✓	1-SS, 1-FS
6. SIXTH FLOOR	6F	✓	✓	1-SS, 1-FS
7. SEVENTH FLOOR	7F	✓	✓	1-SS, 1-FS
8. EIGHTH FLOOR	8F	✓	✓	1-SS, 1-FS
PUMP ROOM				
SUPERVISORY SWITCH	PR-S	-	✓	2-SS
LOW WATER LEVEL	PR-L	-	✓	
PUMP RUNNING	PR-R	✓	-	F-PUMP CONTROLLER

VALVE DESCRIPTION		
ITEM NO.	DESCRIPTION	REMARKS
V-1	PUMP ISOLATION VALVE	NORMALLY OPEN
V-2	METER ISOLATION VALVE	NORMALLY CLOSED
V-3	METER THROTTLING VALVE	NORMALLY CLOSED
V-4	RISER ISOLATION VALVE	NORMALLY OPEN

A FP-08 FIRE PROTECTION SCHEMATIC RISER DIAGRAM

SCALE 1:100

CONSULTANT		OWNER	APPROVED BY:	PROJECT TITLE	SHEET CONTENT/S :	ISSUE NO.	REVISIONS	NO.	DATE		DATE	SHEET NO.
E. H. SISON ENGINEERS, CO. ENGINEERS * PLANNERS * CONSULTANTS 3431 GUERNICA ST., PALANAN, MAKATI CITY TEL. Nos. 8317115, 8337030	RAMON D. AGUILOS PROFESSIONAL MECHANICAL ENGINEER PTR NO.: 2464195 D PRC NO. : 2736 DATE : 01-05-22 TIN. NO. : 137-133-799 PLACE : QUEZON CITY	PDIC	CYRUS T. GALANG VICE PRESIDENT ADMINISTRATIVE SERVICES GROUP	RENOVATION OF PDIC BUILDING IN CHINO ROCES LOCATION: 2228 CHINO ROCES AVENUE, MAKATI CITY	FIRE PROTECTION SCHEMATIC RISER DIAGRAM					DESIGNED BY: RDAEC CADD BY: RJA CHECKED BY: APPROVED BY: SCALE: AS SHOWN		FP-08