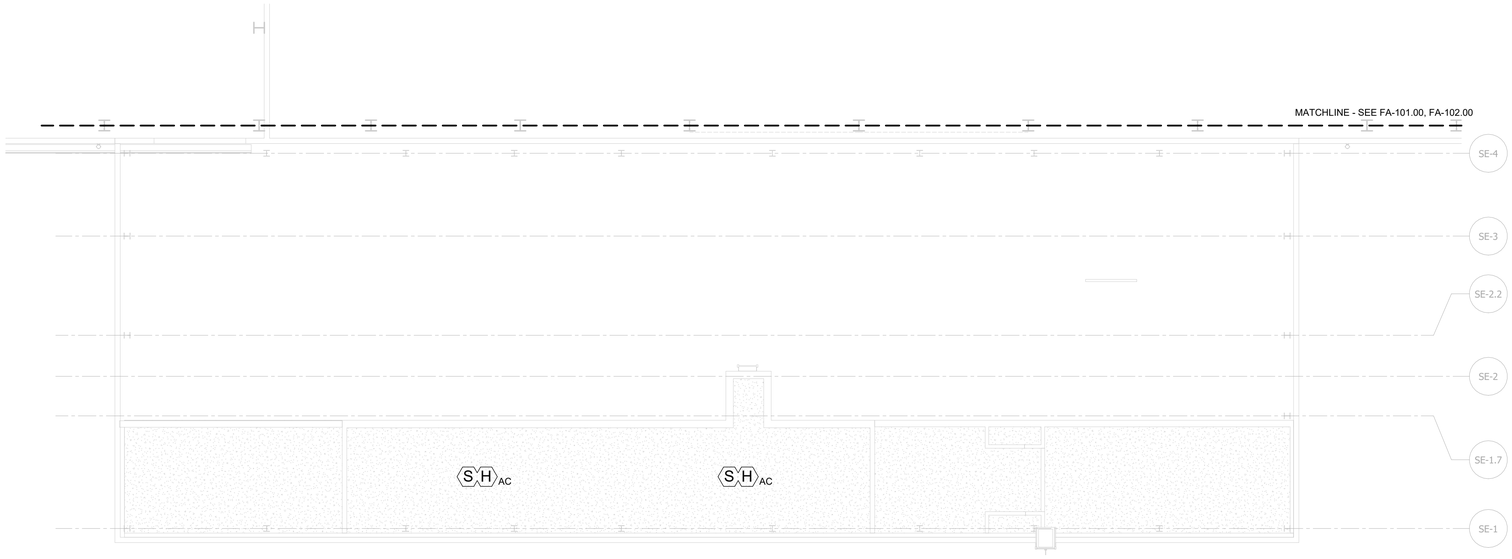

1 FA-106.00 FIRE ALARM PLAN - SECOND FLOOR ABOVE CEILING
1/8" = 1'-0"

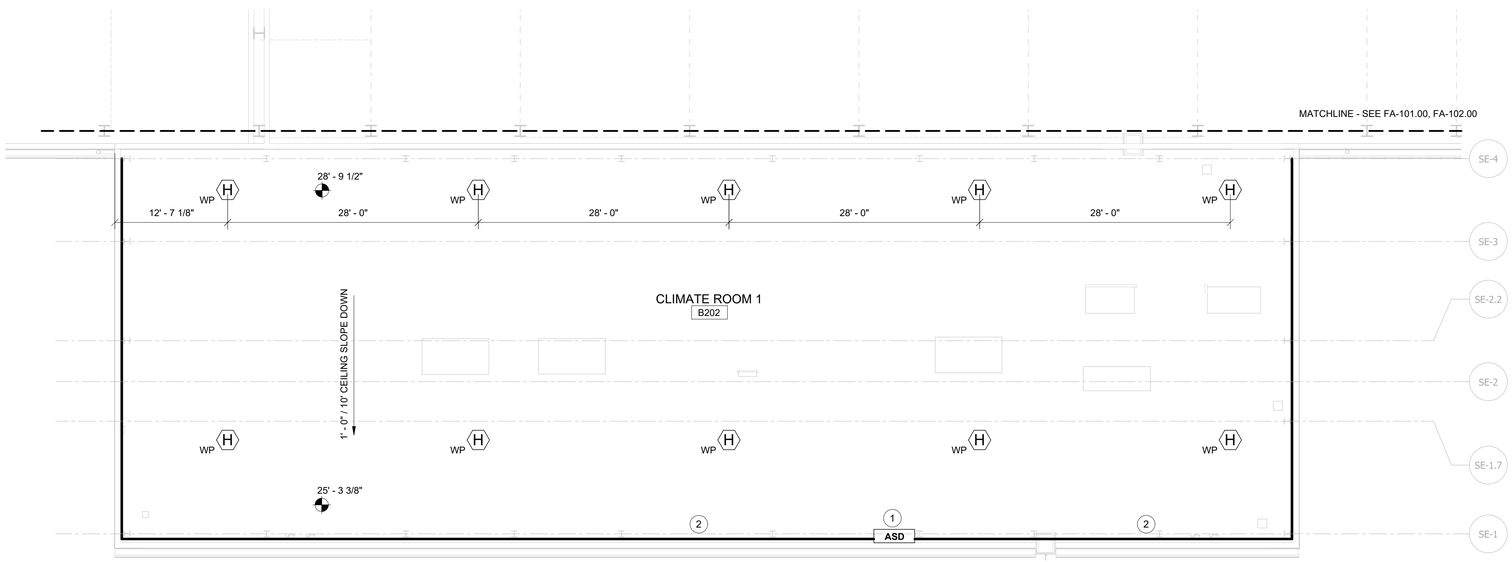

2 FA-106.00 FIRE ALARM PLAN - SECOND FLOOR RCP
1/8" = 1'-0"

KEYNOTES

1. AIR-SAMPLING DETECTOR CONTROL UNIT TO BE LOCATED IN SECOND FLOOR CLEAN AGENT ROOM. DETECTOR SHALL ACT AS A REFERENCE DETECTOR TO THE AIR-SAMPLING DETECTORS SERVING THE CONVERTER HALLS AND VALVE HALL HVAC UNITS, AND SHALL BE CONNECTED TO THOSE DETECTORS VIA A VESDA-NET CIRCUIT.
2. SAMPLING PIPE ROUTING SHOWN IS SCHEMATIC IN NATURE. PIPING SHALL BE INSTALLED ALONG INSIDE FACE OF MAKEUP AIR LOUVERS. PIPE ROUTING AND NUMBER OF PIPES ALONG THE FACE OF THE LOUVERS SHALL BE DETERMINED USING MANUFACTURER-SPECIFIC SOFTWARE TO CONFIRM TRANSPORT TIME AND PERFORMANCE CRITERIA. PIPING SHALL BE RUN WITHIN CONDITIONED SPACE ABOVE/WITHIN STORAGE ROOM B204, CORRIDOR B203, CLEAN AGENT ROOM B201, AND TELECOM ROOM B205 AS NEEDED TO ENSURE SAMPLED AIR HAS REACHED REQUIRED TEMPERATURE PRIOR TO ENTERING THE DETECTOR.

ISSUED FOR PERMIT

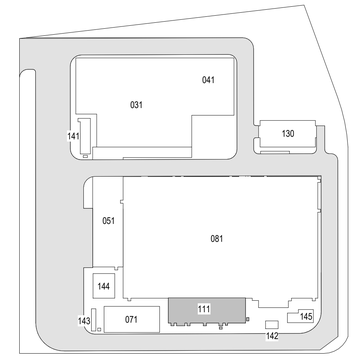

KEY PLAN
N.T.S.

PLAN NORTH

Poole Fire Protection
19910 West 161st Street
Olathe, KS 66062
913.829.8000 office ▲ 913.829.8080 fax

19910 W. 161st STREET
OLATHE, KS. 66062

SOWINSKI SULLIVAN
ARCHITECTURE • ENGINEERING

25 Mohawk Avenue
Sparta, NJ 07871

CONFIDENTIAL

THESE DRAWINGS ARE CONFIDENTIAL IN NATURE. ANY MISUSE OR UNAUTHORIZED DISTRIBUTION OF THE DRAWINGS CONTAINED HEREIN WILL BE A VIOLATION OF THIS CONFIDENTIALITY REQUIREMENT AND SUBJECT THE VIOLATOR TO LIABILITY. REVIEW OF THESE MATERIALS BY RECEIPT SHALL CONSTITUTE ACCEPTANCE OF THESE TERMS AND THE TERMS OF ANY UNDERLYING CONFIDENTIALITY AGREEMENT WE MAY HAVE EXCLUDED IN OBTAINING THIS INFORMATION FROM A THIRD PARTY. IF THE RECIPIENT IS NOT IN AGREEMENT WITH THE OBLIGATION OF CONFIDENTIALITY THEN THE DRAWINGS SHALL BE RETURNED TO THE ORIGINATOR.

REV	DESCRIPTION	DRW BY	CHK BY	DATE
B	FINAL SUBMISSION	SAB	AWP	12/12/2022
A	INTERIM SUBMISSION	SAB	AWP	09/13/2022

Kiewit
470 Chestnut Ridge Rd # 2,
Woodcliff Lake, NJ 07677

Hitachi Energy
901 Main Campus Drive
Raleigh, North Carolina 27606



PROJECT

CHPE
Champlain Hudson Power Express

Astoria HVDC Converter Station

31-45 20th Avenue, Astoria, Queens NY 11105
Block #850 - Lot #310 - BIN #4624437

SERVICE BUILDING - FIRE ALARM PLAN

DATE	12/12/2022
PROJECT NO	105121
DRAWING BY	S. BRINKMEYER
CHECKED BY	A. POOLE
DRAWING NO	FA-106.00
CADD FILE N0 Autodesk Docs://CHPE Astoria/CHA-KIE-111-00-M3-FP-001.rvt	12 of 18

12/20/2022 4:20:40 PM