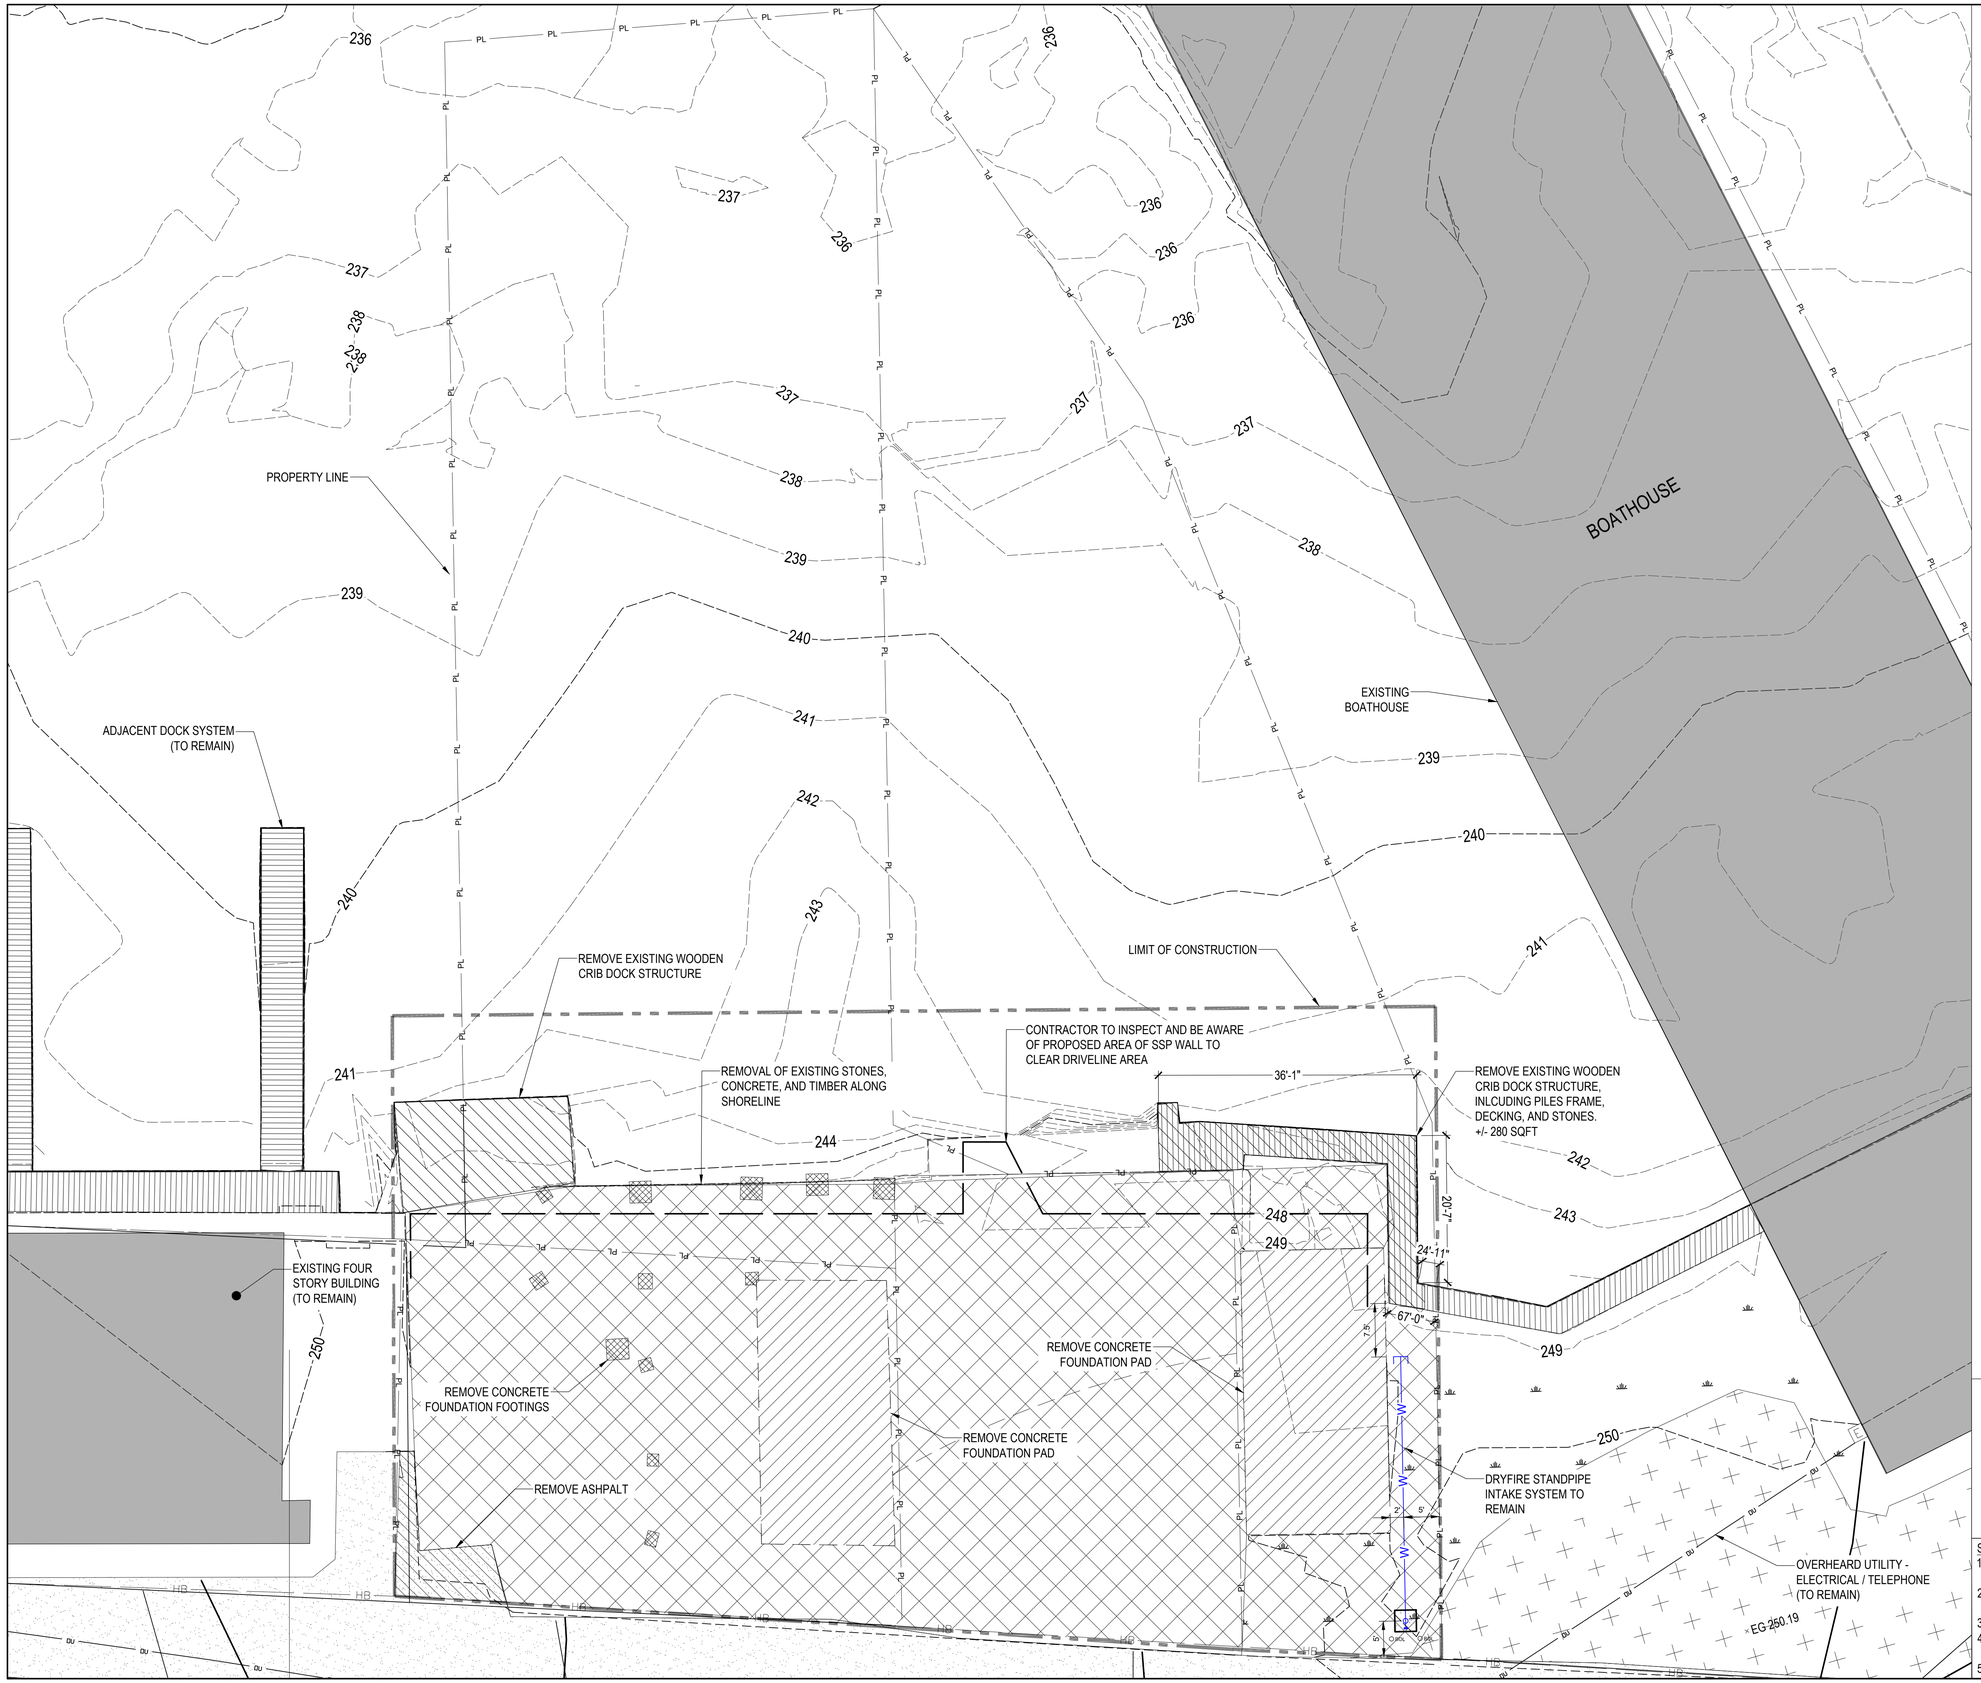

LEGEND:

- PL — PROPERTY LINE
- LIMITS OF CONSTRUCTION
- EOW — APPROX. EDGE OF WATER
- DEMO - SSP DRIVELINE
- DEMO - BUILDING FOUNDATION CONCRETE PAD
- DEMO - CONCRETE FOUNDATION FOOTINGS
- REMOVE GRAVEL AREA AND REPLACE WITH STONE AGGREGATE
- REMOVE GRAVEL AREA AND REPLACE WITH SOIL
- REMOVE ASPHALT AREA
- REMOVE DOCK AREA

DEMOLITIONS NOTES:

1. EXISTING STORM SEWERS AND EXISTING UTILITY STRUCTURES NOT DESIGNATED FOR DEMOLITION TO BE PROTECTED.
2. CONTRACTOR RESPONSIBLE FOR CLEARING DRIVE LINES FOR PROPOSED STEEL SHEET PILE (SSP).
3. UNLESS OTHERWISE NOTED, ALL ITEMS DESIGNATED FOR REMOVAL SHALL BECOME PROPERTY OF THE CONTRACTOR AND MUST BE REMOVED FROM THE SITE AND APPROPRIATELY HAULED AND PLACED.

SURVEY NOTES:

1. SURVEY PERFORMED BY PRUDENT ENGINEERING JULY 29-30, 2024, SURVEY CERTIFIED ON 08/20/2024.
2. RECORDED WATER LEVEL ON DAY OF BATHYMETRIC SURVEY (JULY 29, 2024) ELEV. = 245.50' NAVD88
3. HORIZONTAL DATUM IS NAD83 (2011)
4. COORDINATES ARE NEW YORK STATE PLANE COORDINATE SYSTEM, CENTRAL ZONE, US SURVEY FT
5. VERTICAL DATUM IS NAVD88. (NAVD88 = IGLD85 - 0.06')

Edgewater resources
518 Broad Street, Suite 200
Saint Joseph, MI 49085
P: 269.932.4502
edgewaterresources.com

PROJECT TITLE:
CAPE VINCENT MARINA
CONTRACT "A" DOCUMENTS
CAPE VINCENT, NY

SHEET TITLE:
DEMOLITION PLAN

DATE	REVISION

ISSUED FOR:
BIDDING

NOT FOR CONSTRUCTION

DATE: 10/28/2025
PROJ NO.: 21-031
NORTH

0 10 20
SCALE: 1" = 10 (AT 24"x36")

DESIGNED BY:	BG
DRAWN BY:	AE
REVIEWED BY:	----

THE REPRODUCTION, COPYING OR OTHER USE OF THIS DRAWING WITHOUT WRITTEN CONSENT IS PROHIBITED.
© 2025 EDGEWATER RESOURCES, LLC.

SHEET NUMBER:
D-1.01