© GRIMM AND PARKER, P.C. 2014

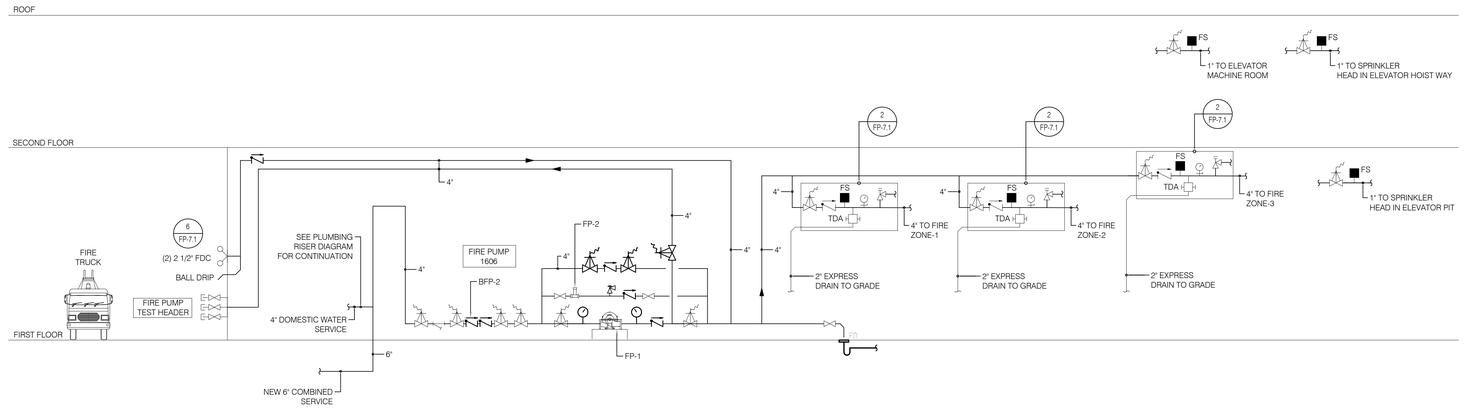

1 FP-5.1H FIRE PROTECTION RISER DIAGRAM
SCALE: NOT TO SCALE

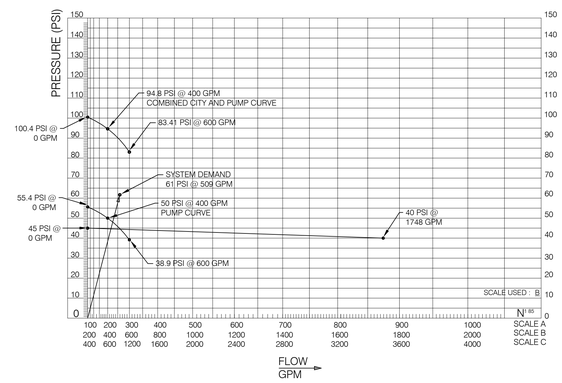

NOTE:
CONTRACTOR SHALL CONDUCT FLOW TEST TO VERIFY STREET PRESSURE AND FLOW PRIOR TO START OF WORK. DO NOT RELY ON FLOW TEST DATA IF DATA IS OLDER THAN ONE YEAR FROM THE TEST DATE.

2 FP-5.1H FLOW CHART
SCALE: NOT TO SCALE

City of Baltimore
DPW - Bureau of Water & Waste Water
Engineering Division - Analyser Office

- FIRE FLOW TEST -

W.O. No. 300379 Page: 1 of 1

Date: May 5, 2016 Time: 2:00 pm District: Broening Manor Plat No.: FF&GG-33

First Zone City of Baltimore

FLOW HYDRANTS "F"	Pitot Pressure (PSI)	Outlet Dia. (In.)	Flow (GPM)	Nozzle Void Coeff.	Corr. Flow (GPM)	F.H. Open	Main Size (In.)	Hydt. Make
FH-Charlotte Ave at Cardiff	15	4 ½	2106	0.83	1748	Full	8"	ADV

RESIDUAL HYDRANTS "R"	Static Press. (PSI) S	Residual Press. (PSI) R	Loss (S-R)	Loss At 20 PSI (S-20)	Calc. Flow at 20 PSI (GPM)	Dist. from Flow (Ft.)	Loss Per Ft.	Coeff. Of Main "C"	Main Size (In.)
Meter-1521 Charlotte Ave	45	40	5	25					8"

Requested by: MK Consulting **Representative:** **Hydr.:**

SKETCH

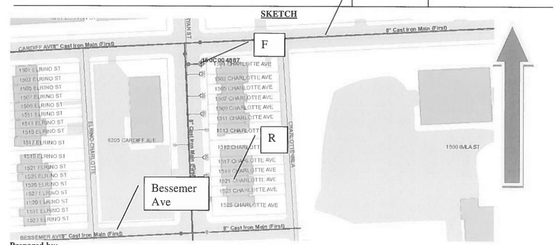

Prepared by:
Baldip Singh Suri
Baldip Singh Suri
(Engineer I)

Tel. (410) 396-0006 **2331 N Fulton Ave, Baltimore, MD 21217** **email: fireflowtest@baltimorecity.gov**

SETTY
ONE SOUTH STREET, SUITE 1110
BALTIMORE, MARYLAND 21202
TEL 667-329-8035
MANAGEMENT CONSULTANTS - PROGRAM MANAGEMENT
ENERGY MANAGEMENT SERVICES - DESIGN BUILD SERVICES
CONSTRUCTION MANAGEMENT - CONSTRUCTION SERVICES
DISTRICT OF COLUMBIA - MARYLAND
www.SETTY.com
SACOTTY@SETTY.COM
PROJECT NUMBER:

11720 Beltsville Drive
Suite 600
Calverton, MD 20705
Tel: 301.595.1000
www.grimmandparker.com

GRIMM AND PARKER

GP# 21553

FIRE PROTECTION RISER DIAGRAM
HOLABIRD ACADEMY PK-8
CITY OF BALTIMORE, MARYLAND

DATE	DESCRIPTION

FP-5.1H
03/13/2017
BID SET

© GRIMM AND PARKER, P.C. 2014