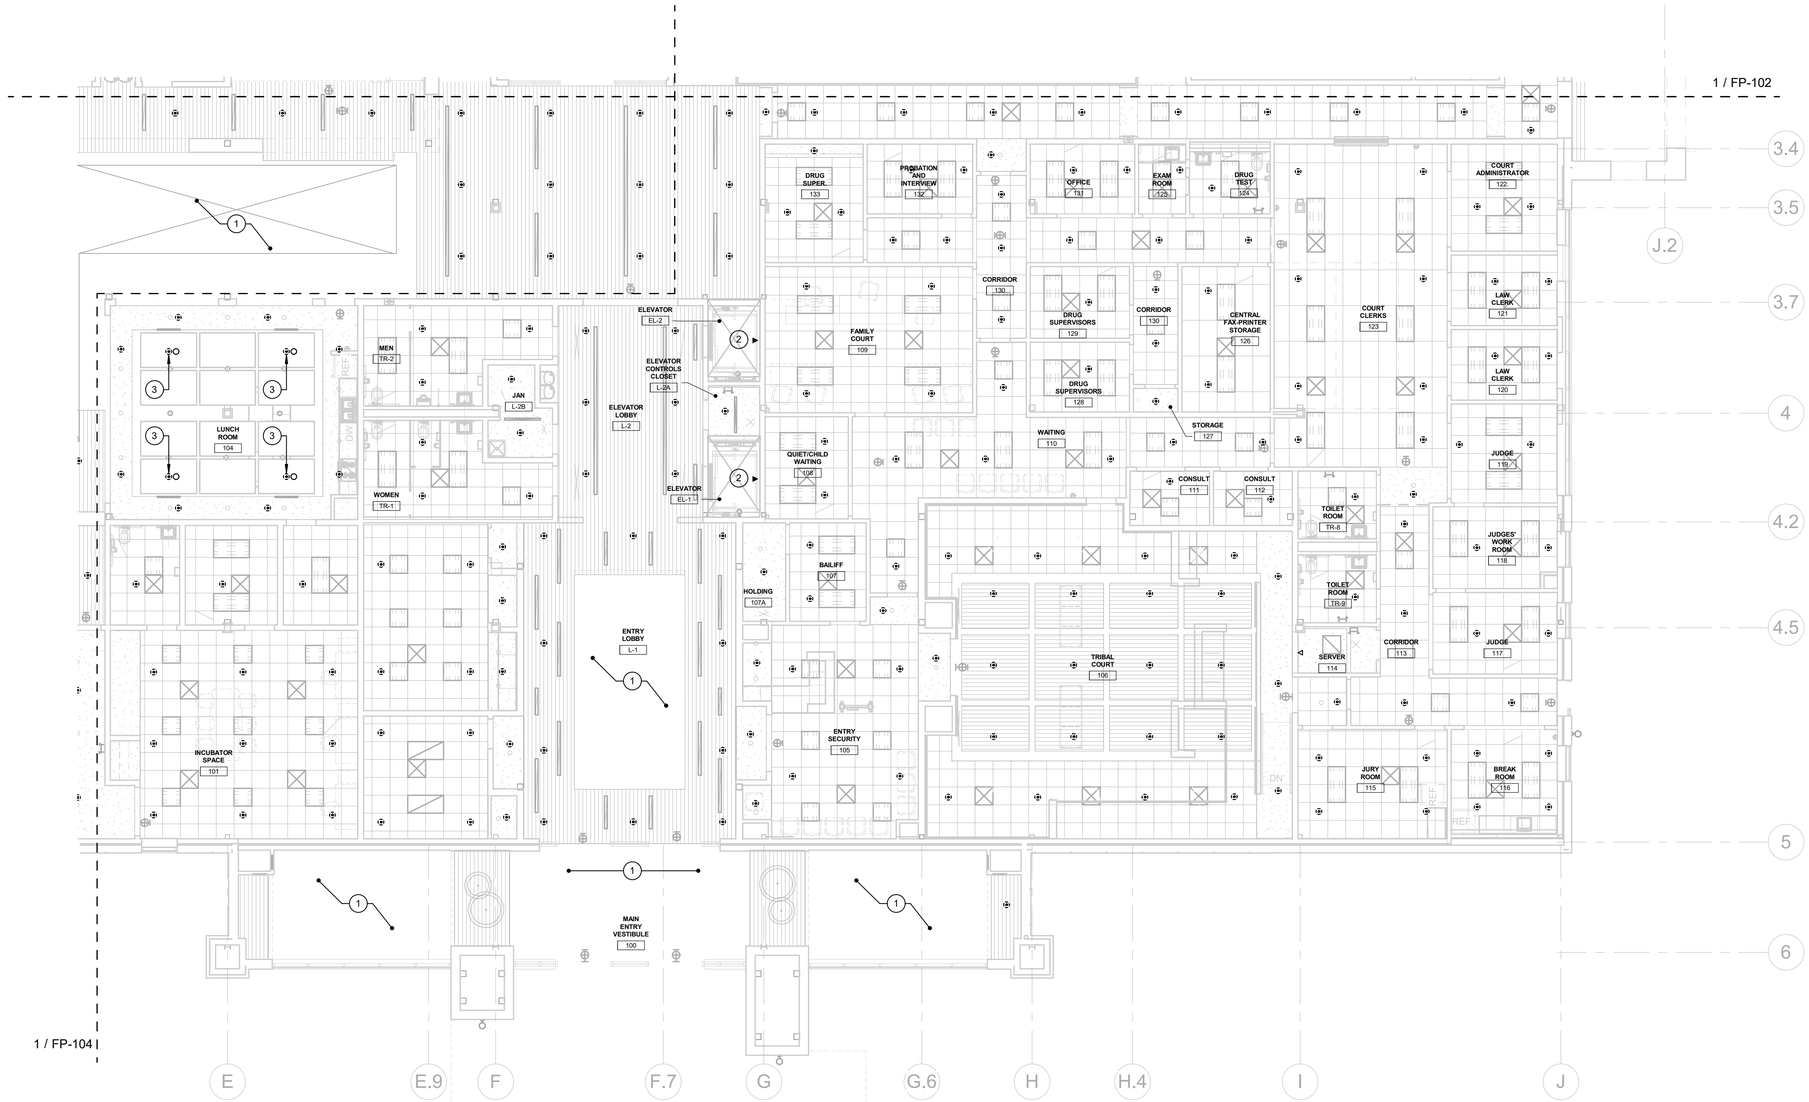

1 PARTIAL FIRST FLOOR PLAN - AREA A

1/8" = 1'-0"

GENERAL NOTES:

A. COORDINATE ALL SPRINKLER MAINS, BRANCHES AND HEAD LOCATIONS WITH ALL OTHER TRADES.

B. THE CONTRACTOR SHALL HYDRAULICALLY CALCULATE ALL SPRINKLER SYSTEMS AND SHALL SIZE THE PIPING ACCORDINGLY.

C. PROVIDE FULL SPRINKLER COVERAGE FOR ALL CONCEALED SPACES PER NFPA 13.

D. PROVIDE SPRINKLER HEAD UNDER ALL FIXED OBSTRUCTIONS WIDER THAN 4'-0" PER NFPA.

E. PROVIDE SPRINKLER HEAD(S) OFF THE DRY SYSTEM WHERE TEMPERATURE DROPS BELOW 40 DEGREES.

DRAWING NOTES:

1. OPEN TO ABOVE. REFER TO SECOND FLOOR PLAN FOR SPRINKLER HEADS.
2. PROVIDE SIDEWALL HEAD IN BOTTOM OF ELEVATOR SHAFT PER NPFA 13.
3. CONCEALED SPRINKLER HEAD TO PROTECT BELOW CEILING FEATURE.

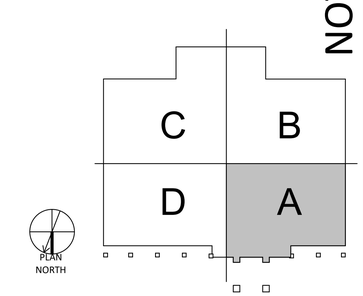

KEY PLAN

NOT FOR CONSTRUCTION

beardsley
architects + engineers

AUBURN
64 South Street
Auburn, NY 13021
315.253.7301

MALONE
320 West Main Street
Malone, NY 12953
518.483.1585

SYRACUSE
5789 Widewaters Pkwy
Dewitt, NY 13214
315.472.6980

EC4B engineering, p.c.
15 Schoen Place
Suite 300
Pittsford, NY 14534
Phone: (585) 641-7121
Fax: (585) 362-4175
www.ec4b.com

WARNING
Any alterations to this document not conforming to section 7307. New York State Education Law are strictly prohibited.

CONSTRUCTION DOCUMENTS
2/11/2022

Project Number: 18029

Drawn By: WAB

Designed By: NMG

Reviewed By: NMG

RENOVATIONS OF THE IGA BUILDING
Saint Regis Mohawk Tribe
850 NY-37, Hogansburg, NY 13655

no.	revision description	by	date

PARTIAL FIRST FLOOR PLAN - AREA A

FP-101

Beardsley Design Associates Architecture, Engineering, Landscape Architecture, D.P.C. ©

Filename: C:\Users\jcappotelli\Documents\17159 - IGA SRMT MEP Central_jcappotelli.rvt
2/11/2022 3:35:23 PM