GENERAL NOTES:

A. COORDINATE ALL SPRINKLER MAINS, BRANCHES AND HEAD LOCATIONS WITH ALL OTHER TRADES.

B. THE CONTRACTOR SHALL HYDRAULICALLY CALCULATE ALL SPRINKLER SYSTEMS AND SHALL SIZE THE PIPING ACCORDINGLY.

C. PROVIDE FULL SPRINKLER COVERAGE FOR ALL CONCEALED SPACES PER NFPA 13.

D. PROVIDE SPRINKLER HEAD UNDER ALL FIXED OBSTRUCTIONS WIDER THAN 4'-0" PER NFPA.

E. PROVIDE SPRINKLER HEAD(S) OFF THE DRY SYSTEM WHERE TEMPERATURE DROPS BELOW 40 DEGREES.

DRAWING NOTES:

1. PROVIDE SPRINKLER HEAD OFF THE DRY SPRINKLER SYSTEM.
2. PROVIDE TEMPERATURE RATED SPRINKLER HEAD UNDER SKYLIGHT.
3. CONCEALED SPRINKLER HEAD TO PROTECT BELOW CEILING FEATURE.

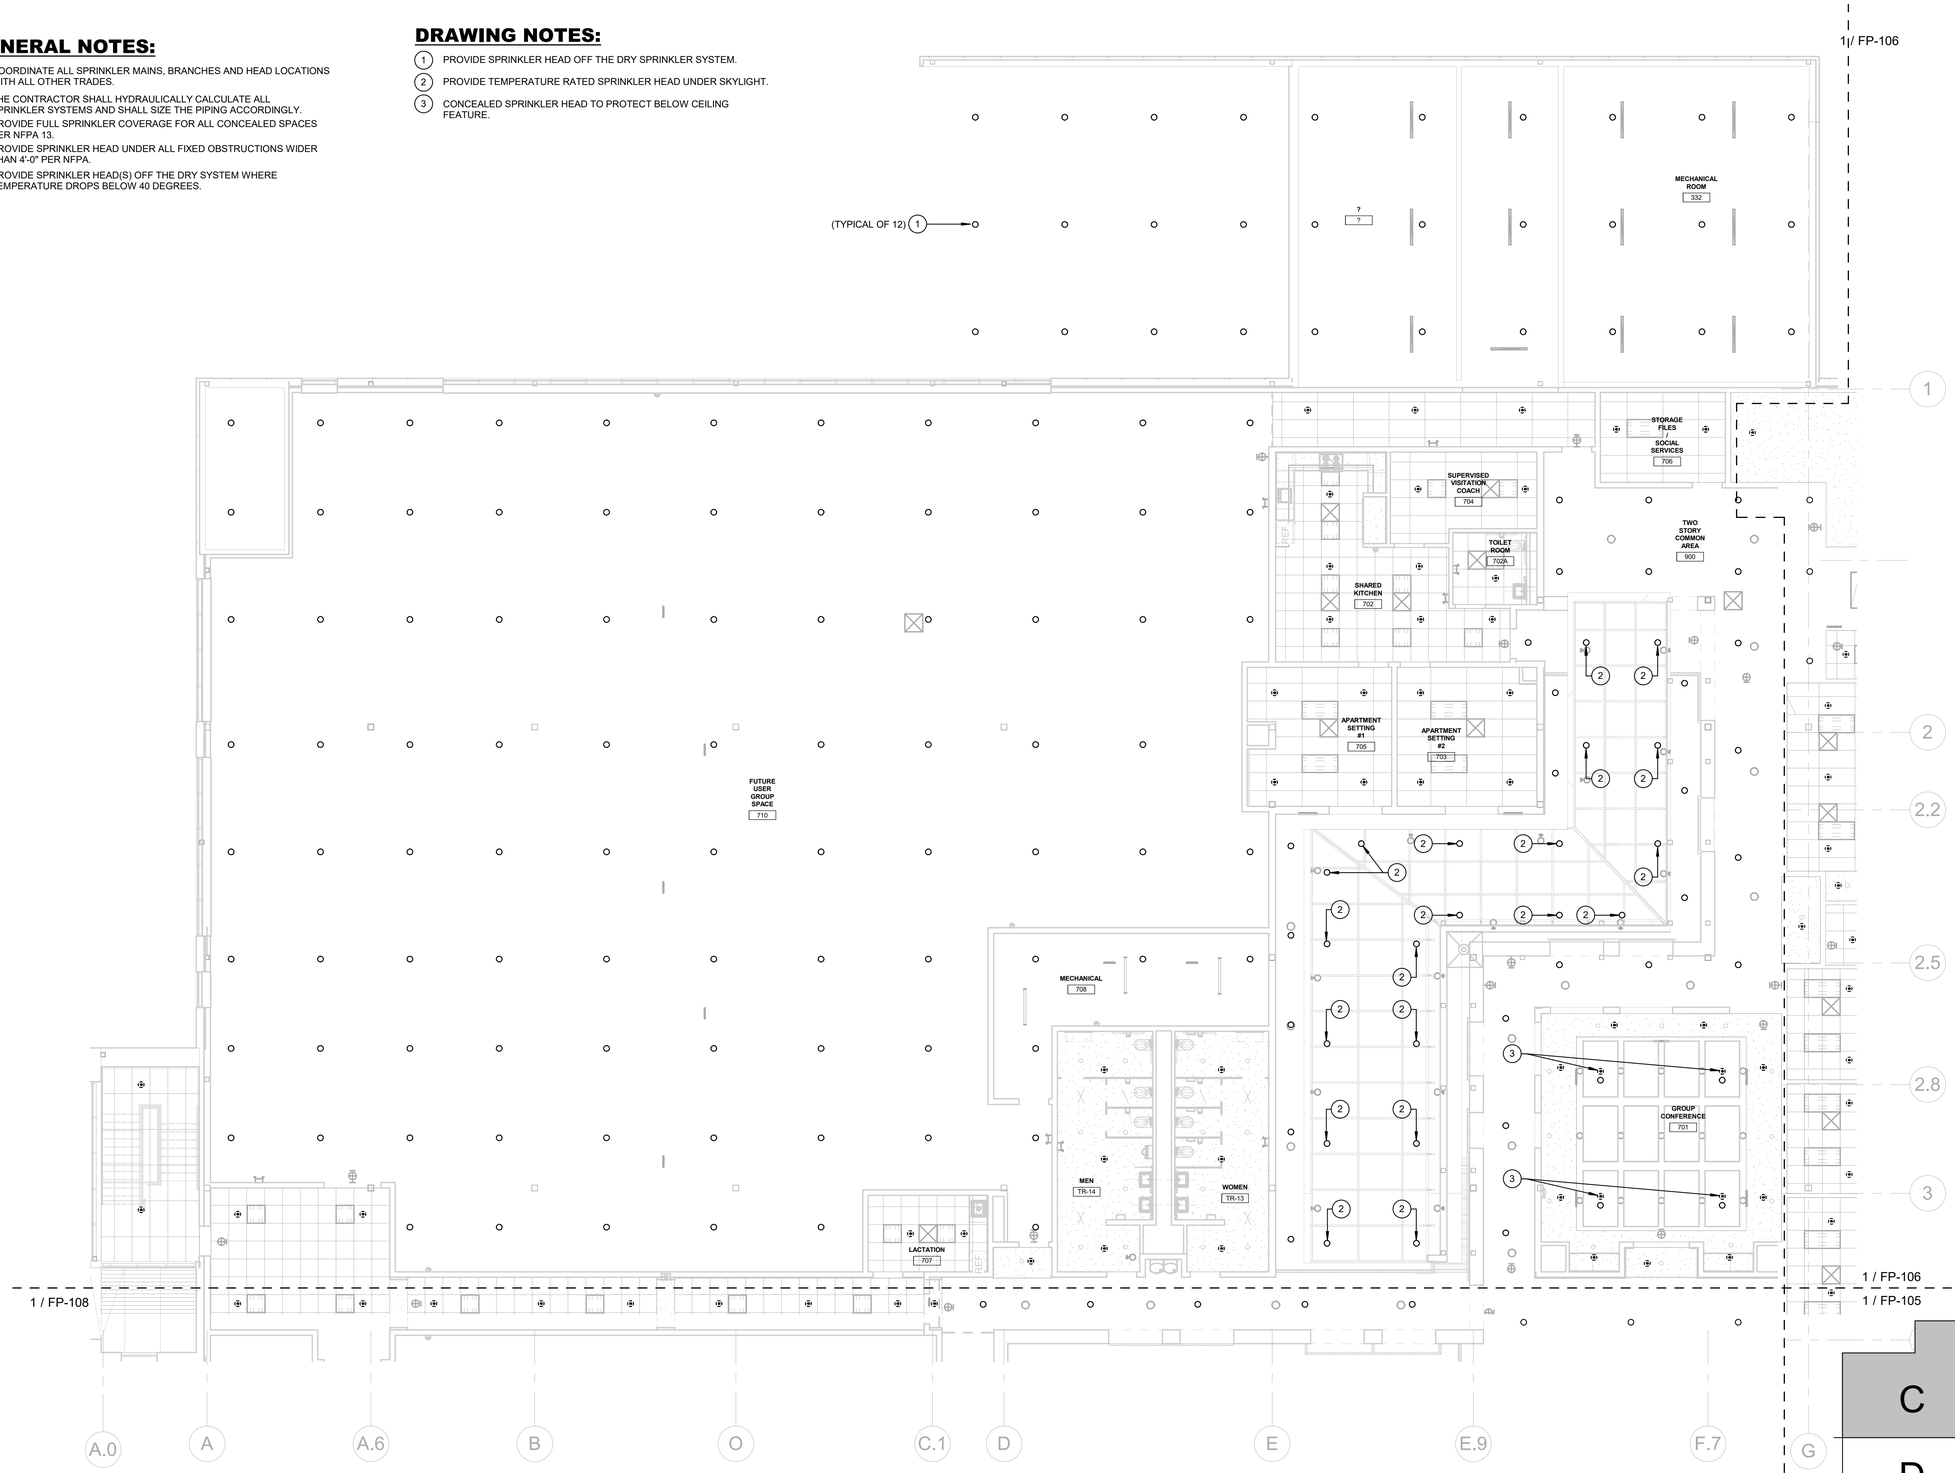

1 PARTIAL SECOND FLOOR PLAN - AREA C
1/8" = 1'-0"

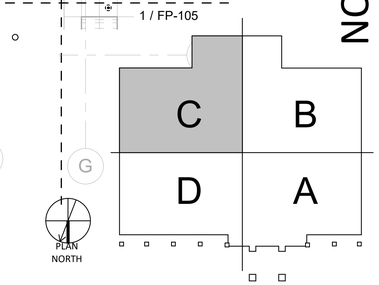

KEY PLAN

NOT FOR CONSTRUCTION

beardsley
architects + engineers

AUBURN
64 South Street
Auburn, NY 13021
315.253.7301

MALONE
320 West Main Street
Malone, NY 12953
518.483.1585

SYRACUSE
5789 Widewaters Pkwy
Dewitt, NY 13214
315.472.6980

EC4B engineering, p.c.
15 Schoen Place
Suite 300
Pittsford, NY 14534
Phone: (585) 641-7121
Fax: (585) 362-4175
www.ec4b.com

WARNING
Any alterations to this document not conforming to section 7307. New York State Education Law are strictly prohibited.

CONSTRUCTION DOCUMENTS
2/11/2022

Project Number: 18029

Drawn By: WAB
Designed By: NMG
Reviewed By: NMG

RENOVATIONS OF THE IGA BUILDING
Saint Regis Mohawk Tribe
850 NY-37, Hogansburg, NY 13655

no.	revision description	by	date

PARTIAL SECOND FLOOR PLAN - AREA C

FP-107

Filename: C:\Users\jpappotelli\Documents\17159 - IGA SRMT MEP Central_jpappotelli.rvt

2/11/2022 3:35:45 PM

Beardsley Design Associates Architecture, Engineering, Landscape Architecture, D.P.C. ©